



ENGINEERING MANUAL EM-7



AVK INDUSTRIAL PRODUCTS

A **PCC** COMPANY

MARKET LEADER IN BLIND THREADED INSERTS AND STUDS

AVK's Quality Management System is registered to ISO/TS16949 and ISO9001

AVK's Environmental Management System is registered to ISO14001



AVK is committed to protecting our environment. All standard in-house plating is RoHS compliant. AVK reserves the right to substitute orders placed under Non-RoHS compliant platings with a comparable Trivalent plating.



WELCOME TO THE WORLD OF AVK

AVK INDUSTRIAL PRODUCTS, located in Southern California, is a Precision Castparts Company. AVK manufactures blind installed threaded fasteners for transportation and general industrial markets world-wide. We feature product lines of both unified (INCH) and metric fasteners along with numerous special designs that meet customer application requirements.



At AVK, we are dedicated to...

“IMPROVING THE WAY WE ASSEMBLE THE WORLD™”

BLIND INSTALLED THREADED INSERTS AND STUDS

A blind installed threaded fastener is defined as a fastener with internal or external threads that can be installed into a panel, tube or other structure from the front side without need to see or access the backside, or “blind” side to complete the installation. Once installed the fastener remains captive to which a mating component can be attached using standard hardware.

This engineering manual contains technical information on all AVK standardized product lines including sales drawings and information on installation tooling.



WARRANTY

LIMITED WARRANTY AND EXCLUSIVE REMEDY

AVK Industrial Products division is a subsidiary of Precision Castparts (“Seller”). Seller warrants that products sold hereunder conform to industry standards specified herein and will be free from defects in materials and workmanship. THIS WARRANTY IS EXPRESSLY GIVEN IN LIEU OF ANY AND ALL OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND IN LIEU OF ANY OTHER OBLIGATION ON THE PART OR THE SELLER. Seller will, at its option, repair or replace free of charge (excluding all shipping and handling costs) any products which have not been subject to misuse, abuse or modification and which in its sole determination were not manufactured in compliance with the warranty given above.

It is expressly understood that any technical advice furnished by or on behalf of Seller with respect to the use of its goods or services is given without charge, and Seller assumes no obligations or liability for the advice given or results obtained. All such results being given and accepted is at Buyer’s Risk.

THE REMEDY PROVIDED FOR HEREIN SHALL BE THE EXCLUSIVE REMEDY FOR ANY BREACH OF WARRANTY OR ANY CLAIM ARISING IN ANY WAY OUT OF THE MANUFACTURE, SALE, OR USE OF THESE PRODUCTS. In no event shall Seller be liable for consequential, incidental or any other damages of any nature whatsoever except those specifically provided herein for any breach of warranty or any claim arising in any way out of the manufacture, sale, or use of these products. No other person is authorized by Seller to give any other warranty, written or oral, pertaining to the products.



ENGINEERING MANUAL

This engineering manual contains the full AVK product line, application ideas, features and benefits, sales drawings with dimensions and tolerances, material and finish specifications, and technical information on the selection and use of all installation tooling Systems.

PRODUCT INDEX

| | PAGE |
|--|---------|
| Welcome to the World of AVK | 2 |
| Capabilities | 4 |
| Product Introduction | 5 |
| Spinwall Technology and Installation Tool Types | 5 - 6 |
| Advantages | 7 |
| Typical AVK Applications | 8-9 |
|  A-L Series Knurled Threaded Insert | 10 - 11 |
|  A-K Series Knurled Threaded Insert | 12 - 13 |
|  A-H Series Threaded Hex Insert | 14 - 15 |
|  A-R Series Threaded Insert | 16 - 17 |
|  A-L Series Sealed Head Threaded Insert | 18 |
|  A-H Series Sealed Head Threaded Hex Insert | 19 |
|  A-S Series Captive Threaded Stud | 20 - 21 |
|  A-T Series Knurled Threaded Insert | 22 - 23 |
|  A-W Series Knurled Threaded Insert | 24 |
|  A-O Series Threaded Insert | 25 |
|  R-N Series Rivet Nut Threaded Insert | 26 - 27 |
|  E-L Metric Series Knurled Threaded Insert | 28 |
|  E-H Metric Series Threaded Hex Insert | 28 |
|  New Product Composi-sert™ | 29 |
|  New Product Compression Limitor | 30 |
| ARO Spin-Spin Pneumatic Tools | 31 - 35 |
| Pneumatic Rapid Insert Tool | 36 |
| SPP Tool™ Systems - Spin Pull to Pressure | 37 - 38 |
| Battery Powered Portable Tools | 39 - 40 |
| Hand Tools and Kits | 41 - 43 |
| Guidelines for Successful Applications | 44 |
| Basic Test Data | 45 |
| Dimensional Conversions | 46 |
| Plating Chart | 47 |




CAPABILITIES



AVK SALES PROFESSIONALS:

AVK's sales representatives and customer service staff are dedicated to assist our customers in providing demonstrations, samples, and technical support. Our global network of Authorized Distributors assist in these efforts and provide for our customer's logistical product needs.

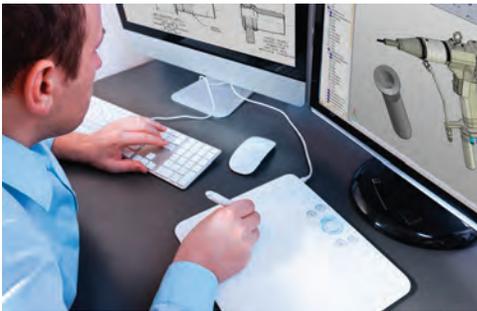

ENGINEERING SUPPORT:

AVK's engineering and installation tool support staff transforms our customers' needs and ideas into robust designs that have become industry standards for innovation and reliability.



MANUFACTURING:

Housed in a 80,000 sq. ft. facility, AVK utilizes state of the art cold forming equipment to produce net shape products at speeds of up to 240 pieces per minute. Secondary customized internal thread rolling, assembly equipment and a "Lean" manufacturing philosophy help to produce products that exceed our customers' expectations from quality and delivery.



QUALITY:

Our staff of quality experts are dedicated to the principles of ISO/TS16949 and ISO14001. They are continuously working to improve an already world class quality product to even higher levels.




PRODUCT INTRODUCTION


AVK has developed specific manufacturing technology that sets our products apart from other blind installed fastener manufacturers. We call what we do "Spinwall Technology™." AVK's Spinwall Technology™ blind installed fasteners consist of two types. Internally threaded inserts and externally threaded studs. Both products can be installed into a flat, tubular or other shaped materials using hand operated or pneumatic hand held tools right on your assembly line without adjustment even if the parent material varies in thickness. Our products can be installed after paint or other finishes is applied to your product which eliminates the need for thread masking.

INSTALLATION SEQUENCE


Here is how the AVK product is installed "blind."



1/4 turn the AVK fastener onto the tool's threaded mandrel.




The fastener is placed into the hole.



The forward trigger is depressed and the fastener is installed properly.



The reverse trigger is depressed and the tool unthreads from the installed fastener.



The mating component is then attached using conventional hardware.

SPINWALL TECHNOLOGY™ PRODUCT DESIGN



Round serrated body threaded insert for excellent spin out resistance in drilled or punched holes. Available in steel, aluminum, brass, and monel.



Hex Body threaded insert for punched holes provides exceptional spin out resistance. Available in steel, brass and 302 stainless steel.



Pre-Bulbed slotted body design for exceptional pull out resistance in drilled or punched holes in plastics, composites and thin sheet metal applications. Available in steel.



Round serrated body threaded stud is ideal as a location device to support heavy components before final installation with a mating nut. Available in steel.

SPINWALL TECHNOLOGY™

Spinwall Technology™ ...Sets AVK apart

You will notice throughout this catalog references to the phrase Spinwall Technology™. This phrase describes the philosophy of our product's design, manufacturing and installation systems.

Our Spinwall Technology™ products are manufactured on high-speed, state-of-the-art cold forming equipment on which very precise tolerances are achieved. This capability allows AVK to produce products with unique mechanical and installation properties that result in the AVK product filling the hole prior to backside flange formation. Read more about hole fill and the other advantages of Spinwall Technology™ on the separate product profile pages.

Our Spinwall Technology™ products can be installed using three different types of installation tooling...



INSTALLATION TOOL TYPES



The expendable tool is used for lower consumer cost or field installations.



The lever or plier style tools are used for experimental or field installations.



The pneumatic and battery tool is used for production line work.



Automation system can be used for installations

PUSH TO START - SINGLE ACTION INSTALLATION TOOLS

Single stage trigger for complete thread on and reverse thread off for faster insert installations.



AVK5500



AVK4705



AVK4878



SPP 3 Tool™ Data Master

ARO PNEUMATIC STALL TORQUE TOOL

The ARO pneumatic stall torque type tool installs AVK as follows...

1



1/4 turn the fastener onto the ARO tool mandrel and place the fastener into the hole.

2



Depress the top trigger until the tool stalls and the AVK fastener is collapsed.

3



Depress the lower trigger and the tool unthreads from the installed part.

AVK SPP TOOL™ SYSTEM - SPIN PULL TO PRESSURE

The SPP Tool™ utilizes an ARO pneumatic stall torque tool and incorporates an integrated hydraulic cylinder powered by a remote hydraulic power pack system.

1



1/4 turn the fastener onto the SPP Tool™ mandrel and place the fastener into the hole.

2



Depress the tool trigger and the tool spins into the fastener and automatically exerts a pressure controlled pull installing the fastener.

3



Depress the tool reverse trigger and the tool spins out of the installed fastener.

AUTOMATION



Automation benefits are as follows:

- Labor savings
- Single or multi-simultaneous insert installation
- Maximum up-time providing optimal production output
- Multiple work station configurations are available
- Robotic arm with hole locating vision system is available
- Insert collapse load can be verified

See pages 31- 43 for installation tooling.


ADVANTAGES OF ASSEMBLY WITH AVK




Here are a few reasons why the use of AVK's blind installed fasteners are **"Improving The Way We Assemble The World™"**

MATERIAL THICKNESS

Material thickness is being reduced to save weight, fuel, pollution and raw material cost. Fastening to thin materials is simple and reliable with AVK. AVK fasteners can be installed into thinner materials with greater ease than can be accomplished with weld nuts, pierce nuts, clinch nuts, thread tapping and thread forming screws.

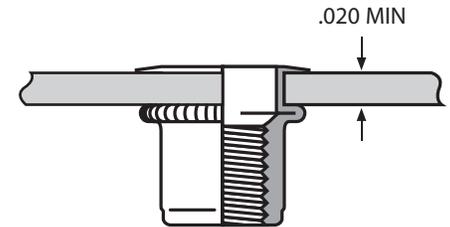

*Minimum grips vary per thread size

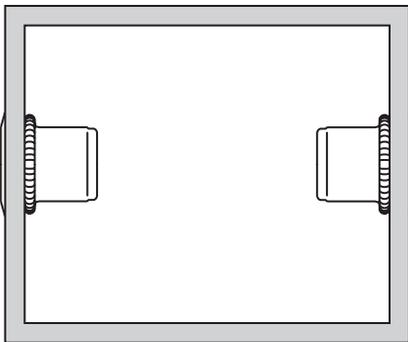


INSTALLS BLIND

New material structures such as hydro formed tubing, aluminum extrusions and composite panels are being specified due to their strength to weight ratios. These materials form blind applications and are ideal for AVK fasteners versus other types of fasteners.

NEAT AND CLEAN

Welding and the attachment of weld fasteners are being replaced with AVK due to health and clean air requirements for workers. The alternatives are expensive capital equipment vacuuming and air scrubber equipment. Weld fasteners also burn away pre-applied galvanized finishes requiring re-work to prevent corrosion. Pre-painted materials cannot be used with weld fasteners as the paint prevents weld nut attachment. Use of pre-painted materials can eliminate painting facility costs and environmental issues. Weld fasteners must be applied before a product is painted. Thread masking procedures are eliminated by the use of AVK as our products can be installed after paint.

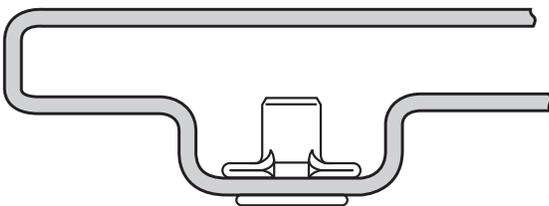

PLASTICS & COMPOSITES


Plastics and composites are being used for products to take advantage of their molding, corrosion resistance, coloring and strength to weight ratios. AVK has specific products for blow, rotational, compression, vacuum, scrimp, honeycomb, processed plastic and composites.

Products designed for consumer assembly to reduce in plant assembly costs use AVK to provide strong threads for the attachment of component parts using conventional hardware.




TYPICAL AVK APPLICATIONS

E-COAT/PAINTED SHEET METAL

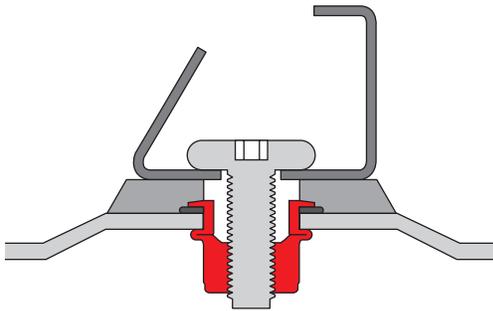


VEHICLE ROOF — LUGGAGE RACK RAIL

FORMED SHEET METAL

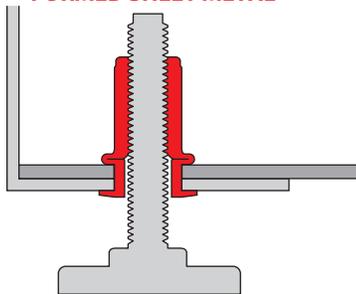


OFFICE FURNITURE — LEG LEVELING

BLOW OR ROTATIONAL MOLDED PLASTICS

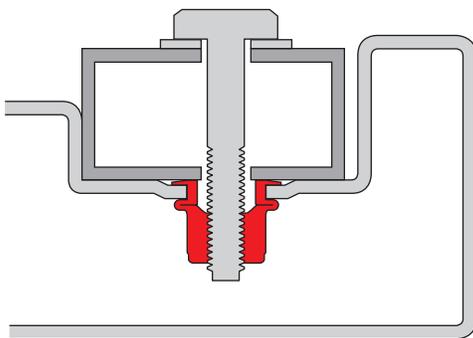


FARM EQUIPMENT — GUARD TO TUBULAR FRAME

HYDROFORMED STEEL TUBING

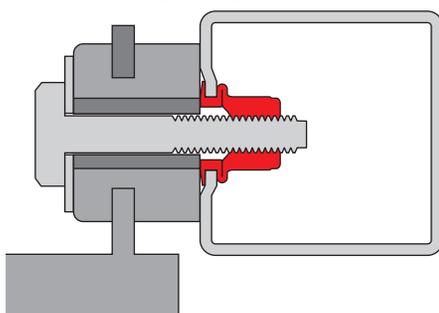

VEHICLE — RADIATOR ATTACHMENT

BLOW MOLDED PLASTIC

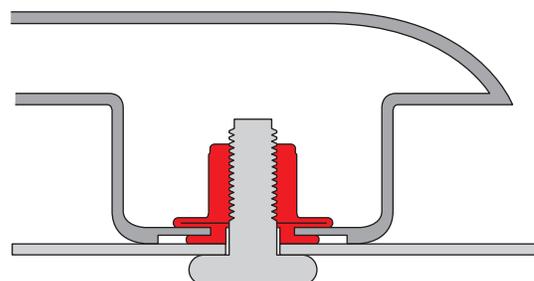

AUTOMOBILES — SPOILER TO TRUNK

- **SOLAR PANELS & SYSTEMS**
 Assembly of solar panel frame extrusions to solar panels • Telescoping tube assembly, and tracking sheet metal enclosures
- **MEDICAL EQUIPMENT**
 Wheelchair Hand Rims • Wheelchair Seats/ Backs
 • Handles/Casters to Carts • Components to Hospital Beds • Aluminum Walker Assembly
- **MILITARY GROUND SUPPORT**
 Ducts/Wireways to Shelters • Electronics to Shelters • Missile Container Assembly
 • Antenna Assembly • Hardware to Shelters
- **MILITARY VEHICLES**
 Side Mirrors to Body • Armor to Body
 • Bulletproof Glass to Body • Instruments to Dash • Cargo Hold Down to Floor Pan
- **OFFICE FURNITURE**
 Modular Unit Stacking • Hardware/Hinges to Unit • Leg Leveling • Knock-Down Assembly • Partition Electrical Components
- **RECREATION**
 Playground Equipment Assembly • Bicycle Frame Water Bottle Attachment • Basketball Pole Assembly • Golf Cart Roof Supports to Body • Consumer Assembly of Toys
- **REFRIGERATION**
 Hinges to Doors/Cabinet • Handles to Doors
 • Shelf Brackets to Wall • Compressor to Base Pan • Leg Leveling
- **RV INDUSTRY**
 Instruments to Boat Dash • Bow Rails to Deck • Components to Snowmobile • Components to Motorcycles • RV Awning Assembly
- **TRUCKS/TRAILERS**
 Mirrors/Lights to Cab • Grab Handles to Cab • Firewall Attachments • Instruments to Dash • Exhaust/Wind Deflectors



TYPICAL AVK APPLICATIONS

● **AEROSPACE**

Galley Equipment Casters to Frame • Aircraft Seating Footrests to Frame • Aircraft Seat Trays to Frame • Bulkhead Partition Mounting Brackets Shipping Container Hinges and Latches to Frame

● **APPLIANCES**

Refrigerator Hinge to Cabinet • Refrigerator Handle to Door • Leg Leveler • Components to Cabinet • Under the Counter Attachments

● **ARCHITECTURAL**

Vinyl Window Hardware to Frame • Aluminum Door Hardware to Frame • Threshold Sweeps to Frame • Aluminum Railing "T" Joints • Patio Enclosure Construction

● **AUTO/SPORT-UTILITY VEHICLES**

Luggage Racks to Roof • Spoilers to Trunk Lids • Option Controls to Dash Panel • Under Hood Option Items • Grab Handles • Air Bag Attachments

● **ELECTRONICS CABINERY**

Hardware to Cabinet • Hinges to Cabinet • Leg Levelers • Components to Frame • Lifting Anchors

● **EXERCISE EQUIPMENT**

Stationary Bike Floor Supports to Frame • Treadmill Controls to Frame • Sheet Metal Covers over Motors • Weightlifting Frame Assembly • Electronics to Unit

● **LAWN/GARDEN FARM IMPLEMENT**

Mirrors/Lights to Cab • Components to Decking • Guards to Framing • Seats to Framing • Access Panels to Frame


● **FURNITURE**

Aluminum Furniture Assembly • Leg Leveling • Brass Headboards to Frame • Patio Table Assembly • Tubular Bed Frame Assembly

● **HEATING/AIR CONDITIONING**


Compressors to Base Pans • Access Doors to Cabinet • Motors to Blower Housing • Blower Housing to Unit • Burner Assembly to Unit

ALUMINUM EXTRUSIONS

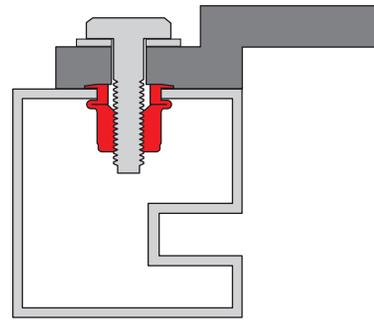


ENTRY DOORS — PUSH BARS TO DOOR FRAME

POWDER COATED STEEL TUBE

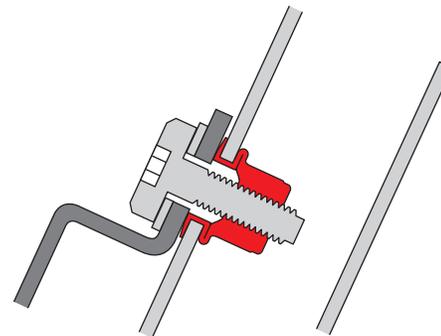


BICYCLE FRAME — WATER BOTTLE BRACKET

PREPAINTED FOAM CORE SHEET METAL

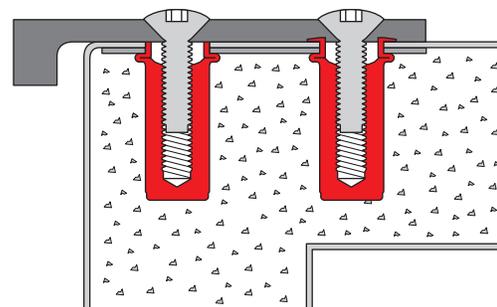


REFRIGERATION EQUIPMENT — HINGES TO CABINET

E-COAT/PAINTED SHEET METAL

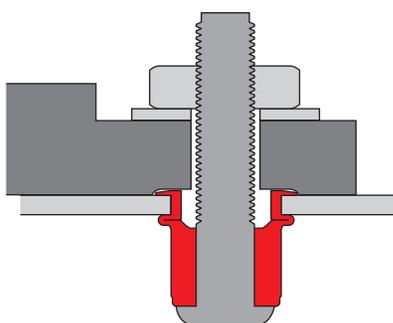

VEHICLE DASH PANEL — ABS MODULE MOUNTING

GALVANIZED SHEET METAL

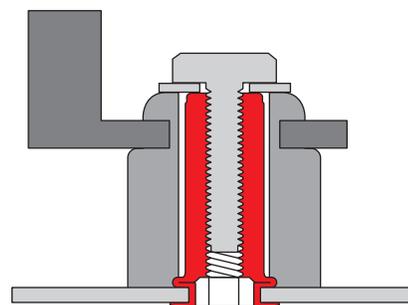

AIR CONDITIONER BASE PAN — COMPRESSOR MOUNTING



A-L SERIES INSERT PROFILE

The **A-L Series Insert** features a knurled body and large diameter—low profile head making it ideal for use in punched or drilled holes. The Steel A-L Series Insert offers the highest all around strength characteristics and has been designed to be used with Grade 5 or Metric 8.8/9.8 mating screws. The A-L Series is AVK's most versatile performer.


The A-L Series Insert can be installed using AVK's ARO brand pneumatic tools or AVK's SPP Tool™ System pneumatic/hydraulic tooling. These tools can be located at any position on your assembly line. The A-L Series can be installed either before or after finish.



As the A-L Series is installed, the knurled body expands 360° **FILLING THE HOLE**. This feature provides exceptional torque strength and vibration resistance.

SPINWALL TECHNOLOGY™

HOW HOLE FILL WORKS FOR YOU

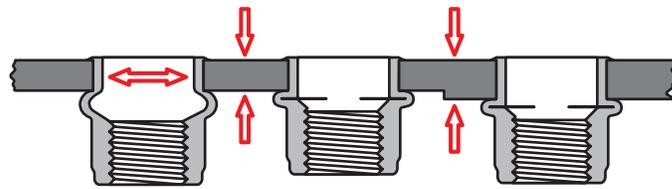

The installation tool then continues to install the insert forming a backside flange even in multiple or variable thickness materials **WITHOUT ADJUSTMENT**.

DESIGN BENEFITS

- **EXCEPTIONAL TORQUE STRENGTH** is achieved as the insert's knurled body expands **FILLING THE HOLE**.
- **QUALITY INSTALLATIONS** even in variable thickness materials are assured by AVK's spin/spin ARO pneumatic tools and our pneumatic hydraulic SPP Tool™ Systems.
- **SUPERIOR THREAD STRENGTH** is provided due to our internal rolled thread manufacturing process.
- **THREADS GAUGE** before and after installation due to the increased cross-sectional thickness of the thread area. Thread dilation is prevented.
- **INVENTORY REDUCTION** is possible because of the A-L Series' wide grip range capacity. It is 2.5 times greater than conventional rivet nuts.
- **SUPERIOR CORROSION RESISTANCE** is provided by our standard zinc/yellow trivalent finish (120 hours. salt spray to white corrosion). For exceptional corrosion protection we offer a trivalent tin/zinc alloy finish.
- **AVAILABLE** in steel. Additional materials such as aluminum, brass and monel are available by special order.

ADDITIONAL DESIGN TYPES

ORIGINAL CLOSED END

Thread area is enclosed eliminating leakage past the threads from either side of the application. See page 11.



LIGHT CLOSED END

Offers the same benefits as the original with 5-30% weight savings



SEALED HEAD

A PVC foam seal is bonded to the underside of the head and when installed provides a weather tight seal. (Also available in the closed end version.) See page 18 for important grip information.



WEDGE HEAD

The addition of wedges under the head provides even greater torque capability, especially in soft or thin materials and is excellent for electrical grounding applications. Contact us for details.







INSERT
KNURLED THREADED INSERTS

UNIFIED (INCH) AND METRIC THREAD SIZES

OPEN END TYPE

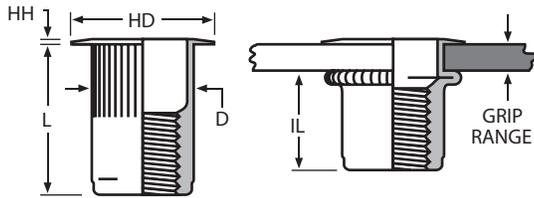

CLOSED END TYPE

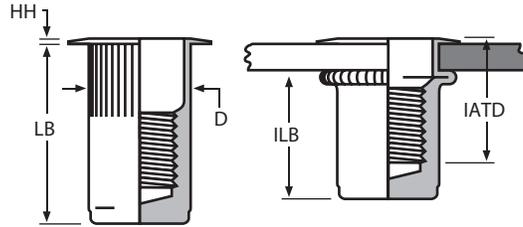

Thread Specifications: Unified 2B/21 per ASME B1.1
Metric 6H/21 per ASME B1.13M

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | HOLE SIZE +.006 / -.000 | HD ±.010 ±.025* | HH ±.003 | L ±.015 | D MAX. | IL MAX. | LB MAX. | ILB MAX. | IATD** MAX. |
|-------------|-----------------|-------------|---------------|-------------------------|-----------------|----------|---------|--------|---------|---------|----------|-------------|
| 6-32 UNC | 632 | .020 - .080 | 80 | 17/64 (.2656) | .390 | .030 | .420 | .265 | .305 | .755 | .640 | .610 |
| 6-32 UNC | 632 | .080 - .130 | 130 | 17/64 (.2656) | .390 | .030 | .470 | .265 | .305 | .755 | .580 | .670 |
| 8-32 UNC | 832 | .020 - .080 | 80 | 17/64 (.2656) | .390 | .030 | .420 | .265 | .305 | .755 | .640 | .610 |
| 8-32 UNC | 832 | .080 - .130 | 130 | 17/64 (.2656) | .390 | .030 | .470 | .265 | .305 | .755 | .580 | .670 |
| 10-24 UNC | 1024 | .020 - .130 | 130 | 19/64 (.2969) | .415 | .030 | .475 | .296 | .315 | 1.005 | .845 | .730 |
| 10-24 UNC | 1024 | .130 - .225 | 225 | 19/64 (.2969) | .415 | .030 | .585 | .296 | .315 | 1.005 | .735 | .840 |
| 10-32 UNF | 1032 | .020 - .130 | 130 | 19/64 (.2969) | .415 | .030 | .475 | .296 | .315 | 1.005 | .845 | .730 |
| 10-32 UNF | 1032 | .130 - .225 | 225 | 19/64 (.2969) | .415 | .030 | .585 | .296 | .315 | 1.005 | .735 | .840 |
| 1/4-20 UNC | 420 | .027 - .165 | 165 | 25/64 (.3906) | .500 | .030 | .580 | .390 | .380 | 1.205 | 1.005 | .895 |
| 1/4-20 UNC | 420 | .165 - .260 | 260 | 25/64 (.3906) | .500 | .030 | .680 | .390 | .380 | 1.205 | .905 | 1.035 |
| 5/16-18 UNC | 518 | .027 - .150 | 150 | 17/32 (.5312) | .685* | .035 | .690 | .530 | .470 | 1.405 | 1.175 | .995 |
| 5/16-18 UNC | 518 | .150 - .312 | 312 | 17/32 (.5312) | .685* | .035 | .805 | .530 | .425 | 1.405 | 1.025 | 1.120 |
| 3/8-16 UNC | 616 | .027 - .150 | 150 | 17/32 (.5312) | .685* | .035 | .690 | .530 | .470 | 1.405 | 1.175 | .995 |
| 3/8-16 UNC | 616 | .150 - .312 | 312 | 17/32 (.5312) | .685* | .035 | .805 | .530 | .425 | 1.405 | 1.025 | 1.120 |
| 1/2-13 UNC | 813 | .063 - .200 | 200 | 11/16 (.6875) | .865* | .047 | 1.150 | .685 | .850 | 2.380 | 2.070 | 1.505 |
| 1/2-13 UNC | 813 | .200 - .350 | 350 | 11/16 (.6875) | .865* | .047 | 1.300 | .685 | .850 | 2.380 | 1.920 | 1.505 |
| 1/2-13 UNC | 813 | .350 - .500 | 500 | 11/16 (.6875) | .865* | .047 | 1.450 | .685 | .860 | 2.380 | 1.770 | 1.505 |

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | HOLE SIZE +.015 / -.000 | HD ±.025 ±.064* | HH ±.008 | L ±.038 | D MAX. | IL MAX. | LB MAX. | ILB MAX. | IATD** MAX. |
|----------------|-----------------|-------------|---------------|-------------------------|-----------------|----------|---------|--------|---------|---------|----------|-------------|
| M4 x 0,7 ISO | 470 | 0,50 - 2,00 | 2.0 | 6,75 | 9,91 | 0,76 | 10,67 | 6,73 | 7,75 | 19,18 | 16,26 | 15,49 |
| M4 x 0,7 ISO | 470 | 2,00 - 3,30 | 3.3 | 6,75 | 9,91 | 0,76 | 11,94 | 6,73 | 7,75 | 19,18 | 14,73 | 17,02 |
| M5 x 0,8 ISO | 580 | 0,50 - 3,30 | 3.3 | 7,60 | 10,54 | 0,76 | 12,07 | 7,52 | 8,00 | 25,53 | 21,46 | 18,54 |
| M5 x 0,8 ISO | 580 | 3,30 - 5,70 | 5.7 | 7,60 | 10,54 | 0,76 | 14,86 | 7,52 | 8,00 | 25,53 | 18,67 | 21,34 |
| M6 x 1,0 ISO | 610 | 0,70 - 4,20 | 4.2 | 10,00 | 12,70 | 0,76 | 14,73 | 9,91 | 9,65 | 30,61 | 25,53 | 22,73 |
| M6 x 1,0 ISO | 610 | 4,20 - 6,60 | 6.6 | 10,00 | 12,70 | 0,76 | 17,27 | 9,91 | 9,65 | 30,61 | 22,99 | 26,29 |
| M8 x 1,25 ISO | 8125 | 0,70 - 3,80 | 3.8 | 13,50 | 17,40* | 0,89 | 17,53 | 13,46 | 11,94 | 35,69 | 29,85 | 25,27 |
| M8 x 1,25 ISO | 8125 | 3,80 - 7,90 | 7.9 | 13,50 | 17,40* | 0,89 | 20,45 | 13,46 | 10,80 | 35,69 | 26,04 | 28,45 |
| M10 x 1,5 ISO | 1015 | 0,70 - 3,80 | 3.8 | 13,50 | 17,40* | 0,89 | 17,53 | 13,46 | 11,94 | 35,69 | 29,85 | 25,27 |
| M10 x 1,5 ISO | 1015 | 3,80 - 7,90 | 7.9 | 13,50 | 17,40* | 0,89 | 20,45 | 13,46 | 10,80 | 35,69 | 26,04 | 28,45 |
| M12 x 1,75 ISO | 12175 | 1,60 - 5,10 | 5.1 | 17,45 | 21,97* | 1,19 | 29,21 | 17,4 | 21,59 | 60,45 | 52,58 | 38,23 |
| M12 x 1,75 ISO | 12175 | 5,10 - 8,90 | 8.9 | 17,45 | 21,97* | 1,19 | 33,02 | 17,4 | 21,59 | 60,45 | 48,77 | 38,23 |
| M12 x 1,75 ISO | 12175 | 8,90 - 12,7 | 12.7 | 17,45 | 21,97* | 1,19 | 36,83 | 17,4 | 21,84 | 60,45 | 44,96 | 38,23 |

NOTE 1: Grip range can be affected by parent material density and actual hole size. AVK suggests trial installations to determine optimum grip.

NOTE 2: Additional UNF fine threads are available. Contact us for details.

NOTE 3: Additional grip lengths are available. Contact us for details. **Dimensions in minimum grip condition.

***NOTE 4: Closed End CRES inserts have a reduced "LB" and "ILB" dimension. Contact us for details.

PART NUMBERING SYSTEM



SAMPLE NUMBER: ALS3T-420-165

| AL | () | () | -() | -() | () |
|----------------|-----------------|-----------------------|-----------------|---------------|-------|
| PRODUCT SERIES | MATERIAL | FINISH RoHS COMPLIANT | THREAD CALL OUT | GRIP CALL OUT | TYPE |
| S | Steel 1010/1008 | 3T | | | BLANK |
| A | Aluminum 5056 | 4T | | | B |
| B | Brass 270/260 | 9T | | | S |
| M | Monel 400 | | | | W |
| C | CRES 302*** | | | | |

See installation tool selection on page 31 - 43.



A-K SERIES INSERT PROFILE

The **A-K Series** Insert features a knurled body and a reduced profile head to allow for virtually flush installation. Countersink drilling or dimpling of the parent material can be eliminated. The Steel A-K Series is designed to be used with Grade 5 or Metric Class 8.8/9.8 mating screws.


The A-K Series Insert can be installed using AVK's ARO brand pneumatic tools or AVK's SPPTM pneumatic/hydraulic tooling. These tools can be located at any position on your assembly line. The A-K Series Insert can be installed either before or after finish.



SPINWALL TECHNOLOGYTM

HOW HOLE FILL WORKS FOR YOU

As the A-K Series is installed, the knurled body expands 360° **FILLING THE HOLE**. This feature provides exceptional torque strength and vibration resistance.

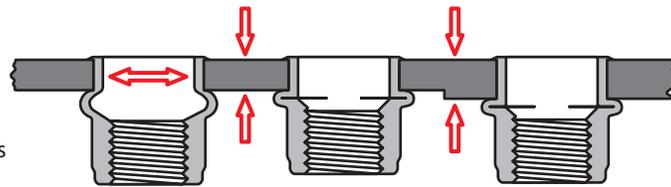

The installation tool then continues to install the insert forming a backside flange even in multiple or variable thickness materials **WITHOUT ADJUSTMENT**.

DESIGN BENEFITS

- **VIRTUALLY FLUSH INSTALLATIONS** are achieved without special hole preparation due to the A-K Series minimal head profile.
- **EXCEPTIONAL TORQUE STRENGTH** is achieved as the insert's knurled body expands **FILLING THE HOLE**.
- **QUALITY INSTALLATIONS** even in variable thickness materials are assured by AVK's spin/spin ARO pneumatic tools and our pneumatic/hydraulic SPP ToolTM Systems.
- **SUPERIOR THREAD STRENGTH** is provided due to our internal rolled thread manufacturing process.
- **THREADS GAUGE** before and after installation due to the increased cross-sectional thickness of the thread area. Thread dilation is prevented.
- **INVENTORY REDUCTION** is possible because of the A-K Series' wide grip range capacity. It is 2.5 times greater than conventional rivet nuts.
- **SUPERIOR CORROSION RESISTANCE** is provided by our standard zinc/yellow trivalent finish (120 hours. Salt spray to white corrosion). For exceptional corrosion protection we offer a trivalent tin/zinc alloy finish.
- **AVAILABLE** in steel. Additional materials such as aluminum, brass and monel are available by special order. Contact us for details.

ADDITIONAL DESIGN TYPES

ORIGINAL CLOSED END

Thread area is enclosed eliminating leakage past the threads from either side of the application. See page 13.



LIGHT CLOSED END


Offers the same benefits as the original with a 5 – 30% weight savings.




UNIFIED (INCH) AND METRIC THREAD SIZES



OPEN END TYPE

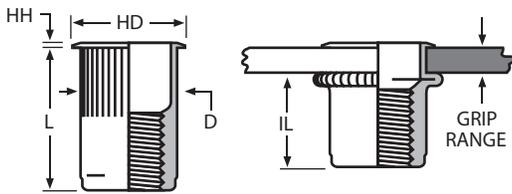

CLOSED END TYPE

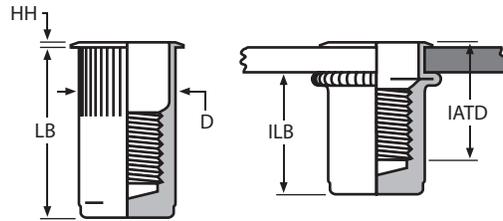

Thread Specifications: Unified 2B/21 per ASME B1.1
Metric 6H/21 per ASME B1.13M

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | HOLE SIZE +.006 / -.000 | HD ±.015 | HH ±.003 | L ±.015 | D MAX. | IL MAX. | LB MAX. | ILB MAX. | IATD* MAX. |
|-------------|-----------------|-------------|---------------|-------------------------|----------|----------|---------|--------|---------|---------|----------|------------|
| 6-32 UNC | 632 | .020 - .080 | 80 | 17/64 (.2656) | .310 | .019 | .420 | .265 | .305 | .755 | .640 | .610 |
| 6-32 UNC | 632 | .080 - .130 | 130 | 17/64 (.2656) | .310 | .019 | .470 | .265 | .305 | .755 | .580 | .670 |
| 8-32 UNC | 832 | .020 - .080 | 80 | 17/64 (.2656) | .310 | .019 | .420 | .265 | .305 | .755 | .640 | .610 |
| 8-32 UNC | 832 | .080 - .130 | 130 | 17/64 (.2656) | .310 | .019 | .470 | .265 | .305 | .755 | .580 | .670 |
| 10-24 UNC | 1024 | .020 - .130 | 130 | 19/64 (.2969) | .340 | .019 | .475 | .296 | .315 | 1.005 | .845 | .730 |
| 10-24 UNC | 1024 | .130 - .225 | 225 | 19/64 (.2969) | .340 | .019 | .585 | .296 | .315 | 1.005 | .735 | .840 |
| 10-32 UNF | 1032 | .020 - .130 | 130 | 19/64 (.2969) | .340 | .019 | .475 | .296 | .315 | 1.005 | .845 | .730 |
| 10-32 UNF | 1032 | .130 - .225 | 225 | 19/64 (.2969) | .340 | .019 | .585 | .296 | .315 | 1.005 | .735 | .840 |
| 1/4-20 UNC | 420 | .027 - .165 | 165 | 25/64 (.3906) | .455 | .023 | .580 | .390 | .380 | 1.205 | 1.005 | .895 |
| 1/4-20 UNC | 420 | .165 - .260 | 260 | 25/64 (.3906) | .455 | .023 | .680 | .390 | .380 | 1.205 | .905 | 1.035 |
| 5/16-18 UNC | 518 | .027 - .150 | 150 | 17/32 (.5312) | .595 | .023 | .690 | .530 | .470 | 1.405 | 1.175 | .995 |
| 5/16-18 UNC | 518 | .150 - .312 | 312 | 17/32 (.5312) | .595 | .023 | .805 | .530 | .425 | 1.405 | 1.025 | 1.120 |
| 3/8-16 UNC | 616 | .027 - .150 | 150 | 17/32 (.5312) | .595 | .023 | .690 | .530 | .470 | 1.405 | 1.175 | .995 |
| 3/8-16 UNC | 616 | .150 - .312 | 312 | 17/32 (.5312) | .595 | .023 | .805 | .530 | .425 | 1.405 | 1.025 | 1.120 |

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | HOLE SIZE +.015 / -.000 | HD ±.038 | HH ±.008 | L ±.038 | D MAX. | IL MAX. | LB MAX. | ILB MAX. | IATD* MAX. |
|---------------|-----------------|-------------|---------------|-------------------------|----------|----------|---------|--------|---------|---------|----------|------------|
| M4 x 0,7 ISO | 470 | 0,50 - 2,00 | 2.0 | 6,75 | 7,87 | 0,48 | 10,67 | 6,73 | 7,75 | 19,18 | 16,26 | 15,49 |
| M4 x 0,7 ISO | 470 | 2,00 - 3,30 | 3.3 | 6,75 | 7,87 | 0,48 | 11,94 | 6,73 | 7,75 | 19,18 | 14,73 | 17,02 |
| M5 x 0,8 ISO | 580 | 0,50 - 3,30 | 3.3 | 7,60 | 8,64 | 0,48 | 12,07 | 7,52 | 8,00 | 25,53 | 21,46 | 18,54 |
| M5 x 0,8 ISO | 580 | 3,30 - 5,70 | 5.7 | 7,60 | 8,64 | 0,48 | 14,86 | 7,52 | 8,00 | 25,53 | 18,67 | 21,34 |
| M6 x 1,0 ISO | 610 | 0,70 - 4,20 | 4.2 | 10,00 | 11,56 | 0,58 | 14,73 | 9,91 | 9,65 | 30,61 | 25,53 | 22,73 |
| M6 x 1,0 ISO | 610 | 4,20 - 6,60 | 6.6 | 10,00 | 11,56 | 0,58 | 17,27 | 9,91 | 9,65 | 30,61 | 22,99 | 26,29 |
| M8 x 1,25 ISO | 8125 | 0,70 - 3,80 | 3.8 | 13,50 | 15,11 | 0,58 | 17,53 | 13,46 | 11,94 | 35,69 | 29,85 | 25,27 |
| M8 x 1,25 ISO | 8125 | 3,80 - 7,90 | 7.9 | 13,50 | 15,11 | 0,58 | 20,45 | 13,46 | 10,80 | 35,69 | 26,04 | 28,45 |
| M10 x 1,5 ISO | 1015 | 0,70 - 3,80 | 3.8 | 13,50 | 15,11 | 0,58 | 17,53 | 13,46 | 11,94 | 35,69 | 29,85 | 25,27 |
| M10 x 1,5 ISO | 1015 | 3,80 - 7,90 | 7.9 | 13,50 | 15,11 | 0,58 | 20,45 | 13,46 | 10,80 | 35,69 | 26,04 | 28,45 |

NOTE 1: Grip range can be affected by parent material density and actual hole size. AVK suggests trial installations to determine optimum grip.
NOTE 2: Additional UNF fine threads are available. Contact us for details.
NOTE 3: Additional grip lengths are available. Contact us for details. *Dimensions in minimum grip condition.
NOTE 4: Contact us regarding optional materials.

PART NUMBERING SYSTEM



SAMPLE NUMBER: AKS3T-420-165

| | | | | | |
|-----------------------|-------------------|---|------------------------|----------------------|-----------------|
| AK | () | () | -() | -() | () |
| PRODUCT SERIES | MATERIAL | FINISH ROHS COMPLIANT | THREAD CALL OUT | GRIP CALL OUT | TYPE |
| | CALL OUT | CALL OUT | | | CALL OUT |
| | GRADE | SPECIFICATION | | | TYPE |
| | S Steel 1010/1008 | 3T ZINC TRIVALENT PER ASTM-B-633, FE/ZN .0003 (8µ) WITH CLEAR PROTECTIVE COATING | | | BLANK Open End |
| | A Aluminum 5056 | 4T YELLOW ZINC TRIVALENT PER ASTM-B-633, FE/ZN .0003 (8µ) WITH CLEAR PROTECTIVE COATING | | | B Closed End |
| | B Brass 270/260 | 9T TIN ZINC TRIVALENT PER ESP-P-004, .0003 (8µ) WITH CLEAR PROTECTIVE COATING | | | |
| | M Monel 400 | Note: For Additional Plating See Chart on Page 47 | | | |

See installation tool selection on page 31 - 43.



A-H SERIES INSERT PROFILE

The **A-H Series Insert** features a radius corner hex body. When installed into a corresponding hex hole, the radius corners of the A-H Series Insert expand and fill the hole corners providing exceptional resistance to spinning in the panel. The Steel A-H Series is designed to be used with Grade 5 or Metric Class 8.8/9.8 mating screws.


The A-H Series Insert can be installed using AVK's ARO brand pneumatic tools or AVK's SPPTM pneumatic/hydraulic tooling systems. These tools can be located at any position on your assembly line. The A-H Series Insert can be installed either before or after finish.



SPINWALL TECHNOLOGYTM

HOW HOLE FILL WORKS FOR YOU

As the A-H Series is installed, the radius cornered hex body expands **FILLING THE HOLE**. This feature provides exceptional torque strength and vibration resistance.

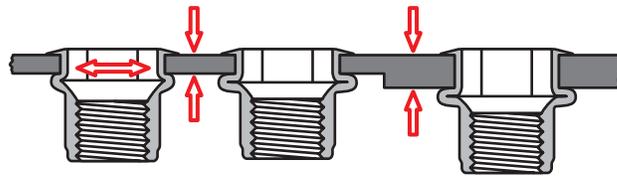

The installation tool then continues to install the insert forming a backside flange even in multiple or variable thickness materials **WITHOUT ADJUSTMENT**.

DESIGN BENEFITS

- **EXCEPTIONAL** resistance to spinning in the panel is achieved as the A-H Series' hex body expands **FILLING THE HOLE**.
- **AVOID STRESS FRACTURES** of your material and prolong punch and die life by specifying a radius corner in your hex hole. This is possible when using the A-H Series radius hex body insert.
- **QUALITY INSTALLATIONS** even in variable thickness materials are assured by AVK's spin/spin ARO pneumatic tools and our pneumatic/hydraulic SPP ToolTM Systems.
- **SUPERIOR THREAD STRENGTH** is provided due to our internal rolled thread manufacturing process.
- **THREADS GAUGE** before and after installation due to the increased cross-sectional thickness of the thread area. Thread dilation is prevented.
- **INVENTORY REDUCTION** is possible because of the A-H Series' wide grip range capacity. It is 2.5 times greater than conventional rivet nuts.
- **SUPERIOR CORROSION RESISTANCE** is provided by our standard zinc/yellow trivalent finish (120 hours. salt spray to white corrosion). For exceptional corrosion protection we offer a trivalent tin/zinc alloy finish.
- **AVAILABLE** in steel. Additional materials such as aluminum, brass and monel are available by special order.

ADDITIONAL DESIGN TYPES

ORIGINAL CLOSED END

Thread area is enclosed eliminating leakage past the threads from either side of the application. See page 15.



LIGHT CLOSED END

Offers the same benefits as the original with a 5-30% weight savings.



SEALED HEAD

A PVC foam seal is bonded to the underside of the head and when installed provides a weather tight seal. (Also available in the closed end version.) See page 19 for important grip information.




OPEN END

Stainless Steel Hex body insert available in specific thread ranges only. Please contact us for more information.





UNIFIED (INCH) AND METRIC THREAD SIZES

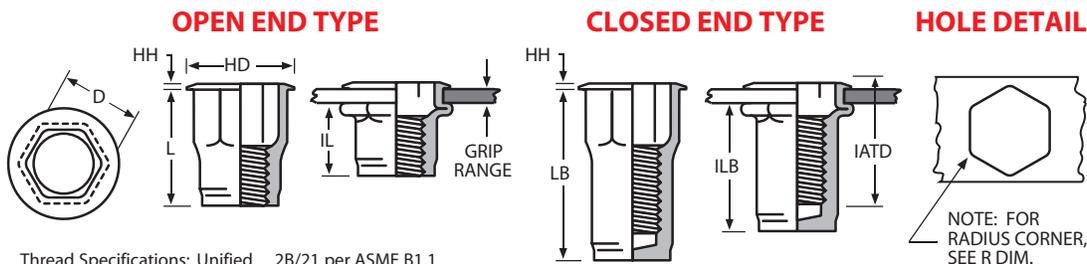

Thread Specifications: Unified 2B/21 per ASME B1.1
Metric 6H/21 per ASME B1.13M

NOTE: FOR RADIUS CORNER, SEE R DIM.

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | HOLE SIZE (ACROSS FLATS) +.004 / -.000 | HD ±.010 ±.025* | HH ±.003 | L ±.015 | D MAX. | IL MAX. | LB MAX. | ILB MAX. | IATD** MAX. | R MAX. |
|-------------|-----------------|-------------|---------------|--|-----------------|----------|---------|--------|---------|---------|----------|-------------|--------|
| 6-32 UNC | 632 | .020 - .080 | 80 | .250 | .375 | .027 | .385 | .249 | .295 | .755 | .640 | .575 | .015 |
| 6-32 UNC | 632 | .080 - .130 | 130 | .250 | .375 | .027 | .435 | .249 | .295 | .755 | .580 | .640 | .015 |
| 8-32 UNC | 832 | .020 - .080 | 80 | .250 | .375 | .027 | .385 | .249 | .295 | .755 | .640 | .575 | .015 |
| 8-32 UNC | 832 | .080 - .130 | 130 | .250 | .375 | .027 | .435 | .249 | .295 | .755 | .580 | .640 | .015 |
| 10-24 UNC | 1024 | .020 - .130 | 130 | .281 | .390 | .027 | .435 | .280 | .275 | 1.045 | .845 | .695 | .020 |
| 10-24 UNC | 1024 | .130 - .225 | 225 | .281 | .390 | .027 | .535 | .280 | .275 | 1.045 | .735 | .805 | .020 |
| 10-32 UNF | 1032 | .020 - .130 | 130 | .281 | .390 | .027 | .435 | .280 | .275 | 1.045 | .845 | .695 | .020 |
| 10-32 UNF | 1032 | .130 - .225 | 225 | .281 | .390 | .027 | .535 | .280 | .275 | 1.045 | .735 | .805 | .020 |
| 1/4-20 UNC | 420 | .027 - .165 | 165 | .375 | .510 | .030 | .585 | .374 | .400 | 1.205 | 1.015 | .945 | .040 |
| 1/4-20 UNC | 420 | .165 - .260 | 260 | .375 | .510 | .030 | .685 | .374 | .400 | 1.205 | .915 | 1.085 | .040 |
| 5/16-18 UNC | 518 | .027 - .150 | 150 | .500 | .655* | .035 | .685 | .499 | .530 | 1.460 | 1.235 | 1.045 | .040 |
| 5/16-18 UNC | 518 | .150 - .312 | 312 | .500 | .655* | .035 | .845 | .499 | .515 | 1.460 | 1.220 | 1.170 | .040 |
| 3/8-16 UNC | 616 | .027 - .150 | 150 | .500 | .655* | .035 | .685 | .499 | .530 | 1.460 | 1.235 | 1.045 | .040 |
| 3/8-16 UNC | 616 | .150 - .312 | 312 | .500 | .655* | .035 | .845 | .499 | .515 | 1.460 | 1.220 | 1.170 | .040 |
| 1/2-13 UNC | 813 | .063 - .200 | 200 | .687 | .865* | .047 | 1.150 | .686 | .850 | 2.380 | 2.070 | 1.505 | .040 |
| 1/2-13 UNC | 813 | .200 - .350 | 350 | .687 | .865* | .047 | 1.300 | .686 | .850 | 2.380 | 1.920 | 1.505 | .040 |
| 1/2-13 UNC | 813 | .350 - .500 | 500 | .687 | .865* | .047 | 1.450 | .686 | .860 | 2.380 | 1.770 | 1.505 | .040 |

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | HOLE SIZE (ACROSS FLATS) +0,10 / -0,00 | HD ±0,25 ±0,64* | HH ±0,08 | L ±0,38 | D MAX. | IL MAX. | LB MAX. | ILB MAX. | IATD** MAX. | R MAX. |
|----------------|-----------------|-------------|---------------|--|-----------------|----------|---------|--------|---------|---------|----------|-------------|--------|
| M4 x 0,7 ISO | 470 | 0,50 - 2,00 | 2,0 | 6,35 | 9,53 | 0,68 | 9,78 | 6,35 | 7,49 | 19,18 | 16,26 | 14,61 | 0,38 |
| M4 x 0,7 ISO | 470 | 2,00 - 3,30 | 3,3 | 6,35 | 9,53 | 0,68 | 11,05 | 6,35 | 7,49 | 19,18 | 14,73 | 16,26 | 0,38 |
| M5 x 0,8 ISO | 580 | 0,50 - 3,30 | 3,3 | 7,14 | 9,91 | 0,68 | 11,05 | 7,10 | 6,99 | 26,54 | 21,46 | 17,65 | 0,50 |
| M5 x 0,8 ISO | 580 | 3,30 - 5,70 | 5,7 | 7,14 | 9,91 | 0,68 | 13,59 | 7,10 | 6,99 | 26,54 | 18,67 | 20,45 | 0,50 |
| M6 x 1,0 ISO | 610 | 0,70 - 4,20 | 4,2 | 9,53 | 12,96 | 0,76 | 14,86 | 9,50 | 10,16 | 30,61 | 25,78 | 24,00 | 1,00 |
| M6 x 1,0 ISO | 610 | 4,20 - 6,60 | 6,6 | 9,53 | 12,96 | 0,76 | 17,40 | 9,50 | 10,16 | 30,61 | 23,24 | 27,56 | 1,00 |
| M8 x 1,25 ISO | 8125 | 0,70 - 3,80 | 3,8 | 12,70 | 16,64* | 0,89 | 17,40 | 12,70 | 13,46 | 37,08 | 31,37 | 26,54 | 1,00 |
| M8 x 1,25 ISO | 8125 | 3,80 - 7,90 | 7,9 | 12,70 | 16,64* | 0,89 | 21,46 | 12,70 | 13,08 | 37,08 | 30,99 | 29,72 | 1,00 |
| M10 x 1,5 ISO | 1015 | 0,70 - 3,80 | 3,8 | 12,70 | 16,64* | 0,89 | 17,40 | 12,70 | 13,46 | 37,08 | 31,37 | 26,54 | 1,00 |
| M10 x 1,5 ISO | 1015 | 3,80 - 7,90 | 7,9 | 12,70 | 16,64* | 0,89 | 21,46 | 12,70 | 13,08 | 37,08 | 30,99 | 29,72 | 1,00 |
| M12 x 1,75 ISO | 12175 | 1,60 - 5,10 | 5,1 | 17,45 | 21,97* | 1,19 | 29,21 | 17,42 | 21,59 | 60,45 | 52,58 | 38,23 | 1,00 |
| M12 x 1,75 ISO | 12175 | 5,10 - 8,90 | 8,9 | 17,45 | 21,97* | 1,19 | 33,02 | 17,42 | 21,59 | 60,45 | 48,77 | 38,23 | 1,00 |
| M12 x 1,75 ISO | 12175 | 8,90 - 12,7 | 12,7 | 17,45 | 21,97* | 1,19 | 36,83 | 17,42 | 21,84 | 60,45 | 44,96 | 38,23 | 1,00 |

NOTE 1: Grip range can be affected by parent material density and actual hole size. AVK suggests trial installations to determine optimum grip.
 NOTE 2: Additional UNF fine threads are available. Contact us for details.
 NOTE 3: Additional grip lengths are available in certain thread sizes. Contact us for details. **Dimensions in minimum grip condition.
 ***NOTE 4: Closed End CRES inserts have a reduced "LB" and "ILB" dimension. Contact us for details.

PART NUMBERING SYSTEM



SAMPLE NUMBER: AHS3T-420-165

| AH | () | () | -() | -() | () |
|----------------|-----------------|---|--|---------------|--------------------|
| PRODUCT SERIES | MATERIAL | FINISH RoHS COMPLIANT | THREAD CALL OUT | GRIP CALL OUT | TYPE |
| CALL OUT | GRADE | CALL OUT | SPECIFICATION | CALL OUT | TYPE |
| S | Steel 1010/1008 | 3T | ZINC TRIVALENT PER ASTM-B-633, FE/ZN .0003 (8µ) WITH CLEAR PROTECTIVE COATING | BLANK | Open End |
| A | Aluminum 5056 | 4T | YELLOW ZINC TRIVALENT PER ASTM-B-633, FE/ZN .0003 (8µ) WITH CLEAR PROTECTIVE COATING | B | Closed End |
| B | Brass 270/260 | 9T | TIN ZINC TRIVALENT PER ESP-P-004 .0003 (8µ) WITH CLEAR PROTECTIVE COATING | S | Sealed (See Pg.19) |
| M | Monel 400 | Note: For Additional Plating See Chart on Page 47 | | | |
| C | CRES 302*** | | | | |

See installation tool selection on page 31 - 43.



A-R SERIES INSERT PROFILE


The **A-R Series** threaded insert has been designed for use in plastics and thin gauge sheet metal applications where increased pull-out resistance is required.

The A-R Series features a PreSetTM slotted body design that when installed folds into four segments gripping the backside of the parent material. This design feature allows the A-R Series to be installed into single, variable or multiple thickness materials using AVK's ARO torque-stall pneumatic tools or AVK's pneumatic/hydraulic SPP ToolTM Systems.



A-R Series PreSetTM Design

How it works for you: The PreSet slightly expanded slotted body design of the A-R Series enables it to be installed using torque type tools.

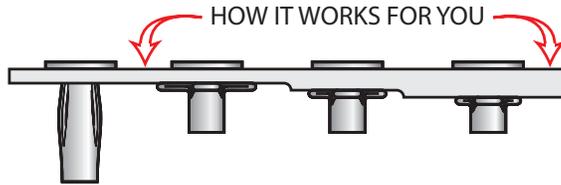

Hand or pneumatic torque tools will install the A-R Series in single, variable or multiple thickness.

DESIGN BENEFITS

- **INSTALLS USING TORQUE** stall type tooling due to the slightly expanded slotted body design. This is important when working with plastics that vary in thickness. No adjustment of the tool is necessary when installing the part into variable thickness materials.
- **INSTALLS USING HAND WRENCHED TORQUE** type tools. Ideal for use in kits and consumer installation applications.
- **PROVIDES EXCEPTIONAL** pull out resistance in soft plastics or thin sheet metal applications even if holes are hand drilled and oversized.
- **SUPERIOR CORROSION RESISTANCE** because all surfaces of the slotted body are plated. Standard plating is zinc/yellow trivalent finish (120 hours to white corrosion). For exceptional corrosion protection we offer a trivalent tin/zinc alloy finish.
- Superior thread strength due to AVK's internal roll threading process.
- **AVAILABLE IN STEEL.**

AIR TOOL SELECTION - SPP TOOLTM

The A-R Series has been designed to install with either the SPP ToolTM Systems or the ARO type tool. The SPP ToolTM Systems will install the A-R Series per the suggested grip ranges shown on page 17. See page 36 and 37 for SPP ToolTM Systems information.

AIR TOOL SELECTION - ARO TOOL

The ARO pneumatic tool shown on page 35 will install the A-R Series threaded insert. It will affect the published grip range of the part based on the tools' RPM and the density of the parent material. See the chart on page 17 for grip range information. AVK suggests trial installations in the actual application before specifying the optimum ARO tool.

ADDITIONAL DESIGN TYPES

A-R STUDS

An A-R blind side, petaled footprint produces exceptional pull-out combined with a stud for component attachment. Contact us for availability.



SPECIAL HEAD DESIGNS

Special head configurations such as square or wedge head can increase the inserts holding resistance in the parent material. Contact us for availability.




STRAIGHT BODY DESIGN

A straight body A-R Series insert is ideal for thin sheet metals, tubing & plastic applications where high pull-out is required. Contact us for availability.



UNIFIED (INCH) AND METRIC THREAD SIZES

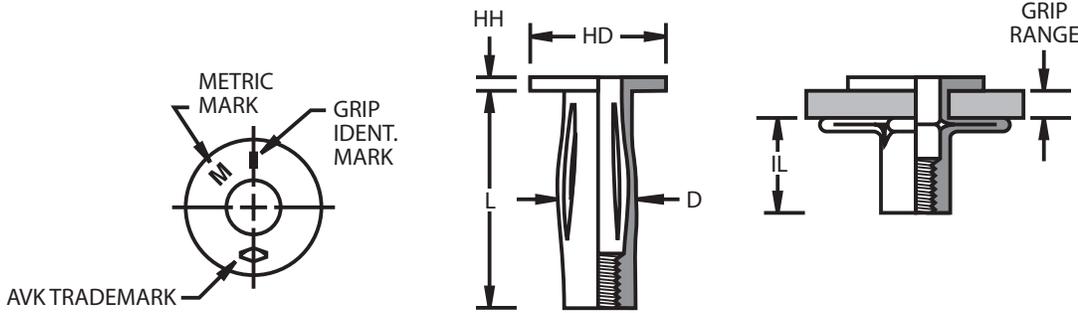

Thread Specifications: Unified 2B/21 per ASME B1.1
Metric 6H/21 per ASME B1.13M

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | HOLE SIZE | HD | HH | L | D MAX. | IL MAX. | GRIP ID MARK |
|-------------|-----------------|-------------|---------------|--------------|--------------|--------------|----------------|--------|---------|--------------|
| 1/4-20 UNC | 420 | .020 - .280 | .280 | .396 .390 | .645 .610 | .063 .053 | 1.015 .985 | .382 | .520 | Blank |
| 1/4-20 UNC | 420 | .280 - .500 | .500 | .396 .390 | .645 .610 | .063 .053 | 1.249 1.219 | .382 | .520 | 1 Rad |
| 5/16-18 UNC | 518 | .020 - .280 | .280 | .506 .500 | .770 .740 | .067 .057 | 1.156 1.126 | .495 | .775 | Blank |
| 5/16-18 UNC | 518 | .280 - .500 | .500 | .506 .500 | .770 .740 | .067 .057 | 1.390 1.360 | .495 | .775 | 1 Rad |
| 3/8-16 UNC | 616 | .020 - .280 | .280 | .600 .594 | .895 .865 | .093 .083 | 1.233 1.205 | .587 | .775 | Blank |
| 3/8-16 UNC | 616 | .280 - .500 | .500 | .600 .594 | .895 .865 | .093 .083 | 1.452 1.422 | .587 | .775 | 1Rad |

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | HOLE SIZE | HD | HH | L | D MAX. | IL MAX. | GRIP ID MARK |
|----------------|-----------------|------------|---------------|----------------|----------------|--------------|----------------|--------|---------|--------------|
| M6 x 1,0 ISO | 610 | 0,5 - 7,1 | 7.1 | 10,15 10,00 | 16,38 15,49 | 1,60 1,35 | 25,78 25,02 | 9,80 | 13,21 | Blank |
| M6 x 1,0 ISO | 610 | 7,1 - 12,7 | 12.7 | 10,15 10,00 | 16,38 15,49 | 1,60 1,35 | 31,72 30,96 | 9,80 | 13,21 | 1 Rad |
| M8 x 1,25 ISO | 8125 | 0,5 - 7,1 | 7.1 | 12,85 12,70 | 19,56 18,80 | 1,70 1,45 | 29,36 28,60 | 12,57 | 19,69 | Blank |
| M8 x 1,25 ISO | 8125 | 7,1 - 12,7 | 12.7 | 12,85 12,70 | 19,56 18,80 | 1,70 1,45 | 35,31 34,54 | 12,57 | 19,69 | 1 Rad |
| M10 x 1,5 ISO | 1015 | 0,5 - 7,1 | 7.1 | 15,24 15,09 | 22,73 21,97 | 2,36 2,11 | 31,32 30,61 | 14,91 | 19,69 | Blank |
| M10 x 1.50 ISO | 1015 | 7,1 - 12,7 | 12.7 | 15,24 15,09 | 22,73 21,97 | 2,36 2,11 | 36,88 36,10 | 14,91 | 19,69 | 1 Rad |


NOTE 1: Grip range stated in the dimensional chart above can be achieved using pull type installation tools and may be variable based on hole size and parent material density. AVK recommends trial installations to determine actual grip range in the application.

NOTE 2: Grip ranges will be less than stated above when using torque type installation tools. Grip range will be affected by the tool RPM speed, stall torque, hole size and parent material density. AVK recommends trial installations to determine actual grip. See page 34 for torque tool selection guidelines

PART NUMBERING SYSTEM



SAMPLE NUMBER: ARS3T-420-280

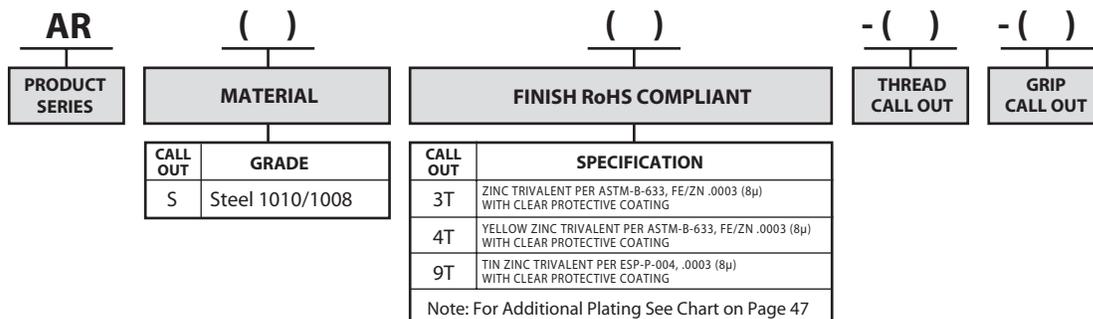


For air tool selection see pages 35 and 37




A-L SERIES SEALED HEAD INSERT PROFILE

The **A-L Series Sealed Head Insert** provides all the features of the standard A-L Series Insert plus the addition of a PVC foam seal that is bonded to the underside head of the insert. This feature provides a weather resistant seal that will withstand 50 PSI - 3.4 BARS of pressure.

OPEN END TYPE

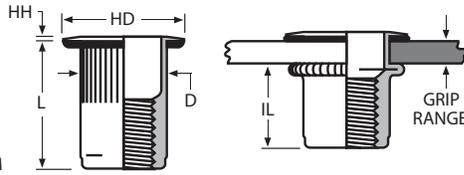

CLOSED END TYPE

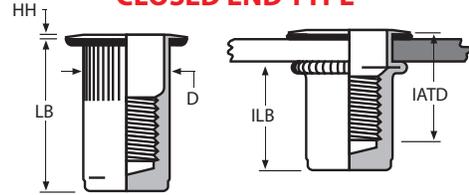

Thread Specifications:
 Unified 2B/21 per ASME B1.1
 Metric 6H/21 per ASME B1.13M

UNIFIED (INCH) AND METRIC THREAD SIZES

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | HOLE SIZE +.006 / -.000 | HD ±.010 ±.025* | HH ±.003 | L ±.015 | D MAX. | IL MAX. | LB MAX. | ILB MAX. | IATD** MAX. |
|-------------|-----------------|-------------|---------------|-------------------------|-----------------|----------|---------|--------|---------|---------|----------|-------------|
| 6-32 UNC | 632 | .020 - .060 | 80 | 17/64 (.2656) | .390 | .030 | .420 | .265 | .305 | .755 | .640 | .610 |
| 6-32 UNC | 632 | .060 - .100 | 130 | 17/64 (.2656) | .390 | .030 | .470 | .265 | .305 | .755 | .580 | .670 |
| 8-32 UNC | 832 | .020 - .060 | 80 | 17/64 (.2656) | .390 | .030 | .420 | .265 | .305 | .755 | .640 | .610 |
| 8-32 UNC | 832 | .060 - .100 | 130 | 17/64 (.2656) | .390 | .030 | .470 | .265 | .305 | .755 | .580 | .670 |
| 10-24 UNC | 1024 | .020 - .100 | 130 | 19/64 (.2969) | .415 | .030 | .475 | .296 | .315 | 1.005 | .845 | .730 |
| 10-24 UNC | 1024 | .100 - .175 | 225 | 19/64 (.2969) | .415 | .030 | .585 | .296 | .315 | 1.005 | .735 | .840 |
| 10-32 UNF | 1032 | .020 - .100 | 130 | 19/64 (.2969) | .415 | .030 | .475 | .296 | .315 | 1.005 | .845 | .730 |
| 10-32 UNF | 1032 | .100 - .175 | 225 | 19/64 (.2969) | .415 | .030 | .585 | .296 | .315 | 1.005 | .735 | .840 |
| 1/4-20 UNC | 420 | .027 - .125 | 165 | 25/64 (.3906) | .500 | .030 | .580 | .390 | .380 | 1.205 | 1.005 | .895 |
| 1/4-20 UNC | 420 | .125 - .195 | 260 | 25/64 (.3906) | .500 | .030 | .680 | .390 | .380 | 1.205 | .905 | 1.035 |
| 5/16-18 UNC | 518 | .027 - .115 | 150 | 17/32 (.5312) | .685* | .035 | .690 | .530 | .470 | 1.405 | 1.175 | .995 |
| 5/16-18 UNC | 518 | .130 - .250 | 312 | 17/32 (.5312) | .685* | .035 | .805 | .530 | .425 | 1.405 | 1.025 | 1.120 |
| 3/8-16 UNC | 616 | .027 - .115 | 150 | 17/32 (.5312) | .685* | .035 | .690 | .530 | .470 | 1.405 | 1.175 | .995 |
| 3/8-16 UNC | 616 | .130 - .250 | 312 | 17/32 (.5312) | .685* | .035 | .805 | .530 | .425 | 1.405 | 1.025 | 1.120 |
| 1/2-13 UNC | 813 | .063 - .150 | 200 | 11/16 (.6875) | .865* | .047 | 1.150 | .685 | .850 | 2.380 | 2.070 | 1.505 |
| 1/2-13 UNC | 813 | .150 - .280 | 350 | 11/16 (.6875) | .865* | .047 | 1.300 | .685 | .850 | 2.380 | 1.920 | 1.505 |
| 1/2-13 UNC | 813 | .280 - .400 | 500 | 11/16 (.6875) | .865* | .047 | 1.450 | .685 | .860 | 2.380 | 1.770 | 1.505 |

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | HOLE SIZE +.015 / -.000 | HD ±.025 ±.064* | HH ±.008 | L ±.038 | D MAX. | IL MAX. | LB MAX. | ILB MAX. | IATD** MAX. |
|----------------|-----------------|--------------|---------------|-------------------------|-----------------|----------|---------|--------|---------|---------|----------|-------------|
| M4 x 0,7 ISO | 470 | 0,50 - 1,52 | 2.0 | 6,75 | 9,91 | 0,76 | 10,67 | 6,73 | 7,75 | 19,18 | 16,26 | 15,49 |
| M4 x 0,7 ISO | 470 | 1,52 - 2,54 | 3.3 | 6,75 | 9,91 | 0,76 | 11,94 | 6,73 | 7,75 | 19,18 | 14,73 | 17,02 |
| M5 x 0,8 ISO | 580 | 0,50 - 2,54 | 3.3 | 7,60 | 10,54 | 0,76 | 12,07 | 7,52 | 8,00 | 25,53 | 21,46 | 18,54 |
| M5 x 0,8 ISO | 580 | 2,54 - 4,45 | 5.7 | 7,60 | 10,54 | 0,76 | 14,86 | 7,52 | 8,00 | 25,53 | 18,67 | 21,34 |
| M6 x 1,0 ISO | 610 | 0,70 - 3,17 | 4.2 | 10,00 | 12,70 | 0,76 | 14,73 | 9,91 | 9,65 | 30,61 | 25,53 | 22,73 |
| M6 x 1,0 ISO | 610 | 3,17 - 4,95 | 6.6 | 10,00 | 12,70 | 0,76 | 17,27 | 9,91 | 9,65 | 30,61 | 22,99 | 26,29 |
| M8 x 1,25 ISO | 8125 | 0,70 - 2,92 | 3.8 | 13,50 | 17,40* | 0,89 | 17,53 | 13,46 | 11,94 | 35,69 | 29,85 | 25,27 |
| M8 x 1,25 ISO | 8125 | 3,30 - 6,35 | 7.9 | 13,50 | 17,40* | 0,89 | 20,45 | 13,46 | 10,80 | 35,69 | 26,04 | 28,45 |
| M10 x 1,5 ISO | 1015 | 0,70 - 2,92 | 3.8 | 13,50 | 17,40* | 0,89 | 17,53 | 13,46 | 11,94 | 35,69 | 29,85 | 25,27 |
| M10 x 1,5 ISO | 1015 | 3,30 - 6,35 | 7.9 | 13,50 | 17,40* | 0,89 | 20,45 | 13,46 | 10,80 | 35,69 | 26,04 | 28,45 |
| M12 x 1,75 ISO | 12175 | 1,60 - 3,81 | 5.1 | 17,45 | 21,97* | 1,19 | 29,21 | 17,4 | 21,59 | 60,45 | 52,58 | 38,23 |
| M12 x 1,75 ISO | 12175 | 3,81 - 7,11 | 8.9 | 17,45 | 21,97* | 1,19 | 33,02 | 17,4 | 21,59 | 60,45 | 48,77 | 38,23 |
| M12 x 1,75 ISO | 12175 | 7,11 - 10,16 | 12.7 | 17,45 | 21,97* | 1,19 | 36,83 | 17,4 | 21,84 | 60,45 | 44,96 | 38,23 |

NOTE 1: Grip range can be affected by parent material density and actual hole size. AVK suggests trial installations to determine optimum grip.
 NOTE 2: Additional UNF fine threads are available. Contact us for details.
 NOTE 3: The A-L Series shown on this page incorporates an under head seal which reduces the standard grip range of the part based on the seal thickness. The grip call out remains based on the standard part for part numbering simplicity.
 NOTE 4: The PVC foam seal is not recommended for use with petroleum based liquids. **Dimensions in minimum grip condition.
 ***NOTE 5: Closed End CRES inserts have a reduced "LB" and "ILB" dimension. Contact us for details.

PART NUMBERING SYSTEM



SAMPLE NUMBER: ALS3T-420-165S

| AL | () | () | -() | -() | () | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------|--|------------------------------|------------------------|----------------------|-----------------|---|---------------|---|---------------|---|-----------|---|-------------|--|----------|---------------|----|---|----|--|----|--|--|--|---|----------|------|-------|----------|---|------------|---|--------|---|------------|
| PRODUCT SERIES | MATERIAL | FINISH RoHS COMPLIANT | THREAD CALL OUT | GRIP CALL OUT | TYPE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <tr><th>CALL OUT</th><th>GRADE</th></tr> <tr><td>S</td><td>Steel 1010/1008</td></tr> <tr><td>A</td><td>Aluminum 5056</td></tr> <tr><td>B</td><td>Brass 270/260</td></tr> <tr><td>M</td><td>Monel 400</td></tr> <tr><td>C</td><td>CRES 302***</td></tr> </table> | CALL OUT | GRADE | S | Steel 1010/1008 | A | Aluminum 5056 | B | Brass 270/260 | M | Monel 400 | C | CRES 302*** | <table border="1"> <tr><th>CALL OUT</th><th>SPECIFICATION</th></tr> <tr><td>3T</td><td>ZINC TRIVALENT PER ASTM-B-633, FE/ZN .0003 (8µ) WITH CLEAR PROTECTIVE COATING</td></tr> <tr><td>4T</td><td>YELLOW ZINC TRIVALENT PER ASTM-B-633, FE/ZN .0003 (8µ) WITH CLEAR PROTECTIVE COATING</td></tr> <tr><td>9T</td><td>TIN ZINC TRIVALENT PER ESP-P-004, .0003 (8µ) WITH CLEAR PROTECTIVE COATING</td></tr> </table> <p>Note: For Additional Plating See Chart on Page 47</p> | CALL OUT | SPECIFICATION | 3T | ZINC TRIVALENT PER ASTM-B-633, FE/ZN .0003 (8µ) WITH CLEAR PROTECTIVE COATING | 4T | YELLOW ZINC TRIVALENT PER ASTM-B-633, FE/ZN .0003 (8µ) WITH CLEAR PROTECTIVE COATING | 9T | TIN ZINC TRIVALENT PER ESP-P-004, .0003 (8µ) WITH CLEAR PROTECTIVE COATING | | | <table border="1"> <tr><th>CALL OUT</th><th>TYPE</th></tr> <tr><td>BLANK</td><td>Open End</td></tr> <tr><td>B</td><td>Closed End</td></tr> <tr><td>S</td><td>Sealed</td></tr> <tr><td>W</td><td>Wedge Head</td></tr> </table> | CALL OUT | TYPE | BLANK | Open End | B | Closed End | S | Sealed | W | Wedge Head |
| CALL OUT | GRADE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| S | Steel 1010/1008 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| A | Aluminum 5056 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | Brass 270/260 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| M | Monel 400 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C | CRES 302*** | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CALL OUT | SPECIFICATION | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3T | ZINC TRIVALENT PER ASTM-B-633, FE/ZN .0003 (8µ) WITH CLEAR PROTECTIVE COATING | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4T | YELLOW ZINC TRIVALENT PER ASTM-B-633, FE/ZN .0003 (8µ) WITH CLEAR PROTECTIVE COATING | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9T | TIN ZINC TRIVALENT PER ESP-P-004, .0003 (8µ) WITH CLEAR PROTECTIVE COATING | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CALL OUT | TYPE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLANK | Open End | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | Closed End | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| S | Sealed | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| W | Wedge Head | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |


See installation tool selection on page 31 - 43..

A-H SERIES SEALED HEAD INSERT PROFILE



SEALED HEAD
THREADED HEX INSERT

The **A-H Series Sealed Head Insert** provides all the features of the standard A-H Series Insert plus the addition of a PVC foam seal that is bonded to the underside head of the insert. This feature provides a weather resistant seal that will withstand 50 PSI–3.4 bars of pressure.

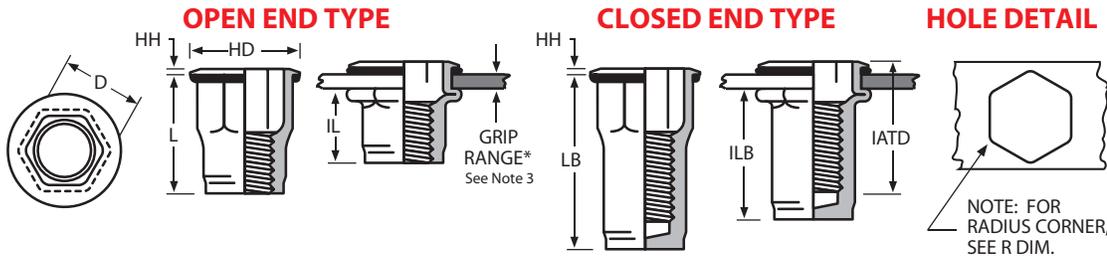

Thread Specifications:
Unified 2B/21 per ASME B1.1
Metric 6H/21 per ASME B1.13M

UNIFIED (INCH) AND METRIC THREAD SIZES

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | HOLE SIZE (ACROSS FLATS) +0.004 / -0.000 | HD ±.010 ±.025* | HH ±.003 | L ±.015 | D MAX. | IL MAX. | LB MAX. | ILB MAX. | IATD** MAX. | R MAX. |
|-------------|-----------------|-------------|---------------|---|-----------------------|-------------|------------|-----------|------------|------------|-------------|----------------|-----------|
| 6-32 UNC | 632 | .020 - .060 | 80 | .250 | .375 | .027 | .385 | .249 | .295 | .755 | .640 | .575 | .015 |
| 6-32 UNC | 632 | .060 - .100 | 130 | .250 | .375 | .027 | .435 | .249 | .295 | .755 | .580 | .640 | .015 |
| 8-32 UNC | 832 | .020 - .060 | 80 | .250 | .375 | .027 | .385 | .249 | .295 | .755 | .640 | .575 | .015 |
| 8-32 UNC | 832 | .060 - .100 | 130 | .250 | .375 | .027 | .435 | .249 | .295 | .755 | .580 | .640 | .015 |
| 10-24 UNC | 1024 | .020 - .100 | 130 | .281 | .390 | .027 | .435 | .280 | .275 | 1.045 | .845 | .695 | .020 |
| 10-24 UNC | 1024 | .100 - .175 | 225 | .281 | .390 | .027 | .535 | .280 | .275 | 1.045 | .735 | .805 | .020 |
| 10-32 UNF | 1032 | .020 - .100 | 130 | .281 | .390 | .027 | .435 | .280 | .275 | 1.045 | .845 | .695 | .020 |
| 10-32 UNF | 1032 | .100 - .175 | 225 | .281 | .390 | .027 | .535 | .280 | .275 | 1.045 | .735 | .805 | .020 |
| 1/4-20 UNC | 420 | .027 - .125 | 165 | .375 | .510 | .030 | .585 | .374 | .400 | 1.205 | 1.015 | .945 | .040 |
| 1/4-20 UNC | 420 | .125 - .195 | 260 | .375 | .510 | .030 | .685 | .374 | .400 | 1.205 | .915 | 1.085 | .040 |
| 5/16-18 UNC | 518 | .027 - .115 | 150 | .500 | .655* | .035 | .685 | .499 | .530 | 1.460 | 1.235 | 1.045 | .040 |
| 5/16-18 UNC | 518 | .130 - .250 | 312 | .500 | .655* | .035 | .845 | .499 | .515 | 1.460 | 1.220 | 1.170 | .040 |
| 3/8-16 UNC | 616 | .027 - .115 | 150 | .500 | .655* | .035 | .685 | .499 | .530 | 1.460 | 1.235 | 1.045 | .040 |
| 3/8-16 UNC | 616 | .130 - .250 | 312 | .500 | .655* | .035 | .845 | .499 | .515 | 1.460 | 1.220 | 1.170 | .040 |
| 1/2-13 UNC | 813 | .063 - .150 | 200 | .687 | .865* | .047 | 1.150 | .686 | .850 | 2.380 | 2.070 | 1.505 | 1.505 |
| 1/2-13 UNC | 813 | .150 - .280 | 350 | .687 | .865* | .047 | 1.300 | .686 | .850 | 2.380 | 1.920 | 1.505 | 1.505 |
| 1/2-13 UNC | 813 | .280 - .400 | 500 | .687 | .865* | .047 | 1.450 | .686 | .860 | 2.380 | 1.770 | 1.505 | 1.505 |

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | HOLE SIZE (ACROSS FLATS) +0.10 / -0.00 | HD ±0.25 ±0.64* | HH ±0.08 | L ±0.38 | D MAX. | IL MAX. | LB MAX. | ILB MAX. | IATD** MAX. | R MAX. |
|----------------|-----------------|--------------|---------------|---|-----------------------|-------------|------------|-----------|------------|------------|-------------|----------------|-----------|
| M4 x 0,7 ISO | 470 | 0,50 - 1,52 | 2.0 | 6,35 | 9,53 | 0,68 | 9,78 | 6,35 | 7,49 | 19,18 | 16,26 | 14,61 | 0,38 |
| M4 x 0,7 ISO | 470 | 1,52 - 2,54 | 3.3 | 6,35 | 9,53 | 0,68 | 11,05 | 6,35 | 7,49 | 19,18 | 14,73 | 16,26 | 0,38 |
| M5 x 0,8 ISO | 580 | 0,50 - 2,54 | 3.3 | 7,14 | 9,91 | 0,68 | 11,05 | 7,10 | 6,99 | 26,54 | 21,46 | 17,65 | 0,50 |
| M5 x 0,8 ISO | 580 | 2,54 - 4,45 | 5.7 | 7,14 | 9,91 | 0,68 | 13,59 | 7,10 | 6,99 | 26,54 | 18,67 | 20,45 | 0,50 |
| M6 x 1,0 ISO | 610 | 0,70 - 3,17 | 4.2 | 9,53 | 12,96 | 0,76 | 14,86 | 9,50 | 10,16 | 30,61 | 25,78 | 24,00 | 1,00 |
| M6 x 1,0 ISO | 610 | 3,17 - 4,95 | 6.6 | 9,53 | 12,96 | 0,76 | 17,40 | 9,50 | 10,16 | 30,61 | 23,24 | 27,56 | 1,00 |
| M8 x 1,25 ISO | 8125 | 0,70 - 2,92 | 3.8 | 12,70 | 16,64* | 0,89 | 17,40 | 12,70 | 13,46 | 37,08 | 31,37 | 26,54 | 1,00 |
| M8 x 1,25 ISO | 8125 | 3,30 - 6,35 | 7.9 | 12,70 | 16,64* | 0,89 | 21,46 | 12,70 | 13,08 | 37,08 | 30,99 | 29,72 | 1,00 |
| M10 x 1,5 ISO | 1015 | 0,70 - 2,92 | 3.8 | 12,70 | 16,64* | 0,89 | 17,40 | 12,70 | 13,46 | 37,08 | 31,37 | 26,54 | 1,00 |
| M10 x 1,5 ISO | 1015 | 3,30 - 6,35 | 7.9 | 12,70 | 16,64* | 0,89 | 21,46 | 12,70 | 13,08 | 37,08 | 30,99 | 29,72 | 1,00 |
| M12 x 1,75 ISO | 12175 | 1,60 - 3,81 | 5.1 | 17,45 | 21,97* | 1,19 | 29,21 | 17,42 | 21,59 | 60,45 | 52,58 | 38,23 | 38,23 |
| M12 x 1,75 ISO | 12175 | 3,81 - 7,11 | 8.9 | 17,45 | 21,97* | 1,19 | 33,02 | 17,42 | 21,59 | 60,45 | 48,77 | 38,23 | 38,23 |
| M12 x 1,75 ISO | 12175 | 7,11 - 10,16 | 12.7 | 17,45 | 21,97* | 1,19 | 36,83 | 17,42 | 21,84 | 60,45 | 44,96 | 38,23 | 38,23 |

NOTE 1: Grip range can be affected by parent material density and actual hole size. AVK suggests trial installations to determine optimum grip.

NOTE 2: Additional UNF fine threads are available. Contact us for details.

NOTE 3: The A-H Series shown on this page incorporates an under head seal which reduces the standard grip range of the part based on the seal thickness. The grip call out remains based on the standard part for part numbering simplicity.


NOTE 4: The PVC foam seal is not recommended for use with petroleum based liquids. **Dimensions in minimum grip condition.

***NOTE 5: Closed End CRES inserts have a reduced "LB" and "ILB" dimension. Contact us for details.

PART NUMBERING SYSTEM



SAMPLE NUMBER: AHS3T-420-165S

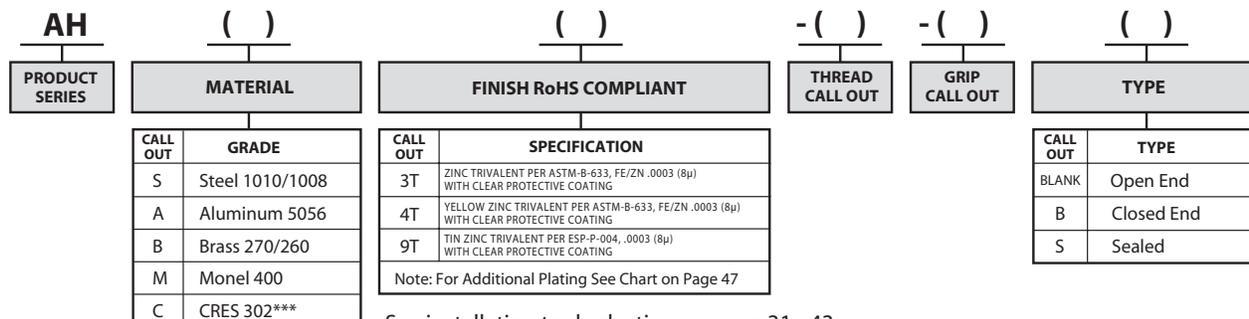

See installation tool selection on page 31 - 43.



A-S SERIES STUD PROFILE

The **A-S Series Stud** offers a unique design advantage in that once installed, a threaded stud is left protruding from the workpiece. Component parts can be located on the stud until final assembly is accomplished with a mating nut. The A-S series is an ideal alternative to clinch or weld studs. The A-S Series is designed to be used with Grade 5 or Metric Class 8.8/9.8 non thread locking type nuts.


The A-S Series Stud is installed using AVK's ARO brand pneumatic tools or AVK's SPPTM pneumatic/hydraulic tool systems. These tools can be located at any position on your assembly line. The A-S Series Stud can be installed either before or after finish.



SPINWALL TECHNOLOGYTM

HOW HOLE FILL WORKS FOR YOU

As the A-S Series is installed, the knurled body expands 360° **FILLING THE HOLE.** This feature provides exceptional torque strength and vibration resistance.

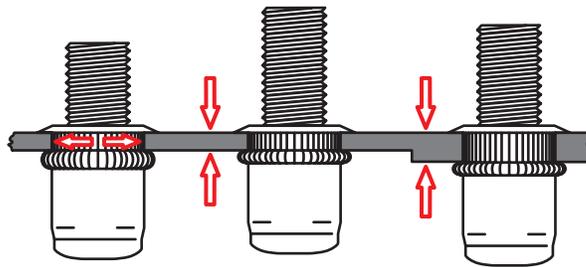

The installation tool then continues to install the stud forming a backside flange even in variable thickness material **WITHOUT ADJUSTMENT.**

DESIGN BENEFITS

- **PROTRUDING STUD** allows component parts to be located on the stud until final assembly is accomplished with a mating nut.
- **EXCEPTIONAL TORQUE STRENGTH** is achieved as the stud's knurled body expands **FILLING THE HOLE.**
- **QUALITY INSTALLATIONS** even in variable thickness materials are assured by AVK's spin/spin ARO pneumatic or AVK's pneumatic/hydraulic SPP ToolTM systems.
- **ELIMINATE PAINT MASKING** procedures as required with weld or clinch studs. The A-S Series Stud can be installed after painting.
- **SUPERIOR CORROSION RESISTANCE** is provided by our standard zinc/yellow trivalent finish (120 hours. Salt spray to white corrosion). Alternative finishes are available.
- **AVAILABLE** in Steel 1010/1008 shell - Steel 1038 threaded stud.

ADDITIONAL DESIGN TYPES

SEALED HEAD

A PVC foam seal is bonded to the underside of the head and when installed provides a weather tight seal. Note that the addition of a seal reduces the parts grip range. Contact us for more information.



WEDGE HEAD

The addition of wedges under the head provides even greater torque capability, especially in soft or thin materials, and is excellent for electrical grounding applications. Contact us for more information.



HEX BODY

The hex shell offers exceptional resistance to spinning once installed. Also available in full body hex version. Contact us for more information.





DOG POINT

An optional Dog-Point provides ease in installing mating hardware and reduces the possibility of cross-threading. AVK offers Dog-Points in a variety of configurations. Contact us for more information.



UNIFIED (INCH) AND METRIC THREAD SIZES

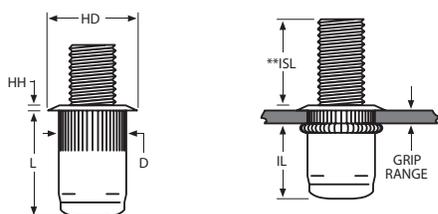

**NOTE: The ISL Dimension shown below is the height of the installed stud at max grip. The height of the stud will increase if it is installed into thinner material. To calculate actual ISL use this formula: Max grip – actual grip + ISL = Actual ISL

Thread Specifications: Unified 2A/21 per ASME B1.1
Metric 6G/21 per ASME B1.13M

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | STUD LENGTHS** | | | HOLE SIZE +.006 / -.000 | HD ±.010 ±.025* | HH ±.003 | L ±.020 | D MAX. | IL MAX. |
|-------------|-----------------|------------|---------------|-----------------|-----------------|-----------------|----------------------------|-----------------------|-------------|------------|-----------|------------|
| | | | | ISL CALL OUT | ISL CALL OUT | ISL CALL OUT | | | | | | |
| 6-32 UNC | 632 | .020-.080 | 80 | .500 500 | .625 625 | .750 750 | 17/64 (.2656) | .390 | .030 | .485 | .265 | .360 |
| 6-32 UNC | 632 | .080-.130 | 130 | .450 400 | .575 575 | .700 700 | 17/64 (.2656) | .390 | .030 | .535 | .265 | .360 |
| 8-32 UNC | 832 | .020-.080 | 80 | .500 500 | .625 625 | .750 750 | 17/64 (.2656) | .390 | .030 | .485 | .265 | .360 |
| 8-32 UNC | 832 | .080-.130 | 130 | .450 400 | .575 575 | .700 700 | 17/64 (.2656) | .390 | .030 | .535 | .265 | .360 |
| 10-24 UNC | 1024 | .020-.130 | 130 | .500 500 | .625 625 | .750 750 | 19/64 (.2969) | .415 | .030 | .545 | .296 | .380 |
| 10-24 UNC | 1024 | .130-.225 | 225 | .405 405 | .530 530 | .655 655 | 19/64 (.2969) | .415 | .030 | .655 | .296 | .380 |
| 10-32 UNF | 1032 | .020-.130 | 130 | .500 500 | .625 625 | .750 750 | 19/64 (.2969) | .415 | .030 | .545 | .296 | .380 |
| 10-32 UNF | 1032 | .130-.225 | 225 | .405 405 | .530 530 | .655 655 | 19/64 (.2969) | .415 | .030 | .655 | .296 | .380 |
| 1/4-20 UNC | 420 | .027-.165 | 165 | .625 625 | .8125 8125 | 1.000 1000 | 25/64 (.3906) | .500 | .030 | .670 | .390 | .465 |
| 1/4-20 UNC | 420 | .165-.260 | 260 | .530 530 | .7175 7175 | .905 905 | 25/64 (.3906) | .500 | .030 | .770 | .390 | .465 |
| 5/16-18 UNC | 518 | .027-.150 | 150 | .625 625 | .875 875 | 1.125 1125 | 17/32 (.5312) | .685* | .035 | .810 | .530 | .600 |
| 5/16-18 UNC | 518 | .150-.312 | 312 | .463 463 | .713 713 | .963 963 | 17/32 (.5312) | .685* | .035 | .925 | .530 | .555 |
| 3/8-16 UNC | 616 | .027-.150 | 150 | .750 750 | 1.000 1000 | 1.250 1250 | 17/32 (.5312) | .685* | .035 | .810 | .530 | .600 |
| 3/8-16 UNC | 616 | .150-.312 | 312 | .588 588 | .838 838 | 1.088 1088 | 17/32 (.5312) | .685* | .035 | .925 | .530 | .535 |

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | STUD LENGTHS** | | | HOLE SIZE +.015 / -.000 | HD ±0,25 ±0,64* | HH ±0,08 | L ±0,50 | D MAX. | IL MAX. |
|---------------|-----------------|-------------|---------------|-----------------|-----------------|-----------------|----------------------------|-----------------------|-------------|------------|-----------|------------|
| | | | | ISL CALL OUT | ISL CALL OUT | ISL CALL OUT | | | | | | |
| M4 x 0,7 ISO | 470 | 0,50 - 2,00 | 2,0 | 12,0 12 | 15,0 15 | 20,0 20 | 6,75 | 9,91 | 0,76 | 12,32 | 6,73 | 9,15 |
| M4 x 0,7 ISO | 470 | 2,00 - 3,30 | 3,3 | 10,7 10,7 | 13,7 13,7 | 18,7 18,7 | 6,75 | 9,91 | 0,76 | 13,59 | 6,73 | 9,15 |
| M5 x 0,8 ISO | 580 | 0,50 - 3,30 | 3,3 | 12,0 12 | 15,0 15 | 20,0 20 | 7,60 | 10,54 | 0,76 | 13,84 | 7,52 | 9,65 |
| M5 x 0,8 ISO | 580 | 3,30 - 5,70 | 5,7 | 9,6 9,6 | 12,6 12,6 | 17,6 17,6 | 7,60 | 10,54 | 0,76 | 16,64 | 7,52 | 9,65 |
| M6 x 1,0 ISO | 610 | 0,70 - 4,20 | 4,2 | 15,0 15 | 20,0 20 | 25,0 25 | 10,00 | 12,70 | 0,76 | 17,02 | 9,91 | 11,81 |
| M6 x 1,0 ISO | 610 | 4,20 - 6,60 | 6,6 | 12,6 12,6 | 17,6 17,6 | 22,6 22,6 | 10,00 | 12,70 | 0,76 | 19,56 | 9,91 | 11,81 |
| M8 x 1,25 ISO | 8125 | 0,70 - 3,80 | 3,8 | 16,0 16 | 22,0 22 | 28,0 28 | 13,50 | 17,40* | 0,89 | 20,57 | 13,46 | 15,24 |
| M8 x 1,25 ISO | 8125 | 3,80 - 7,90 | 7,9 | 11,9 11,9 | 17,9 17,9 | 23,9 23,9 | 13,50 | 17,40* | 0,89 | 23,50 | 13,46 | 14,10 |
| M10 x 1,5 ISO | 1015 | 0,70 - 3,80 | 3,8 | 20,0 20 | 25,0 25 | 30,0 30 | 13,50 | 17,40* | 0,89 | 20,57 | 13,46 | 15,24 |
| M10 x 1,5 ISO | 1015 | 3,80 - 7,90 | 7,9 | 15,9 15,9 | 20,9 20,9 | 25,9 25,9 | 13,50 | 17,40* | 0,89 | 23,50 | 13,46 | 13,60 |

NOTE 1: Grip range can be affected by parent material density and actual hole size. AVK suggests trial installations to determine optimum grip.

NOTE 2: Additional UNF fine threads are available. Contact us for details.

**Dimensions in maximum grip condition.

PART NUMBERING SYSTEM



SAMPLE NUMBER: ASS3T-420-165-625

| AS | () | () | - () | - () | - () | () | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|------------------------------|------------------------|----------------------|-------------------------------------|--|--|---|----------|---------------|----|---|----|--|----|--|---|--|--|--|--|---|----------|------|-------|----------|---|-------------|---|------------|---|----------|----|-----------|
| PRODUCT SERIES | MATERIAL | FINISH RoHS COMPLIANT | THREAD CALL OUT | GRIP CALL OUT | STUD LENGTH CALL OUT | TYPE | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <tr> <th>CALL OUT</th> <th>GRADE</th> </tr> <tr> <td>S</td> <td>Steel Shell 1010 Steel Stud 1038</td> </tr> <tr> <td colspan="2">Other Materials Available Upon Request</td> </tr> </table> | CALL OUT | GRADE | S | Steel Shell 1010 Steel Stud 1038 | Other Materials Available Upon Request | | <table border="1"> <tr> <th>CALL OUT</th> <th>SPECIFICATION</th> </tr> <tr> <td>3T</td> <td>ZINC TRIVALENT PER ASTM-B-633, FE/ZN .0003 (8µ) WITH CLEAR PROTECTIVE COATING</td> </tr> <tr> <td>4T</td> <td>YELLOW ZINC TRIVALENT PER ASTM-B-633, FE/ZN .0003 (8µ) WITH CLEAR PROTECTIVE COATING</td> </tr> <tr> <td>9T</td> <td>TIN ZINC TRIVALENT PER ESP-P-004, .0003 (8µ) WITH CLEAR PROTECTIVE COATING</td> </tr> <tr> <td colspan="2">Note: For Additional Plating See Chart on Page 47</td> </tr> </table> | CALL OUT | SPECIFICATION | 3T | ZINC TRIVALENT PER ASTM-B-633, FE/ZN .0003 (8µ) WITH CLEAR PROTECTIVE COATING | 4T | YELLOW ZINC TRIVALENT PER ASTM-B-633, FE/ZN .0003 (8µ) WITH CLEAR PROTECTIVE COATING | 9T | TIN ZINC TRIVALENT PER ESP-P-004, .0003 (8µ) WITH CLEAR PROTECTIVE COATING | Note: For Additional Plating See Chart on Page 47 | | | | | <table border="1"> <tr> <th>CALL OUT</th> <th>TYPE</th> </tr> <tr> <td>BLANK</td> <td>Standard</td> </tr> <tr> <td>S</td> <td>Sealed Head</td> </tr> <tr> <td>W</td> <td>Wedge Head</td> </tr> <tr> <td>H</td> <td>Hex Body</td> </tr> <tr> <td>DP</td> <td>Dog Point</td> </tr> </table> | CALL OUT | TYPE | BLANK | Standard | S | Sealed Head | W | Wedge Head | H | Hex Body | DP | Dog Point |
| CALL OUT | GRADE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| S | Steel Shell 1010 Steel Stud 1038 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Other Materials Available Upon Request | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CALL OUT | SPECIFICATION | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3T | ZINC TRIVALENT PER ASTM-B-633, FE/ZN .0003 (8µ) WITH CLEAR PROTECTIVE COATING | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4T | YELLOW ZINC TRIVALENT PER ASTM-B-633, FE/ZN .0003 (8µ) WITH CLEAR PROTECTIVE COATING | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9T | TIN ZINC TRIVALENT PER ESP-P-004, .0003 (8µ) WITH CLEAR PROTECTIVE COATING | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Note: For Additional Plating See Chart on Page 47 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CALL OUT | TYPE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLANK | Standard | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| S | Sealed Head | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| W | Wedge Head | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H | Hex Body | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DP | Dog Point | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

See installation tool selection on page 31 - 43.



A-T SERIES INSERT PROFILE

The **A-T Series Insert** is unique in that it can be installed into most any material above .030/.76 mm in thickness. As the A-T Series is installed, the threaded portion is completely swaged 360° into the sleeve portion and the hole. This permits the A-T Series to be used with Grade 8/Metric 12.9 mating screws.


The A-T Series Insert is installed using lightweight, handheld pneumatic ARO tools that can be located at any position in your product's assembly sequence. The A-T Series Insert can be installed either prior to or after finish.



360° SWAGING

HOW IT WORKS FOR YOU

As the A-T Series Insert is installed, the threaded nut portion is drawn into the upper sleeve portion.

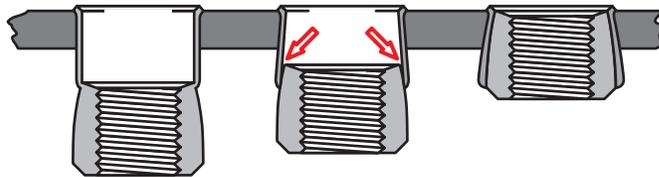

As this occurs a 360° swaging action takes place anchoring A-T Series Insert in the parent material.

DESIGN BENEFITS

- **REDUCED OVERALL LENGTH** of the installed A-T Series Insert allows it to be used in limited clearance applications.
- **QUALITY INSTALLATIONS** even in variable thickness materials are assured by our spin/spin torque stall tools (featured on page 30).
- **INVENTORY REDUCTION** is possible because one A-T Series Insert will work in any thickness.
- **INSTALLS INTO MOST ANY MATERIAL** with a thickness over .030/.76 mm.
- **CAN BE USED WITH GRADE 8/METRIC CLASS 12.9 SCREWS** due to the A-T Series high shear load capability.
- **AVAILABLE** in Steel, Aluminum, Brass and Series 304 Stainless Steel are available by special order. Contact us for details.

ADDITIONAL DESIGN TYPES


CLOSED END

Thread area is enclosed eliminating leakage past the threads from either side of the application. See page 23.



JOINT DESIGN PRACTICES

AVK recommends that the mating part comes in contact with the head of the A-T Series Insert. If a gap or clearance hole exists between the mating part and the A-T Series Insert, the threaded nut portion may rotate or pull through the parent material.

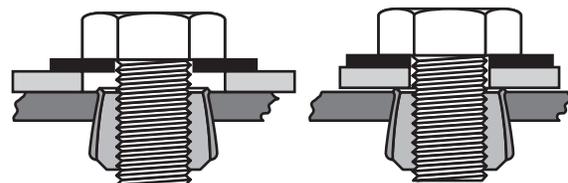

NOT RECOMMENDED


RECOMMENDED

UNIFIED (INCH) AND METRIC THREAD SIZES





INSERT
KNURLED THREADED INSERTS

OPEN END TYPE



CLOSED END TYPE



| THREAD SIZE | THREAD CALL OUT | HD ±.005 | L ±.015 | D MAX. | IL REF. | LB ±.015 | ILB REF. | IATD MAX. | HOLE DEPTH MIN. |
|-------------|-----------------|----------|---------|--------|---------|----------|----------|-----------|-----------------|
| 4-40 UNC | 440 | .211 | .370 | .1875 | .205 | .660 | .495 | .395 | .400 |
| 6-32 UNC | 632 | .240 | .370 | .2185 | .205 | .675 | .505 | .410 | .400 |
| 8-32 UNC | 832 | .269 | .370 | .2495 | .205 | .675 | .505 | .410 | .400 |
| 10-24 UNC | 1024 | .306 | .370 | .2805 | .205 | .685 | .520 | .385 | .400 |
| 10-32 UNF | 1032 | .306 | .370 | .2805 | .205 | .685 | .520 | .385 | .400 |
| 1/4-20 UNC | 420 | .400 | .515 | .3745 | .275 | 1.005 | .760 | .615 | .540 |
| 5/16-18 UNC | 518 | .528 | .615 | .4995 | .325 | 1.065 | .770 | .630 | .640 |
| 3/8-16 UNC | 616 | .588 | .745 | .5615 | .390 | 1.450 | 1.095 | .890 | .770 |
| 1/2-13 UNC | 813 | .800 | .935 | .7485 | .485 | NA | NA | NA | .960 |

| THREAD SIZE | THREAD CALL OUT | HD ±0,13 | L ±0,38 | D MAX. | IL REF. | LB ±0,38 | ILB REF. | IATD MAX. | HOLE DEPTH MIN. |
|----------------|-----------------|----------|---------|--------|---------|----------|----------|-----------|-----------------|
| M3 x 0,5 ISO | 350 | 5,36 | 9,40 | 4,76 | 5,21 | 16,77 | 12,57 | 10,03 | 10,16 |
| M4 x 0,7 ISO | 470 | 6,83 | 9,40 | 6,34 | 5,21 | 17,15 | 12,83 | 10,41 | 10,16 |
| M5 x 0,8 ISO | 580 | 7,77 | 9,40 | 7,12 | 5,21 | 17,40 | 13,21 | 9,78 | 10,16 |
| M6 x 1,0 ISO | 610 | 10,16 | 13,08 | 9,51 | 6,99 | 25,53 | 19,30 | 15,62 | 13,72 |
| M8 x 1,25 ISO | 8125 | 13,41 | 15,62 | 12,69 | 8,26 | 27,05 | 19,56 | 16,00 | 16,26 |
| M10 x 1,5 ISO | 1015 | 14,94 | 18,92 | 14,26 | 9,91 | 36,83 | 27,81 | 22,61 | 19,56 |
| M12 x 1,75 ISO | 12175 | 20,32 | 23,75 | 19,01 | 12,32 | NA | NA | NA | 24,38 |

HOLE SIZE / MATERIAL THICKNESS CHART

| THREAD SIZE | .030 - .090 MAT. THICKNESS | | .091 - .124 MAT. THICKNESS | | .125 - .186 MAT. THICKNESS | | .187 - OVER MAT. THICKNESS | |
|-------------|----------------------------|---------|----------------------------|---------|----------------------------|---------|----------------------------|---------|
| | DRILL SIZE | DECIMAL |
| 4-40 UNC | 3/16 | .1875 | #10 | .1935 | #10 | .1935 | #9 | .1960 |
| 6-32 UNC | 7/32 | .2188 | #2 | .2210 | #1 | .2280 | #1 | .2280 |
| 8-32 UNC | 1/4 | .2500 | "F" | .2570 | 17/64 | .2656 | 17/64 | .2656 |
| 10-24 UNC | 9/32 | .2812 | "L" | .2900 | "L" | .2900 | 19/64 | .2969 |
| 10-32 UNF | 9/32 | .2812 | "L" | .2900 | "L" | .2900 | 19/64 | .2969 |
| 1/4-20 UNC | 3/8 | .3750 | 3/8 | .3750 | "W" | .3860 | 25/64 | .3906 |
| 5/16-18 UNC | 1/2 | .5000 | 1/2 | .5000 | 33/64 | .5156 | 33/64 | .5156 |
| 3/8-16 UNC | 9/16 | .5625 | 9/16 | .5625 | 37/64 | .5781 | 37/64 | .5781 |
| 1/2-13 UNC | 3/4 | .7500 | 49/64 | .7656 | 25/32 | .7810 | 51/64 | .7970 |


| THREAD SIZE | 0,76 - 2,29 MAT. THICKNESS | | 2,31 - 3,15 MAT. THICKNESS | | 3,17 - 4,72 MAT. THICKNESS | | 4,72 - OVER MAT. THICKNESS | |
|----------------|----------------------------|---------|----------------------------|---------|----------------------------|---------|----------------------------|---------|
| | DRILL SIZE | DECIMAL |
| M3 x 0,5 ISO | 4,75 | .1875 | 4,90 | .1935 | 4,90 | .1935 | 4,97 | .1960 |
| M4 x 0,7 ISO | 6,35 | .2500 | 6,52 | .2570 | 6,74 | .2656 | 6,74 | .2656 |
| M5 x 0,8 ISO | 7,14 | .2812 | 7,36 | .2900 | 7,36 | .2900 | 7,54 | .2969 |
| M6 x 1,0 ISO | 9,52 | .3750 | 9,52 | .3750 | 9,80 | .3860 | 9,92 | .3906 |
| M8 x 1,25 ISO | 12,70 | .5000 | 12,70 | .5000 | 13,09 | .5156 | 13,09 | .5156 |
| M10 x 1,5 ISO | 14,28 | .5625 | 14,28 | .5625 | 14,68 | .5781 | 14,68 | .5781 |
| M12 x 1,75 ISO | 19,05 | .7500 | 19,44 | .7656 | 19,83 | .7810 | 20,24 | .7970 |

FINISH: The standard specified finish for the A-T Series Insert is tin. Alteration to this finish will reduce performance. *THREAD CLASS: The A-T Series Insert's internal threads are manufactured oversized to compensate for resulting thread portion shrinkage during the installation swaging process. They are not gaugeable prior to or after installation but will be compatible with Class 2A/3A or 6g screws after installation.

NOTE: Hole sizes: The application should be tested before hole size is specified.


PART NUMBERING SYSTEM

SAMPLE NUMBER: AT55-610

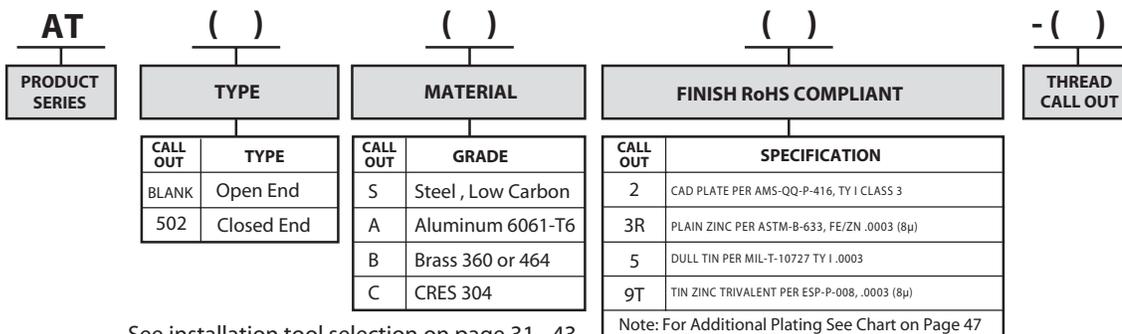

MATERIAL TYPE IDENTIFICATION GROOVES

All materials for the A-T Series when plated look similar. Radial grooves are machined into the part for material identification.




See installation tool selection on page 31 - 43.



A-W SERIES INSERT PROFILE

The **A-W Series Insert** can be installed into most any material softer than itself that is thicker than .062/1,57. The A-W Series provides exceptional shear strength and pull out in fiberglass and plywoods. The brass A-W Series Insert is particularly useful for the fiberglass boat industry.

The A-W Series Insert is installed using lightweight, handheld pneumatic tools that can be located at any position in your product's assembly sequence. The A-W Series Insert can be installed either prior to or after finish.

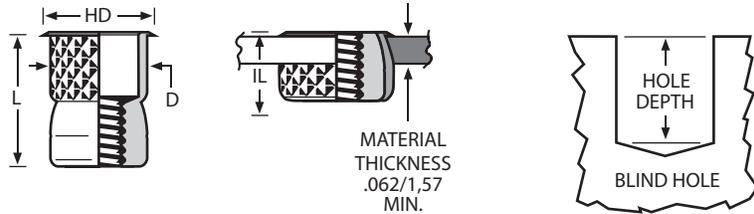

UNIFIED (INCH) AND METRIC THREAD

| THREAD SIZE | THREAD CALL OUT | HOLE SIZE +.005 / -.000 | HD ±.005 | L ±.015 | D MAX. | IL REF. | HOLE DEPTH MIN. |
|-------------|-----------------|-------------------------|----------|---------|--------|---------|-----------------|
| 6-32 UNC | 632 | 15/64 (.234) | .255 | .370 | .233 | .205 | .400 |
| 8-32 UNC | 832 | 17/64 (.266) | .285 | .370 | .264 | .205 | .400 |
| 10-24 UNC | 1024 | 19/64 (.297) | .320 | .370 | .295 | .205 | .400 |
| 10-32 UNF | 1032 | 19/64 (.297) | .320 | .370 | .295 | .205 | .400 |
| 1/4-20 UNC | 420 | 25/64 (.391) | .415 | .515 | .389 | .275 | .540 |
| 5/16-18 UNC | 518 | 17/32 (.531) | .550 | .615 | .528 | .325 | .640 |
| 3/8-16 UNC | 616 | 19/32 (.594) | .615 | .740 | .590 | .390 | .770 |

| THREAD SIZE | THREAD CALL OUT | HOLE SIZE +0,13 / -0,00 | HD ±0,13 | L ±0,38 | D MAX. | IL REF. | HOLE DEPTH MIN. |
|---------------|-----------------|-------------------------|----------|---------|--------|---------|-----------------|
| M4 x 0,7 ISO | 470 | 6,75 | 7,24 | 9,40 | 6,71 | 5,21 | 10,16 |
| M5 x 0,8 ISO | 580 | 7,54 | 8,13 | 9,40 | 7,50 | 5,21 | 10,16 |
| M6 x 1,0 ISO | 610 | 9,92 | 10,54 | 13,08 | 9,88 | 6,99 | 13,72 |
| M8 x 1,25 ISO | 8125 | 13,49 | 13,97 | 15,62 | 13,41 | 8,26 | 16,26 |
| M10 x 1,5 ISO | 1015 | 15,00 | 15,62 | 18,80 | 14,99 | 9,91 | 19,56 |

NOTE 1: Additional UNF thread sizes available. Contact us for details.


NOTE 2: HOLE SIZE: The A-W Series Insert hole size will be dependent on parent material density. Experimentation is required for optimum performance.

NOTE 3: FINISH: The standard specified finish for the A-W Series Insert is tin. Alteration to this finish will reduce performance.

*THREAD CLASS: The A-W Series Insert's internal threads are manufactured oversized to compensate for resulting thread portion shrinkage during the installation swaging process. They are not gaugeable prior to or after installation but will be compatible with Class 2A/3A or 6g screws after installation.


PART NUMBERING SYSTEM

SAMPLE NUMBER: AWS5-420

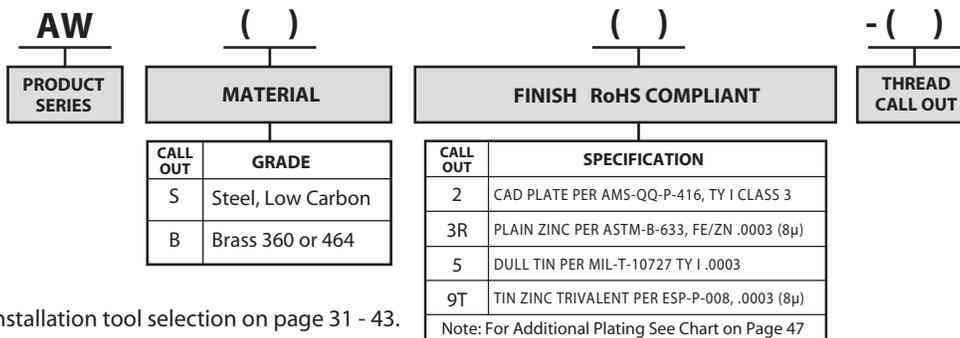

MATERIAL TYPE IDENTIFICATION GROOVES

All materials for the A-W Series when plated look similar. Radial grooves are machined into the part for material identification.




A-O SERIES PROFILE



The A-O Series Insert features a reduced profile head design which is similar to the superior A-K Series Insert. It also has a smaller body diameter than the A-K Series Insert. The A-O Series Insert can be specified when the application design parameters require a smaller hole or closer hole to edge tolerances.

The A-O Series can be installed with AVK's ARO brand pneumatic tools or AVK's pneumatic/hydraulic SPP Tool™ system. These tools can be located at any position on your assembly line. The A-O Series can be installed either prior to or after finish further enhancing its flexibility in your manufacturing environment.



Thread Specifications: Unified 2B/21 per ASME B1.1
Metric 6H/21 per ASME B1.13M



UNIFIED (INCH) AND METRIC THREAD

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | HOLE SIZE +.006 / -.000 | HD ±.010 | HH ±.003 | L ±.015 | D MAX. | IL MAX. |
|-------------|-----------------|-------------|---------------|-------------------------|----------|----------|---------|--------|---------|
| 6-32 UNC | 632 | .020 - .080 | 80 | 1/4 (.250) | .300 | .018 | .385 | .249 | .315 |
| 8-32 UNC | 832 | .020 - .080 | 80 | 1/4 (.250) | .300 | .018 | .385 | .249 | .315 |
| 10-24 UNC | 1024 | .020 - .130 | 130 | 9/32 (.2812) | .320 | .020 | .440 | .280 | .330 |
| 10-32 UNF | 1032 | .020 - .130 | 130 | 9/32 (.2812) | .320 | .020 | .440 | .280 | .330 |
| 1/4-20 UNC | 420 | .030 - .165 | 165 | 3/8 (.375) | .425 | .022 | .580 | .374 | .440 |
| 5/16-18 UNC | 518 | .040 - .200 | 200 | 1/2 (.500) | .560 | .022 | .690 | .499 | .540 |
| 3/8-16 UNC | 616 | .040 - .200 | 200 | 1/2 (.500) | .560 | .022 | .690 | .499 | .540 |


| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | HOLE SIZE +.015 / -.000 | HD ±.025 | HH ±.008 | L ±.038 | D MAX. | IL MAX. |
|---------------|-----------------|-------------|---------------|-------------------------|----------|----------|---------|--------|---------|
| M4 x 0,7 ISO | 470 | 0,50 - 2,00 | 2.0 | 6,4 | 7,49 | 0,46 | 9,78 | 6,32 | 8,00 |
| M5 x 0,8 ISO | 580 | 0,50 - 3,30 | 3.3 | 7,2 | 8,13 | 0,51 | 11,18 | 7,11 | 8,38 |
| M6 x 1,0 ISO | 610 | 0,76 - 4,20 | 4.2 | 9,6 | 10,80 | 0,56 | 14,73 | 9,50 | 11,18 |
| M8 x 1,25 ISO | 8125 | 1,02 - 5,10 | 5.1 | 12,7 | 14,22 | 0,56 | 17,53 | 12,67 | 13,72 |
| M10 x 1,5 ISO | 1015 | 1,02 - 5,10 | 5.1 | 12,7 | 14,22 | 0,56 | 17,53 | 12,67 | 13,72 |

NOTE 1: Grip range can be affected by parent material density and actual hole size. AVK suggests trial installations to determine optimum grip.
NOTE 2: UNF fine threads are available. Contact us for details.

PART NUMBERING SYSTEM



SAMPLE NUMBER: AOS4T-420-165

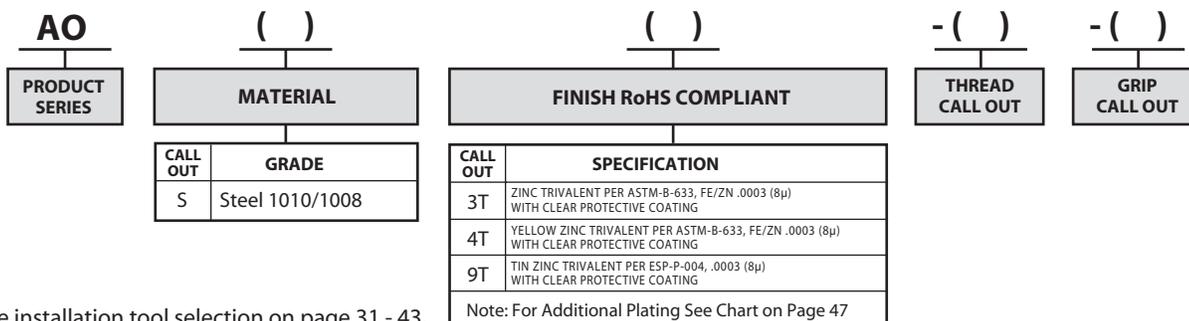

See installation tool selection on page 31 - 43.



RIVET NUT
THREADED INSERT

R-N SERIES RIVET NUT PROFILE

The Steel **R-N Series Rivet Nut** features a heavy duty head profile and increased wall thickness in the collapse area. This makes the R-N Series ideal for leg leveling applications as shown on page 8. The Steel R-N Series is designed to be used with Grade 5 or Metric Class 8.8/9.8 mating screws.


The R-N Series Rivet Nut can be installed using AVK's pneumatic/ hydraulic SPP Tool™ systems or the specific rivet nut tools shown on page 36. The R-N Series Rivet Nut's heavier wall thickness and resulting upset load requires this type of tool be used for installation. The R-N Series can be installed either prior to or after finish.



COLD FORMING TECHNOLOGY™

HOW IT WORKS FOR YOU

The R-N Series Rivet Nuts are manufactured using state-of-the-art cold forming technology. This provides very precise tolerances. All surfaces of the R-N Series are **FORMED**, not machined. This provides excellent quality.

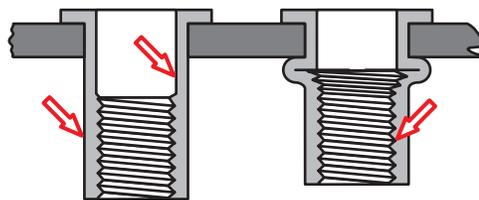

The internal thread of the R-N Series Rivet Nut is roll **FORMED** not machined. This provides excellent thread strength.

DESIGN BENEFITS

- **INCREASED PUSH-OUT LOADS** are achievable in leg leveling applications when using the R-N Series due to its heavy duty head profile and thick wall construction.
- **SUPERIOR THREAD STRENGTH** is provided due to our internal rolled thread manufacturing process.
- **SUPERIOR CORROSION RESISTANCE** is provided by our "9T" finish (500 hours plus) see page 47.
- **UNIFORM INSTALLATION** is guaranteed because of the dimensional tolerances and concentricity tolerances built into our product made possible by our cold forming technology.
- **AVAILABLE** in steel and aluminum. For additional materials, contact us for availability.
- **NAS1329 and NAS1330** with "DFAR" material is available upon request.

ADDITIONAL DESIGN TYPES

CLOSED END

Thread area is enclosed eliminating leakage past the threads from either side of the application. Contact us for availability.



KEYED HEAD

An underside of the head "key" projection when placed into a matching "keyed" hole design provides additional torque resistance. Contact us for availability.



100° COUNTERSUNK HEAD


A 100° countersunk head profile when installed into a matching countersunk hole provides a flush installation. Contact us for availability.



FLATHEAD UNIFIED (INCH) AND METRIC THREAD SIZES




"M" INDICATES METRIC THREAD



MFG. I.D. MARK

RADIAL GRIP I.D. MARK

OPEN END TYPE

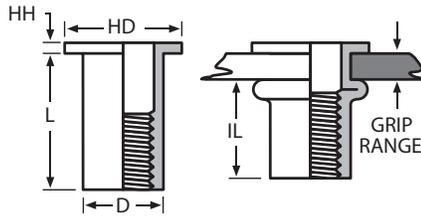

Thread Specifications: Unified MIL-S-7742/ASME-B1.1
Metric 6H/21 per ASME B1.13M

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | I.D. MARK | HOLE SIZE +.003 / -.000 | HD ±.015 | HH NOM. | L ±.015 | D +.000 -.004 | IL REF. |
|-------------|-----------------|-------------|---------------|-----------|-------------------------|----------|---------|---------|---------------|---------|
| 4-40 UNC | 440 | .010 - .060 | 60 | BLANK | 5/32 (.155) | .270 | .025 | .345 | .155 | .230 |
| 4-40 UNC | 440 | .060 - .085 | 85 | 1-RAD | 5/32 (.155) | .270 | .025 | .370 | .155 | .230 |
| 4-40 UNC | 440 | .085 - .110 | 110 | 2-RAD | 5/32 (.155) | .270 | .025 | .400 | .155 | .230 |
| 6-32 UNC | 632 | .010 - .075 | 75 | 1-RAD | #12 (.189) | .325 | .032 | .438 | .189 | .300 |
| 6-32 UNC | 632 | .075 - .120 | 120 | 3-RAD | #12 (.189) | .325 | .032 | .500 | .189 | .315 |
| 6-32 UNC | 632 | .120 - .160 | 160 | 5-RAD | #12 (.189) | .325 | .032 | .500 | .189 | .270 |
| 8-32 UNC | 832 | .010 - .075 | 75 | 1-RAD | #2 (.221) | .357 | .032 | .438 | .221 | .300 |
| 8-32 UNC | 832 | .075 - .120 | 120 | 3-RAD | #2 (.221) | .357 | .032 | .500 | .221 | .315 |
| 8-32 UNC | 832 | .120 - .160 | 160 | 5-RAD | #2 (.221) | .357 | .032 | .500 | .221 | .270 |
| 10-32 UNF | 1032 | .010 - .080 | 80 | BLANK | 1/4 (.250) | .406 | .038 | .531 | .250 | .380 |
| 10-32 UNF | 1032 | .080 - .130 | 130 | 1-RAD | 1/4 (.250) | .406 | .038 | .594 | .250 | .390 |
| 10-32 UNF | 1032 | .130 - .180 | 180 | 2-RAD | 1/4 (.250) | .406 | .038 | .641 | .250 | .390 |
| 1/4-20 UNC | 420 | .020 - .080 | 80 | BLANK | Q (.332) | .475 | .058 | .625 | .332 | .450 |
| 1/4-20 UNC | 420 | .080 - .140 | 140 | 1-RAD | Q (.332) | .475 | .058 | .687 | .332 | .450 |
| 1/4-20 UNC | 420 | .140 - .200 | 200 | 2-RAD | Q (.332) | .475 | .058 | .750 | .332 | .450 |
| 5/16-18 UNC | 518 | .030 - .125 | 125 | BLANK | Z (.413) | .665 | .062 | .750 | .413 | .505 |
| 5/16-18 UNC | 518 | .125 - .200 | 200 | 1-RAD | Z (.413) | .665 | .062 | .875 | .413 | .555 |
| 5/16-18 UNC | 518 | .200 - .275 | 275 | 2-RAD | Z (.413) | .665 | .062 | .937 | .413 | .540 |
| 3/8-16 UNC | 616 | .030 - .115 | 115 | BLANK | 12,5mm (.490) | .781 | .088 | .844 | .490 | .585 |
| 3/8-16 UNC | 616 | .115 - .200 | 200 | 1-RAD | 12,5mm (.490) | .781 | .088 | .938 | .490 | .595 |
| 3/8-16 UNC | 616 | .200 - .285 | 285 | 2-RAD | 12,5mm (.490) | .781 | .088 | 1.031 | .490 | .605 |
| 1/2-13 UNC | 813 | .050 - .150 | 150 | BLANK | 5/8 (.625) | .906 | .085 | .906 | .625 | .605 |
| 1/2-13 UNC | 813 | .150 - .250 | 250 | 1-RAD | 5/8 (.625) | .906 | .085 | 1.031 | .625 | .630 |
| 1/2-13 UNC | 813 | .250 - .350 | 350 | 2-RAD | 5/8 (.625) | .906 | .085 | 1.141 | .625 | .640 |


| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | I.D. MARK | HOLE SIZE +0,08 / -0,00 | HD ±0,38 | HH NOM. | L ±0,38 | D +0,00 -0,10 | IL REF. |
|----------------|-----------------|-------------|---------------|-----------|-------------------------|----------|---------|---------|---------------|---------|
| M3 x 0,5 ISO | 350 | 0,25 - 1,00 | 1.0 | BLANK | 3,94 | 6,68 | 0,63 | 8,00 | 3,93 | 5,61 |
| M3 x 0,5 ISO | 350 | 1,00 - 1,75 | 1.75 | 1-RAD | 3,94 | 6,68 | 0,63 | 8,75 | 3,93 | 5,61 |
| M3 x 0,5 ISO | 350 | 1,75 - 2,50 | 2.5 | 2-RAD | 3,94 | 6,68 | 0,63 | 9,50 | 3,93 | 5,61 |
| M4 x 0,7 ISO | 470 | 0,25 - 2,00 | 2.0 | BLANK | 5,60 | 9,01 | 0,81 | 11,00 | 5,61 | 7,08 |
| M4 x 0,7 ISO | 470 | 2,00 - 3,00 | 3.0 | 1-RAD | 5,60 | 9,01 | 0,81 | 12,00 | 5,61 | 7,08 |
| M4 x 0,7 ISO | 470 | 3,00 - 4,00 | 4.0 | 2-RAD | 5,60 | 9,01 | 0,81 | 13,00 | 5,61 | 7,08 |
| M5 x 0,8 ISO | 580 | 0,25 - 2,00 | 2.0 | BLANK | 7,20 | 11,17 | 1,22 | 14,50 | 7,13 | 10,09 |
| M5 x 0,8 ISO | 580 | 2,00 - 3,50 | 3.5 | 1-RAD | 7,20 | 11,17 | 1,22 | 16,00 | 7,13 | 10,09 |
| M5 x 0,8 ISO | 580 | 3,50 - 5,00 | 5.0 | 2-RAD | 7,20 | 11,17 | 1,22 | 17,50 | 7,13 | 10,09 |
| M6 x 1,0 ISO | 610 | 0,75 - 2,00 | 2.0 | BLANK | 8,50 | 13,43 | 1,47 | 15,50 | 8,43 | 10,58 |
| M6 x 1,0 ISO | 610 | 2,00 - 3,50 | 3.5 | 1-RAD | 8,50 | 13,43 | 1,47 | 17,00 | 8,43 | 10,58 |
| M6 x 1,0 ISO | 610 | 3,50 - 5,00 | 5.0 | 2-RAD | 8,50 | 13,43 | 1,47 | 18,50 | 8,43 | 10,58 |
| M8 x 1,25 ISO | 8125 | 1,00 - 3,00 | 3.0 | BLANK | 10,50 | 16,65 | 1,57 | 18,00 | 10,48 | 11,83 |
| M8 x 1,25 ISO | 8125 | 3,00 - 5,00 | 5.0 | 1-RAD | 10,50 | 16,65 | 1,57 | 20,00 | 10,48 | 11,83 |
| M8 x 1,25 ISO | 8125 | 5,00 - 7,00 | 7.0 | 2-RAD | 10,50 | 16,65 | 1,57 | 22,00 | 10,48 | 11,83 |
| M10 x 1,5 ISO | 1015 | 1,00 - 3,00 | 3.0 | BLANK | 12,50 | 19,50 | 2,23 | 20,00 | 12,44 | 13,20 |
| M10 x 1,5 ISO | 1015 | 3,00 - 5,50 | 5.5 | 1-RAD | 12,50 | 19,50 | 2,23 | 22,50 | 12,44 | 13,20 |
| M10 x 1,5 ISO | 1015 | 5,50 - 8,00 | 8.0 | 2-RAD | 12,50 | 19,50 | 2,23 | 25,00 | 12,44 | 13,20 |
| M12 x 1,75 ISO | 12175 | 1,00 - 3,00 | 3.0 | BLANK | 15,50 | 22,79 | 2,23 | 24,00 | 15,46 | 16,45 |
| M12 x 1,75 ISO | 12175 | 3,00 - 5,50 | 5.5 | 1-RAD | 15,50 | 22,79 | 2,23 | 26,50 | 15,46 | 16,45 |
| M12 x 1,75 ISO | 12175 | 5,50 - 8,00 | 8.0 | 2-RAD | 15,50 | 22,79 | 2,23 | 29,00 | 15,46 | 16,45 |

NOTE 1: Grip range can be affected by parent material density and actual hole size. AVK suggests trial installations to determine optimum grip.
 NOTE 2: Additional UNF and UNC threads are available. Contact us for details.
 NOTE 3: RN Series threads are not gaugeable after installation.
 NOTE 4: Additional grip sizes, materials, head styles and closed end versions are available by special order. Contact us for details.

PART NUMBERING SYSTEM



SAMPLE NUMBER: RNS3T-420-80

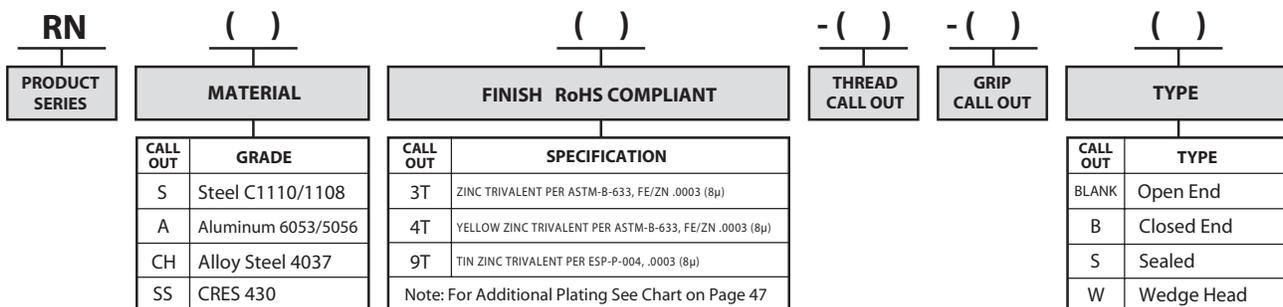

For air tool selection see page 36-37



E-L & E-H METRIC SERIES INSERT PROFILE




The **E-L & E-H Metric Series Insert** product line offers insert designs to accommodate "true metric" hole sizes. Closed end product and a variety of head configurations are also available. Please contact us for details.

(E-L) OPEN END TYPE

(E-L) HOLE DETAIL

(E-H) OPEN END TYPE

(E-H) HOLE DETAIL

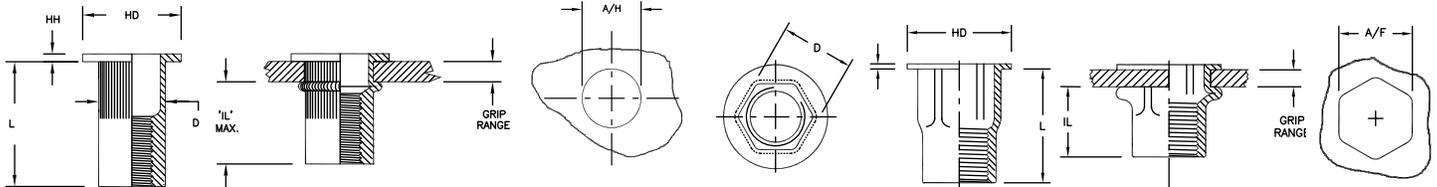

Thread Specifications: Metric 6H/21 per ASME B1.13M

METRIC THREAD SIZES



| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | A/H HOLE SIZE +0,15 / -0,00 | HD ±0,25 ±0,64* | HH ±0,08 | L ±0,38 | D MAX. | IL MAX. |
|---------------|-----------------|-------------|---------------|--------------------------------|-----------------------|-------------|------------|-----------|------------|
| M4 x 0,7 ISO | 470 | 0,50 - 3,00 | 3,0 | 6,0 | 9,0 | 1,0 | 10,3 | 6,0 | 5,8 |
| M5 x 0,8 ISO | 580 | 0,50 - 3,00 | 3,0 | 7,0 | 10,0 | 1,0 | 12,0 | 7,0 | 7,3 |
| M6 x 1,0 ISO | 610 | 0,50 - 3,00 | 3,0 | 9,0 | 13,0 | 1,5 | 13,0 | 9,0 | 8,0 |
| M6 x 1,0 ISO | 610 | 3,00 - 5,50 | 5,5 | 9,0 | 13,0 | 1,5 | 15,7 | 9,0 | 8,2 |
| M8 x 1,25 ISO | 8125 | 0,50 - 3,00 | 3,0 | 11,0 | 16,0* | 1,5 | 16,5 | 11,0 | 11,0 |
| M8 x 1,25 ISO | 8125 | 3,00 - 5,50 | 5,5 | 11,0 | 16,0* | 1,5 | 19,2 | 11,0 | 11,1 |
| M10 x 1,5 ISO | 1015 | 0,70 - 3,50 | 3,5 | 13,0 | 19,0* | 2,0 | 20,0 | 13,0 | 13,9 |




| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | A/F HOLE SIZE +0,15 / -0,00 | HD ±0,25 ±0,64* | HH ±0,08 | L ±0,38 | D MAX. | IL MAX. |
|---------------|-----------------|-------------|---------------|--------------------------------|-----------------------|-------------|------------|-----------|------------|
| M4 x 0,7 ISO | 470 | 0,50 - 3,00 | 3,0 | 6,0 | 9,0 | 1,0 | 10,3 | 6,0 | 5,8 |
| M5 x 0,8 ISO | 580 | 0,50 - 3,00 | 3,0 | 7,0 | 10,0 | 1,0 | 12,0 | 7,0 | 7,3 |
| M6 x 1,0 ISO | 610 | 0,50 - 3,00 | 3,0 | 9,0 | 13,0 | 1,5 | 13,0 | 9,0 | 8,0 |
| M6 x 1,0 ISO | 610 | 3,00 - 5,50 | 5,5 | 9,0 | 13,0 | 1,5 | 15,7 | 9,0 | 8,2 |
| M8 x 1,25 ISO | 8125 | 0,50 - 3,00 | 3,0 | 11,0 | 16,0* | 1,5 | 16,5 | 11,0 | 11,2 |
| M8 x 1,25 ISO | 8125 | 3,00 - 5,50 | 5,5 | 11,0 | 16,0* | 1,5 | 19,2 | 11,0 | 11,2 |

NOTE 1: Grip range can be affected by parent material density and actual hole size. AVK suggests trial installations to determine optimum grip.
NOTE 2: Closed End Type and special head configurations available. Contact us for details.

PART NUMBERING SYSTEM



SAMPLE NUMBER: ELS3T-610-3,0

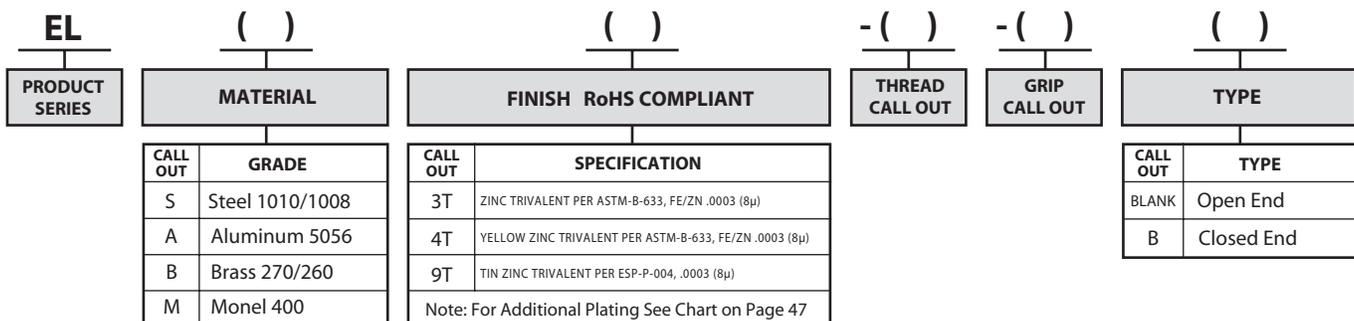

Note: Contact us for tool selection.




NEW PRODUCTS

GS SERIES INSERT



C-S SERIES INSERT - Patent No. 8,226,339 B2


AVK introduces a new high torque insert for the commercial and industrial markets. The new COMPOSI-SERT™ insert accommodates various grip thicknesses and can be used in a variety of structural materials. Available thread sizes: #10, 1/4, 5/16, M5, M6, M8.

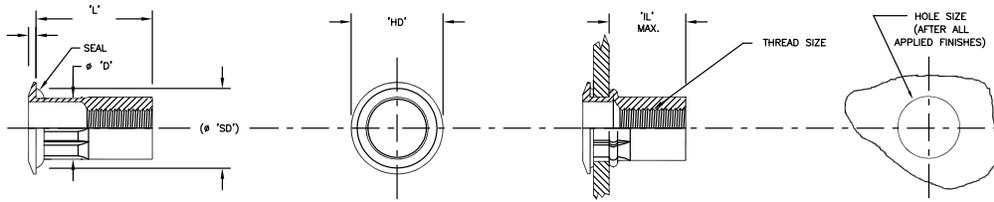

- Various Grip Ranges
- Increased Spin-Out performance over Standard Style Inserts and Rivetnuts.
- Multiple Panel Clamping Capabilities.
- Can be used on a Variety of Structural Materials (including Composite & SMC).
- AVK'S SPP Tool™ Systems or Stroke Tools can be used.
- Low Profile Head Style
- Sealed or Non-Sealed Designs

OPEN END TYPE

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | HOLE SIZE | HD | HH | L | IL MAX. | SD |
|-------------|-----------------|------------|---------------|-------------|-------------|-----------|-------------|---------|-------|
| M5X0.80 | 580 | 0.5-3.5 | 3.5 | 7.75-7.60 | 10.79-10.29 | 0.84-0.68 | 12.45-11.69 | 8.00 | 10.79 |
| M5X0.80 | 580 | 3.0-6.0 | 6.0 | 7.75-7.60 | 10.79-10.29 | 0.84-0.68 | 15.24-14.48 | 8.00 | |
| M5X0.80 | 580 | 5.0-8.0 | 8.0 | 7.75-7.60 | 10.79-10.29 | 0.84-0.68 | 18.03-17.27 | 8.00 | |
| M6X1.0 | 610 | 0.7-4.0 | 4.0 | 10.15-10.00 | 16.00-15.00 | 0.84-0.68 | 15.11-14.35 | 9.65 | 16.00 |
| M6X1.0 | 610 | 3.5-6.5 | 6.5 | 10.15-10.00 | 16.00-15.00 | 0.84-0.68 | 17.65-16.89 | 9.65 | |
| M6X1.0 | 610 | 6.0-9.0 | 9.0 | 10.15-10.00 | 16.00-15.00 | 0.84-0.68 | 20.83-20.07 | 9.65 | |
| M6X1.0 | 610 | 7.5-10.5 | 10.5 | 10.15-10.00 | 16.00-15.00 | 0.84-0.68 | 24.00-23.24 | 9.65 | 22.39 |
| M8X1.25 | 8125 | 0.7-3.8 | 3.8 | 13.65-13.50 | 22.39-21.15 | 0.97-0.81 | 17.91-17.15 | 11.94 | |
| M8X1.25 | 8125 | 2.5-5.5 | 5.5 | 13.65-13.50 | 22.39-21.15 | 0.97-0.81 | 20.83-20.07 | 10.80 | |
| M8X1.25 | 8125 | 5.0-8.0 | 8.0 | 13.65-13.50 | 22.39-21.15 | 0.97-0.81 | 25.91-25.15 | 13.97 | |
| M8X1.25 | 8125 | 7.5-10.5 | 10.5 | 13.65-13.50 | 22.39-21.15 | 0.97-0.81 | 28.91-28.15 | 13.97 | |

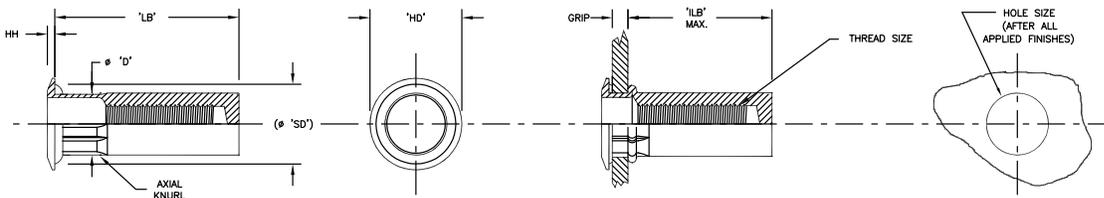


CLOSED END TYPE

| THREAD SIZE | THREAD CALL OUT | GRIP RANGE | GRIP CALL OUT | HOLE SIZE | HD | HH | LB MAX | ILB MAX. | SD |
|-------------|-----------------|------------|---------------|-------------|-------------|-----------|-------------|----------|-------|
| M5X0.80 | 580 | 0.5-3.5 | 3.5 | 7.75-7.60 | 10.16-9.66 | 0.84-0.68 | 28.53-27.77 | 22.00 | 10.79 |
| M5X0.80 | 580 | 3.0-6.0 | 6.0 | 7.75-7.60 | 10.79-10.29 | 0.84-0.68 | 28.53-27.77 | 22.00 | |
| M5X0.80 | 580 | 5.0-8.0 | 8.0 | 7.75-7.60 | 10.79-10.29 | 0.84-0.68 | 33.33-32.57 | 22.00 | |
| M6X1.0 | 610 | 0.7-4.0 | 4.0 | 10.15-10.00 | 16.00-15.00 | 0.84-0.68 | 30.61-29.85 | 25.53 | 16.00 |
| M6X1.0 | 610 | 3.5-6.5 | 6.5 | 10.15-10.00 | 16.00-15.00 | 0.84-0.68 | 30.61-29.85 | 22.99 | |
| M6X1.0 | 610 | 6.0-9.0 | 9.0 | 10.15-10.00 | 16.00-15.00 | 0.84-0.68 | 36.83-36.19 | 25.53 | |
| M6X1.0 | 610 | 8.5-11.5 | 11.5 | 10.15-10.00 | 16.00-15.00 | 0.84-0.68 | 36.83-36.19 | 22.99 | 22.39 |
| M8X1.25 | 8125 | 0.7-3.8 | 3.8 | 13.65-13.50 | 22.39-21.15 | 0.97-0.81 | 35.69-34.93 | 29.85 | |
| M8X1.25 | 8125 | 2.5-5.5 | 5.5 | 13.65-13.50 | 22.39-21.15 | 0.97-0.81 | 35.69-34.93 | 26.04 | |
| M8X1.25 | 8125 | 5.0-8.0 | 8.0 | 13.65-13.50 | 22.39-21.15 | 0.97-0.81 | 41.66-40.89 | 29.85 | |
| M8X1.25 | 8125 | 7.5-10.5 | 10.5 | 13.65-13.50 | 22.39-21.15 | 0.97-0.81 | 41.66-40.89 | 26.04 | |

PART NUMBERING SYSTEM

SAMPLE NUMBER: CSS4T-610-6.5

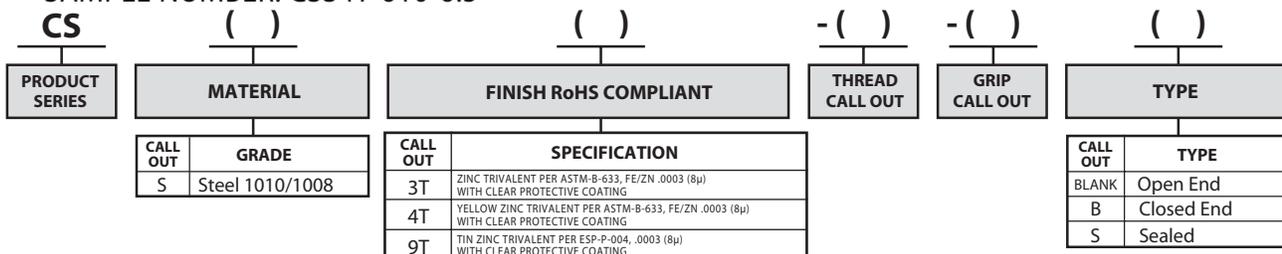




C-L SERIES COMPRESSION LIMITER

NEW PRODUCTS



COMPRESSION

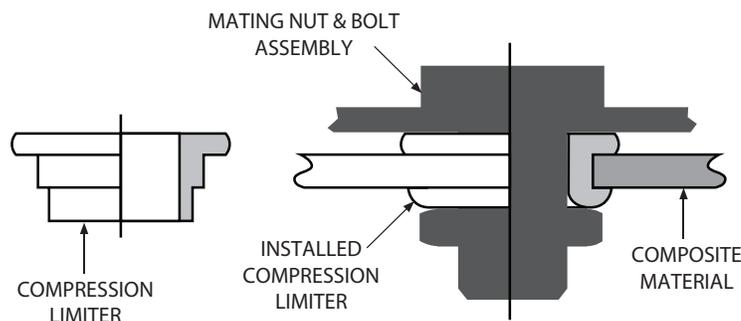

- Compensation for Expansion & Contraction of Composite Material.
- Maintain Joint Stability.
- Protect Composite Material from Damage.
- Reduce Rework from Cracked Assemblies.
- Creates Clean Holes with Alignment Points.
- Reduce Assembly Rejection and Maintain Production Through-Put.
- Excellent for Automotive and Truck Composite Modular Assemblies.



Compression limiters are utilized daily in applications where a compressive load is applied to a composite assembly. The compression limiter distributes and transfers clamp load when the mating bolt or screw is installed into a composite assembly. This distribution of clamp load prevents damage to your assembly and compensates for expansion and contraction of the composite substraight. Thus, the compression limiter will provide consistent joint integrity allowing your joint assembly to remain tight.

Compression limiters are designed specifically for customer's requirements. Simply call us and provide your requirements.



AVK PNEUMATIC TOOLS PROFILE

AVK has selected the **ARO Brand Pneumatic Tool** for its ergonomic design and outstanding dependability. The rocker style forward and reverse trigger is easy and comfortable to use.

The AVK pneumatic tool features a Quick-Change thread adaption kit. This patented* feature allows for easy access to the thread size component parts. AVK's Pneumatic tools provide the highest RPM for the thread size selected resulting in optimum installation speed.



THREAD ADAPTION KIT



*Patent No. 4,121,444

HOW THE AVK TOOL WORKS

- The operator quarter turns an AVK threaded insert onto the tool mandrel and places it into the hole in the parent material.
- The top trigger is depressed and the tool mandrel spins into the insert.
- The head of the threaded insert is gripped by the knurling at the nose piece preventing it from spinning as the threaded area of the insert "walks" up the mandrel.
- As this occurs, the AVK insert expands within the hole wall providing hole fill and then forms a secondary flange against the backside of the parent material.
- The tool continues to torque the insert's threads causing the knurling to bite into the backside edge of the parent material.
- The tool then stalls when it reaches its predetermined stall torque. This occurs even if the parent material varies in thickness. The tool needs no adjustment to install AVK's products in variable thickness materials.
- The operator then presses the lower reverse trigger and the mandrel spins out of the installed part.

DESIGN BENEFITS

- The AVK ARO tool uses torque to install the AVK product. It needs no adjustment to install the product in variable thickness material.
- The ergonomic design of the AVK ARO tool makes it feel comfortable to the operator and weighs in at 3 lbs. (1.36 kg).
- The rocker style trigger is easy to use & minimizes operator fatigue.
- The knurled nose assembly eliminates any torque "kick" during installation.
- Preventative maintenance is quick and easy with AVK's patented* quick-change thread adaption kit. No tools are required.
- The rugged design of the tool casing, its components and the AVK thread adaption kit provides you with reliability.

ADDITIONAL DESIGN TYPES

SPECIAL DESIGNS

AVK can design a thread adaption kit nose assembly to fit your particular application needs.



RIGHT ANGLE DESIGN

The Right Angle Inline Style Tool is designed for limited access applications.



INLINE DESIGN

The Inline Style Tool is designed for vertical installations.




HEAD FORMING THREAD ADAPTION KIT

A Head Forming T.A.K. is available to contour the AVK insert's head to the radius of a tube to increase torque capability.





AVK PNEUMATIC TOOL SPECIFICATIONS

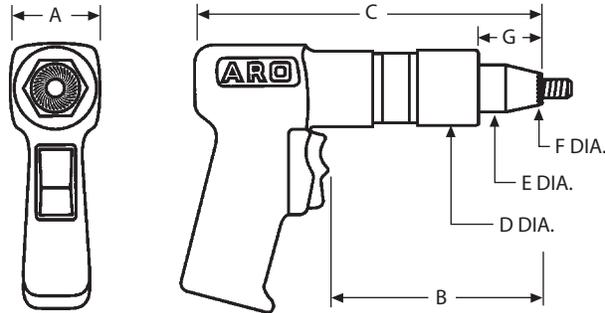

The tool shown on this page has been specifically designed to install the A-L, A-K, A-H, A-P and A-O Series Inserts.

Once you have selected the type of insert and thread size required for your application, select the appropriate RPM tool from the chart below.


DIMENSIONAL DATA / TOOL SET-UP REQUIREMENTS

| RPM | WEIGHT LBS. (Kg) | A | B | C | D DIA. | E DIA. | F DIA. MAX. | G |
|-------|------------------|--------------|--------------|--------------|--------------|--------------|--------------|------------|
| 3,000 | 2.55 (1.15) | 1.86 (47,24) | 4.75 (120,6) | 7.75 (196,8) | 1.57 (39,87) | 1.00 (25,40) | .400 (10,16) | 1.3 (33,0) |
| 1,500 | 2.58 (1.17) | 1.86 (47,24) | 4.75 (120,6) | 7.75 (196,8) | 1.57 (39,87) | 1.00 (25,40) | .400 (10,16) | 1.3 (33,0) |
| 900 | 3.18 (1.44) | 1.86 (47,24) | 6.00 (152,4) | 9.00 (228,6) | 1.57 (39,87) | 1.00 (25,40) | .500 (12,7) | 1.3 (33,0) |
| 600 | 3.18 (1.44) | 1.86 (47,24) | 6.00 (152,4) | 9.00 (228,6) | 1.57 (39,87) | 1.00 (25,40) | .640 (16,25) | 1.3 (33,0) |
| 350 | 3.25 (1.46) | 1.86 (47,24) | 5.37 (136,3) | 8.37 (212,5) | 1.50 (38,10) | 1.42 (36,06) | .900 (22,86) | NA (NA) |

PROPER AIR SUPPLY SET-UP REQUIRES:

- 90-110 PSI (6.2-7.5 BARS) dynamic (tool running) air pressure at 25 S.C.F.M.
- Inline oiler/separator
- Air pressure gauge and regulator
- 5/16 or 7/92 mm minimum hose ID
- 5/16 or 7/92 mm minimum fittings ID

SPECIAL FEATURE—The AKPT nose cone design incorporates a special pilot/serrated tip that is essential to proper insert installation. The "A-K" prefix in the tool part number designates this feature

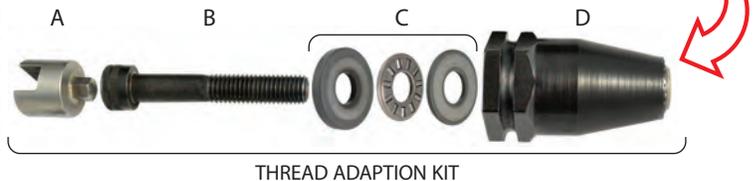

AIR TOOL SELECTION / SPARE PARTS

| THREAD SIZE | TOOL R.P.M | COMPLETE TOOL PART NUMBER | THREAD ADAPTION KIT | A HEX DRIVE | B MANDREL 10 PER BAG | C BEARING SET | D NOSE CONE | DYNAMIC AIR PRESSURE SETTINGS PSI - BARS |
|----------------|------------|---------------------------|---------------------|-------------|----------------------|---------------|-------------|--|
| 6-32 UNC | 3000 | AKPT30P632 | AKPT632TAK | 29NPT22 | B3SH632-1500 | 32PT1 | 77AKPT6 | 70 - 80 |
| 8-32 UNC | 3000 | AKPT30P832 | AKPT832TAK | 29NPT23 | B3SH832-1500 | 32PT2 | 77AKPT8 | 75 - 90 |
| 10-24 UNC | 1500 | AKPT15P1024 | AKPT1024TAK | 29NPT4 | B3SH1024-1750 | 32PT4 | 77AKPT10 | 60 - 80 |
| 10-32 UNF | 1500 | AKPT15P1032 | AKPT1032TAK | 29NPT4 | B3SH1032-1750 | 32PT4 | 77AKPT10 | 60 - 80 |
| 1/4-20 UNC | 900 | AKPT9P420 | AKPT420TAK | 29NPT5 | B3SH420-1500 | 32PT5 | 77AKPT250 | 70 - 90 |
| 5/16-18 UNC | 600 | AKPT6P518 | AKPT518TAK | 29NPT6 | B3SH518-2250 | 32PT7 | 77AKPT3125 | 80 - 110 |
| 3/8-16 UNC | 600 | AKPT6P616 | AKPT616TAK | 29NPT7 | B3SH616-2250 | 32PT8 | 77AKPT375 | 80 - 110 |
| 1/2-13 UNC | 350 | AKPT3P813 | AKPT813CTA | 29NPT26 | B3SH813-2500 | 30NPT500 | 77AKPT500 | 80 - 110 |
| M4 x 0,7 ISO | 3000 | AKPT30P470 | AKPT470TAK | 29NPT24 | B3SH470-40 | 32PT3 | 77AKPT470 | 4.8 - 5.5 |
| M5 x 0,8 ISO | 1500 | AKPT15P580 | AKPT580TAK | 29NPT10 | B3SH580-45 | 32PT4 | 77AKPT580 | 4.1 - 5.5 |
| M6 x 1,0 ISO | 900 | AKPT9P610 | AKPT610TAK | 29NPT11 | B3SH610-40 | 32PT6 | 77AKPT610 | 4.8 - 6.2 |
| M8 x 1,25 ISO | 600 | AKPT6P8125 | AKPT8125TAK | 29NPT12 | B3SH8125-55 | 32PT7 | 77AKPT8125 | 5.5 - 7.5 |
| M10 x 1,50 ISO | 600 | AKPT6P1015 | AKPT1015TAK | 29NPT25 | B3SH1015-55 | 32PT10 | 77AKPT1015 | 5.5 - 7.5 |
| M12 x 1,75 ISO | 350 | AKPT3P12175 | AKPT12175CTA | 29NPT27 | B3SH12175-60 | 30NPT500 | 77AKPT12175 | 5.5 - 7.5 |

This chart designates the tool, spare parts and dynamic (tool running) air pressure requirements for our most popular steel product. Consult the AVK tool catalog or contact us for tool RPM and air pressure settings for aluminum, brass and monel product.

NOTE: UNF FINE THREAD COMPONENTS ARE AVAILABLE.

PREVENTATIVE MAINTENANCE REQUIREMENTS:


- The bearing set must be kept in a WET lubricated condition to assure proper tool operation. AVK suggests the use of high temperature grease such as LUBRIPLATE® BRAND 930 AA.
- The tool mandrel should be inspected for thread wear or damage and replaced. To test the condition of the mandrel, thread an AVK insert onto the mandrel backwards until it touches the pilot. If any drag is still felt, replace the mandrel with a new socket head cap screw.



AVK PNEUMATIC TOOL SPECIFICATIONS

The tool shown on this page has been specifically designed to install the A-T, A-W, Series Inserts.

Once you have selected the type of insert and thread size required for your application, select the appropriate RPM tool from the chart below.

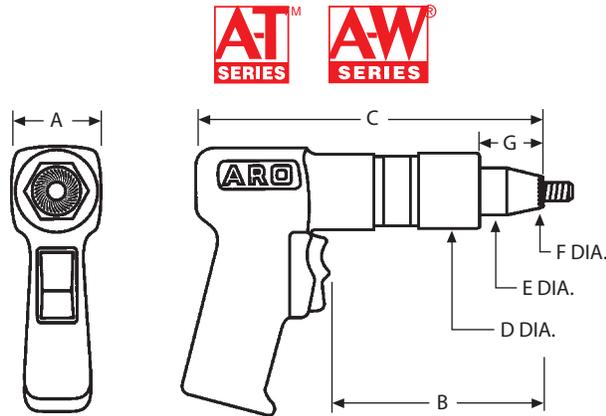


DIMENSIONAL DATA / TOOL SET-UP REQUIREMENTS

PROPER AIR SUPPLY SET-UP REQUIRES:

- 90-110 PSI (6.2-7.5 BARS) dynamic (tool running) air pressure at 25 S.C.F.M.
- Inline oiler/separator
- Air pressure gauge and regulator
- 5/16 or 7,92 mm minimum hose ID
- 5/16 or 7,92 mm minimum fittings ID

| RPM | WEIGHT LBS. (Kg) | A | B | C | D DIA. | E DIA. | F DIA. MAX. | G |
|-------|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| 3,000 | 2.55 (1.15) | 1.86 (47,24) | 4.75 (120,6) | 7.75 (196,8) | 1.57 (39,87) | 1.00 (25,40) | .350 (8,89) | 1.3 (33,0) |
| | 1,500 | 2.58 (1.17) | 1.86 (47,24) | 4.75 (120,6) | 7.75 (196,8) | 1.57 (39,87) | 1.00 (25,40) | .600 (15,24) |
| 600 | 3.18 (1.44) | 1.86 (47,24) | 6.00 (152,4) | 9.00 (228,6) | 1.57 (39,87) | 1.00 (25,40) | .625 (15,87) | 1.3 (33,0) |
| | 350 | 3.25 (1.46) | 1.86 (47,24) | 6.00 (152,4) | 8.37 (212,5) | 1.50 (38,10) | 1.43 (36,32) | .900 (22,86) |

SPECIAL FEATURE—The NPT nose cone design incorporates a special serrated tip that is essential to proper insert installation. The "N" prefix in the tool part no. designates this feature.

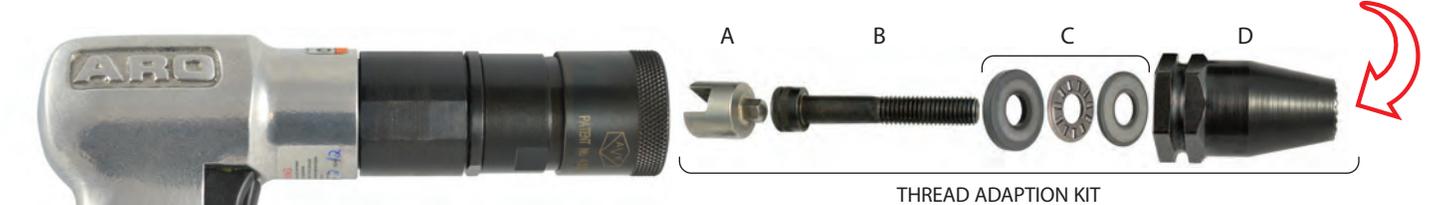

AIR TOOL SELECTION / SPARE PARTS



| THREAD SIZE | TOOL R.P.M | COMPLETE TOOL PART NUMBER | THREAD ADAPTION KIT | A HEX DRIVE | B MANDREL 10 PER BAG | C BEARING SET | D NOSE CONE | DYNAMIC AIR PRESSURE SETTINGS PSI - BARS |
|----------------|------------|---------------------------|---------------------|-------------|----------------------|---------------|-------------|--|
| 4-40 UNC | 3000 | NPT30P440 | NPT440TAK | 29NPT1 | B3SH400-750 | 30NPT4 | 77NPT4 | 36 - 40 |
| 6-32 UNC | 3000 | NPT30P632 | NPT632TAK | 29NPT2 | B3SH632-875 | 30NPT6 | 77NPT6 | 70 - 80 |
| 8-32 UNC | 3000 | NPT30P832 | NPT832TAK | 29NPT3 | B3SH832-875 | 30NPT8 | 77NPT8 | 60 - 85 |
| 10-24 UNC | 1500 | NPT15P1024 | NPT1024TAK | 29NPT4 | B3SH1024-1500 | 30NPT10 | 77NPT10 | 60 - 85 |
| 10-32 UNF | 1500 | NPT15P1032 | NPT1032TAK | 29NPT4 | B3SH1032-1500 | 30NPT10 | 77NPT10 | 60 - 85 |
| 1/4-20 UNC | 1500 | NPT15P420 | NPT420TAK | 29NPT5 | B3SH420-1250 | 30NPT250 | 77NPT250 | 70 - 95 |
| 5/16-18 UNC | 600 | NPT6P518 | NPT518TAK | 29NPT6 | B3SH518-1750 | 30NPT3125 | 77NPT3125 | 80 - 100 |
| 3/8-16 UNC | 600 | NPT6P616 | NPT616TAK | 29NPT7 | B3SH616-1750 | 30NPT375 | 77NPT375 | 90 - 110 |
| 1/2-13 UNC | 350 | NPT3P813 | NPT813CTA | 29NPT26 | B3SH813-2000 | 30NPT500 | 77NPT500 | 95 - 110 |
| M3 x 0,5 ISO | 3000 | NPT30P350 | NPT350TAK | 29NPT8 | B3SH350-20 | 30NPTM3 | 77NPTM3 | 2.4 - 2.7 |
| M4 x 0,7 ISO | 3000 | NPT30P470 | NPT470TAK | 29NPT9 | B3SH470-20 | 30NPTM4 | 77NPTM4 | 4.1 - 5.5 |
| M5 x 0,8 ISO | 1500 | NPT15P580 | NPT580TAK | 29NPT10 | B3SH580-40 | 30NPTM5 | 77NPTM5 | 4.1 - 5.5 |
| M6 x 1,0 ISO | 1500 | NPT15P610 | NPT610TAK | 29NPT11 | B3SH610-35 | 30NPTM6 | 77NPTM6 | 4.8 - 6.5 |
| M8 x 1,25 ISO | 600 | NPT6P8125 | NPT8125TAK | 29NPT12 | B3SH8125-45 | 30NPTM8 | 77NPTM8 | 5.5 - 6.8 |
| M10 x 1,50 ISO | 600 | NPT6P1015 | NPT1015TAK | 29NPT25 | B3SH1015-45 | 32PT10 | 77NPT1015 | 6.2 - 7.5 |
| M12 x 1,75 ISO | 350 | NPT3P12175 | NPT12175CTA | 29NPT27 | B3SH12175-50 | 30NPT500 | 77NPTM12 | 6.2 - 7.5 |

This chart designates the tool, spare parts and dynamic (tool running) air pressure requirements for our most popular steel product. Consult the AVK tool catalog or contact us for tool RPM and air pressure settings for aluminum, brass and stainless product.


NOTE: UNF FINE THREAD COMPONENTS ARE AVAILABLE.

PREVENTATIVE MAINTENANCE REQUIREMENTS:

- The bearing set must be kept in a WET lubricated condition to assure proper tool operation. AVK suggests the use of high temperature grease such as LUBRIPLATE® BRAND 930 AA.
- The tool mandrel should be inspected for thread wear or damage and replaced. To test the condition of the mandrel, thread an AVK insert onto the mandrel backwards until it touches the knurled nose cone. If any drag is still felt, replace the mandrel with a new socket head cap screw.



AVK PNEUMATIC TOOL SPECIFICATIONS

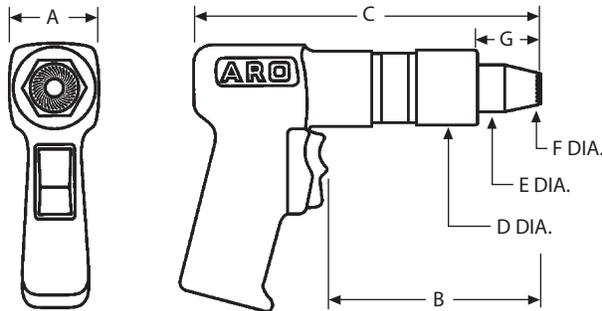

The tool shown on this page has been specifically designed to install the A-S Series Stud.

Once you have selected the type of stud and thread size required for your application, refer to the chart below for air tool selection.

DIMENSIONAL DATA / TOOL SET-UP REQUIREMENTS

| RPM | WEIGHT LBS. (Kg) | A | B | C | D DIA. | E DIA. | F DIA. MAX. | G |
|-------|------------------|--------------|--------------|---------------|--------------|--------------|--------------|------------|
| 3,000 | 2.55 (1.15) | 1.86 (47,24) | 4.75 (120,6) | 7.75 (196,85) | 1.57 (39,87) | 1.00 (25,40) | .400 (10,16) | 1.3 (33,0) |
| 1,500 | 2.58 (1.17) | 1.86 (47,24) | 4.75 (120,6) | 7.75 (196,85) | 1.57 (39,87) | 1.00 (25,40) | .400 (10,16) | 1.3 (33,0) |
| 900 | 3.18 (1.44) | 1.86 (47,24) | 6.00 (152,4) | 9.00 (228,6) | 1.57 (39,87) | 1.00 (25,40) | .500 (12,7) | 1.3 (33,0) |
| 600 | 3.18 (1.44) | 1.86 (47,24) | 6.00 (152,4) | 8.37 (212,6) | 1.57 (39,87) | 1.00 (25,40) | .640 (16,25) | 1.3 (33,0) |

PROPER AIR SUPPLY SET-UP REQUIRES:

- 90-110 PSI (6.2-7.5 BARS) dynamic (tool running) air pressure at 25 S.C.F.M.
- Inline oiler/separator
- Air pressure gauge and regulator
- 5/16 or 7,92 mm minimum hose ID
- 5/16 or 7,92 mm minimum fittings ID

SPECIAL FEATURE—This tool nose cone design incorporates a special serrated tip that is essential to proper installation.



THREAD ADAPTION KIT

AIR TOOL SELECTION / SPARE PARTS

| THREAD SIZE | TOOL R.P.M | COMPLETE TOOL PART NUMBER | THREAD ADAPTION KIT | A THREAD DRIVE | C BEARING SET | D NOSE CONE | DYNAMIC AIR PRESSURE SETTINGS PSI - BARS |
|----------------|------------|---------------------------|---------------------|----------------|---------------|-------------|--|
| 6-32 UNC | 3000 | ASPT30P632 | ASPT632TAK | 29ASPT632 | 32PT5 | 77ASPT8 | 70 - 80 |
| 8-32 UNC | 3000 | ASPT30P832 | ASPT832TAK | 29ASPT832 | 32PT5 | 77ASPT8 | 75 - 90 |
| 10-24 UNC | 1500 | ASPT15P1024 | ASPT1024TAK | 29ASPT1024 | 32PT12 | 77ASPT10 | 60 - 80 |
| 10-32 UNF | 1500 | ASPT15P1032 | ASPT1032TAK | 29ASPT1032 | 32PT12 | 77ASPT10 | 60 - 80 |
| 1/4-20 UNC | 900 | ASPT9P420 | ASPT420TAK | 29ASPT420 | 32PT8 | 77ASPT4 | 70 - 90 |
| 5/16-18 UNC | 600 | ASPT6P518 | ASPT518CTA | 29ASPT518 | 30NPT500 | 77ASPT8125 | 80 - 110 |
| 3/8-16 UNC | 600 | ASPT6P616 | ASPT616CTA | 29ASPT616 | 30NPT500 | 77ASPT8125 | 80 - 110 |
| M4 x 0,7 ISO | 3000 | ASPT30P470 | ASPT470TAK | 29ASPT470 | 32PT5 | 77ASPT8 | 4.8 - 5.5 |
| M5 x 0,8 ISO | 1500 | ASPT15P580 | ASPT580TAK | 29ASPT580 | 32PT12 | 77ASPT10 | 4.1 - 5.5 |
| M6 x 1,0 ISO | 900 | ASPT9P610 | ASPT610TAK | 29ASPT610 | 32PT8 | 77ASPT4 | 5.5 - 6.2 |
| M8 x 1,25 ISO | 600 | ASPT6P8125 | ASPT8125CTA | 29ASPT8125 | 30NPT500 | 77ASPT8125 | 5.5 - 7.5 |
| M10 x 1,50 ISO | 600 | ASPT6P1015 | ASPT1015CTA | 29ASPT1015 | 30NPT500 | 77ASPT8125 | 5.5 - 7.5 |


NOTE: Air pressure settings are specified dynamic (tool running).

PREVENTATIVE MAINTENANCE REQUIREMENTS:

- The bearing set must be kept in a WET lubricated condition to assure proper tool operation. AVK suggests the use of high temperature grease such as LUBRIPLATE® BRAND 930 AA.



AVK PNEUMATIC TOOL SPECIFICATIONS

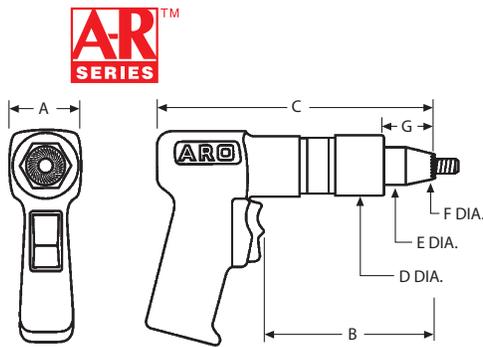

The tool shown on this page has been specifically designed to install the A-R Series Inserts.

AVK recommends that trial installations be performed to determine the optimum tool for the fastener selected using actual application materials and hole sizes. Tool RPM and parent material density will affect the grip range of the fastener. See the chart below for guidelines.


DIMENSIONAL DATA / TOOL SET-UP REQUIREMENTS

PROPER AIR SUPPLY SET-UP REQUIRES:

- 90-110 PSI (6.2-7.5 BARS) dynamic (tool running) air pressure at 25 S.C.F.M.
- Inline oiler/separator
- Air pressure gauge and regulator
- 5/16 or 7,92 mm minimum hose ID
- 5/16 or 7,92 mm minimum fittings ID

| RPM | WEIGHT LBS. (Kg) | A | B | C | D DIA. | E DIA. | F DIA. MAX. | G |
|-------|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| 1,500 | 2.58 (1.17) | 1.86 (47,24) | 4.75 (120,6) | 7.75 (196,8) | 1.57 (39,87) | 1.00 (25,40) | .400 (10,16) | 1.3 (33,0) |
| | 900 | 3.18 (1.44) | 1.86 (47,24) | 6.00 (152,4) | 9.00 (228,6) | 1.57 (39,87) | 1.00 (25,40) | .500 (12,70) |

SPECIAL FEATURE—The NPT nose cone design incorporates a special serrated tip that is essential to proper insert installation. The "N" prefix in the tool part number designates this feature.

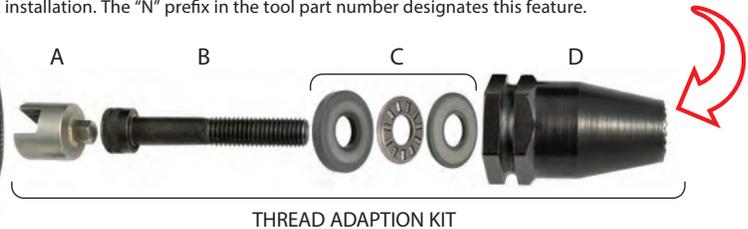

AIR TOOL SELECTION / SPARE PARTS

| AVK PART NUMBER | TOOL R.P.M | PARENT MATERIAL | | COMPLETE TOOL PART NUMBER | THREAD ADAPTION KIT | A HEX DRIVE | B SCREW MANDREL | C BEARING SET | D NOSE CONE | DYNAMIC AIR PRESSURE SETTINGS PSI - BARS | |
|-----------------|------------|--------------------------------|--------------------------------|---------------------------|---------------------|-------------|-----------------|---------------|-------------|--|--------|
| | | STEEL, ALUMINUM FIBERGLASS SML | BLOW, ROTATIONAL SOFT PLASTICS | | | | | | | | |
| | | GRIP RANGE | GRIP RANGE | | | | | | | | |
| ARS4T-420-280 | 1500 | .020 - .190 | .020 - .250 | ARPT15P420-280 | ARPT420-280TAK | 29NPT5 | 3SH420-2000 | 32PT5 | 77NPT250 | 60 - 70 | |
| | 900 | .020 - .250 | .020 - .250 | ARPT9P420-280 | | | | | | 40 - 60 | |
| ARS4T-420-500 | 1500 | .250 - .430 | .250 - .470 | ARPT15P420-500 | ARPT420-500TAK | 29NPT5 | 3SH420-2250 | 32PT5 | 77NPT250 | 60 - 70 | |
| | 900 | .250 - .470 | .250 - .470 | ARPT9P420-500 | | | | | | 40 - 60 | |
| ARS4T-518-280 | 900 | .020 - .260 | - | ARPT9P518-280 | ARPT518-280TAK | 29NPT6 | 3SH518-2500 | 32PT12 | 77NPT3125 | 70 - 90 | |
| | - | - | - | - | | | | | | - | |
| ARS4T-518-500 | 900 | .280 - .480 | - | ARPT9P518-500 | ARPT518-500TAK | 29NPT6 | 3SH518-2750 | 32PT12 | 77NPT3125 | 70 - 90 | |
| | - | - | - | - | | | | | | - | |
| ARS4T-616-280 | 600 | .020 - .260 | - | ARPT6P616-280 | ARPT616-280TAK | 29NPT7 | 3SH616-2500 | 32PT8 | 77NPT375 | 70 - 90 | |
| | 600 | .280-480 | - | ARPT6P616-500 | | | | | | ARPT616-500TAK | 29NPT7 |
| ARS4T-610-7.1 | 1500 | 0.5 - 4.8 | 0.5 - 6.3 | ARPT15P610-7.1 | ARPT610-7.1TAK | 29NPT11 | 3SH610-50 | 32PT6 | 77NPTM6 | 4.1 - 4.8 | |
| | 900 | 0.5 - 6.3 | 0.5 - 6.3 | ARPT9P610-7.1 | | | | | | 2.8 - 4.1 | |
| ARS4T-610-12.7 | 1500 | 6.3 - 10.9 | 6.3 - 11.9 | ARPT15P610-12.7 | ARPT610-12.7TAK | 29NPT11 | 3SH610-55 | 32PT6 | 77NPTM6 | 4.1 - 4.8 | |
| | 900 | 6.3 - 11.9 | 6.3 - 11.9 | ARPT9P610-12.7 | | | | | | 2.8 - 4.1 | |
| ARS4T-8125-7.1 | 900 | 0.5 - 6.6 | 0.5 - 6.6 | ARPT9P8125-7.1 | ARPT8125-7.1TAK | 29NPT12 | 3SH8125-60 | 32PT7 | 77NPTM8 | 4.8 - 6.2 | |
| | - | - | - | - | | | | | | - | |
| ARS4T-8125-12.7 | 900 | 7,1 - 12,2 | - | ARPT9P8125-12.7 | ARPT8125-12.7TAK | 29NPT12 | 3SH8125-65 | 32PT7 | 77NPTM8 | 4.8 - 6.2 | |
| | - | - | - | - | | | | | | - | |
| ARS4T-1015-7.1 | 600 | 0.5 - 6.6 | - | ARPT6P1015-7.1 | ARPT1015-7.1TAK | 29NPT25 | 3SH1015-60 | 32PT10 | 77NPT1015 | 4.8 - 6.2 | |
| | - | - | - | - | | | | | | - | |
| ARS4T-1015-12.7 | 600 | 7,1-12,2 | - | ARPT6P1015-12.7 | - | - | 3SH1015-65 | - | - | - | |

NOTE: UNF FINE THREAD COMPONENTS ARE AVAILABLE.

PREVENTATIVE MAINTENANCE REQUIREMENTS:

- The bearing set must be kept in a WET lubricated condition to assure proper tool operation. AVK suggests the use of high temperature grease such as LUBRIPLATE® BRAND 930 AA.
- The tool mandrel should be inspected for thread wear or damage and replaced. To test the condition of the mandrel, thread an AVK insert onto the mandrel backwards until it touches the pilot. If any drag is still felt, replace the mandrel with a new socket head cap screw.



AVK OST™ PNEUMATIC RAPID INSERT TOOL - AVK5500

Time is money; and to reduce your installation cost with a rapid sure shot installation tool, AVK is pleased to introduce the AVK One-Set™ Tool (OST™) insert installation system. Our OST™ is a multi-stroke and pull to pressure insert tool designed to meet any installation criteria.

OST™ is a light weight 5.3 pound ergonomic installation tool allowing you to select your Placement Method, Stroke or Pressure. Combined with a push to start threading system, and single trigger installation, this tool will offer a new standard in fast and easy insert installation for your product assembly.



AIR TOOL SELECTION / SPARE PARTS

| AVK5500 THREAD CONVERSION KITS | | | | | |
|--------------------------------|--|-------------------------|-------------------|---------------------------|---------------------|
| THREAD SIZE | AL, AK, AH, AO STANDARD CONVERSION KIT | AT*, RN* CONVERSION KIT | MANDREL | AL, AK, AH, AO NOSE PIECE | AT*, RN* NOSE PIECE |
| 6-32 UNC | 5500-AL632TAK | 5500-RN632TAK | 18AVK5500-AL632 | 77AVK5500-AL632 | 77AVK5500-RN632 |
| 8-32 UNC | 5500-AL832TAK | 5500-RN832TAK | 18AVK5500-AL832 | 77AVK5500-AL832 | 77AVK5500-RN832 |
| 10-24 UNC | 5500-AL1024TAK | 5500-RN1024TAK | 18AVK5500-AL1024 | 77AVK5500-AL1024 | 77AVK5500-RN1024 |
| 10-32 UNF | 5500-AL1032TAK | 5500-RN1032TAK | 18AVK5500-AL1032 | 77AVK5500-AL1032 | 77AVK5500-RN1032 |
| 1/4-20 UNC | 5500-AL420TAK | 5500-RN420TAK | 18AVK5500-AL420 | 77AVK5500-AL420 | 77AVK5500-RN420 |
| 1/4-28 UNF | 5500-AL428TAK | 5500-RN428TAK | 18AVK5500-AL428 | 77AVK5500-AL428 | 77AVK5500-RN428 |
| 5/16-18 UNC | 5500-AL518TAK | 5500-RN518TAK | 18AVK5500-AL518 | 77AVK5500-AL518 | 77AVK5500-RN518 |
| 5/16-24 UNC | 5500-AL524TAK | 5500-RN524TAK | 18AVK5500-AL524 | 77AVK5500-AL524 | 77AVK5500-RN524 |
| 3/8-16 UNC | 5500-AL616TAK | 5500-RN616TAK | 18AVK5500-AL616 | 77AVK5500-AL616 | 77AVK5500-RN616 |
| 3/8-24 UNF | 5500-AL624TAK | 5500-RN624TAK | 18AVK5500-AL624 | 77AVK5500-AL624 | 77AVK5500-RN624 |
| 1/2-13 UNC | 5500-AL813TAK | See Note Below* | 18AVK5500-AL813 | 77AVK5500-AL813 | See Note Below* |
| M4 x 0,7 ISO | 5500-AL470TAK | 5500-RN470TAK | 18AVK5500-AL470 | 77AVK5500-AL470 | 77AVK5500-RN470 |
| M5 x 0,8 ISO | 5500-AL580TAK | 5500-RN580TAK | 18AVK5500-AL580 | 77AVK5500-AL580 | 77AVK5500-RN580 |
| M6 x 1,0 ISO | 5500-AL610TAK | 5500-RN610TAK | 18AVK5500-AL610 | 77AVK5500-AL610 | 77AVK5500-RN610 |
| M8 x 1,25 ISO | 5500-AL8125TAK | 5500-RN8125TAK | 18AVK5500-AL8125 | 77AVK5500-AL8125 | 77AVK5500-RN8125 |
| M10 x 1,50 ISO | 5500-AL1015TAK | 5500-RN1015TAK | 18AVK5500-AL1015 | 77AVK5500-AL1015 | 77AVK5500-RN1015 |
| M12 x 1,75 ISO | 5500-AL12175TAK | See Note Below* | 18AVK5500-AL12175 | 77AVK5500-AL12175 | See Note Below* |

FEATURES

- Dual Installation system - Traction (Pull to Pressure) & Stroke (Set stroke length).
- 5.7 Bars or 82 PSI air pressure requirement.
- Will set M3-M12 and 6-32 to 1/2-13 inserts*.
- Ergonomic, light weight and well balanced at 2.4kg or 5.3 pounds.
- Durable impact resistance composite body reinforced with steel frame.
- Automatic insert mandrel feed by depressing the insert onto the mandrel.
- Single trigger installation sequence.
- And of course, rapid insert installation by way of our 10mm/.390 stroke.

PART NUMBERING SYSTEM
SAMPLE NUMBER: AVK5500-AL420

AVK5500- () () ()

BASE TOOL PART NO. **STYLE:** AL or RN **THREAD SIZE:** Example 420 **TYPE:** Blank = Standard Conversion Kit

*Note: AVK's One-Set™ Tool will not set the RN or AT Series in the 1/2-13 and M12 x 1,75 sizes.

NEW SPP2 TOOL™ SYSTEM INTRODUCTION



The New Modularized **SPP2 Tool™ System** has been designed exclusively to install AVK's complete line of blind installed fasteners. The term SPP2 Tool™ stands for Spin Pull to Pressure. The SPP2 Tool™ spins into the AVK fastener, automatically pulling the fasteners into a proper installation utilizing pressure as the upset control method. Pulling to pressure insures the AVK fastener will be installed correctly into single, multiple or variable thickness materials without adjustment.

THE TOOL SYSTEM FEATURES

- The Power Pack contains the air over hydraulic power system. The Power Pack is capable of providing 7,500 lbs. of pulling force enabling the tool to install any AVK product in any thread size up to 1/2" and M12. Combined with a NEW Pneumatic-Hydraulic Boost System providing a 15% to 20% faster cycle time for rapid installation.
- The all new SPP2 Tool™ comes furnished with attached tool hangers, casters and durable air and hydraulic quick release fittings allowing the operator to pull the unit along the work floor.
- The Power Pack can be adjusted to pull any AVK fastener with the simple adjustment of an air pressure regulator. Our new robust design features a see through glass hydraulic fluid reservoir for visual inspection of the hydraulic fluid level, enabling quick and easy adjustments.
- The SPP2 Tool™ is lightweight and ergonomically designed. It features a rocker style trigger and a high speed motor that provides the quickest spin-in / spin-out of any tool on the market. The tool also has a patented quick release thread adaptation kit that makes thread size changes quick and easy with no wrenches required.



NEW SPP3 TOOL™ DATA MASTER

- AVK is committed to superior quality, reducing rework cost, and providing optimal joint integrity for our customer's assemblies. With joint integrity in mind, AVK is pleased to introduce our SPP3 Tool™ Data Master PLC Linked Installation Tool System.
- AVK's Data Master will analyze every insert installation by virtue of the on board PLC. The Data Master Pistol sets the insert and transmits air pressure signals to the PLC and converts that into usable installation verification information. This data appears on the systems computer screen as a good or faulty installation. The data is stored and collected for current and future evaluation to substantiate proper insert placement, indicating correct product assembly installation.
- AVK's Data Master houses a redesigned space saving SPP3 Tool™ Power pack which is connected to the SPP3 Tool™ Pistol and linked to our on board PLC. Our Data Master collects data for SPC Analysis that you have set pertaining to your installation requirements and captures that data by using a standard spreadsheet software program. For installation verification for your company or customer's assemblies, please consider the AVK SPP3 Tool™ Data Master for secure joint integrity!








AVK SPP2 TOOL™ TOOL SPECIFICATIONS

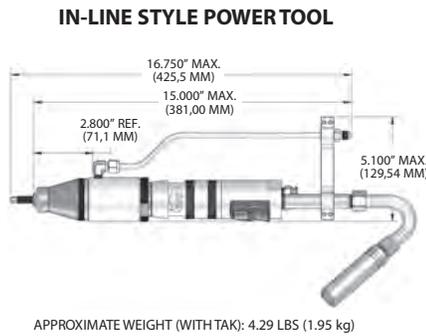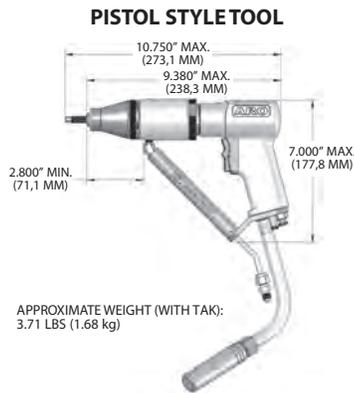

The SPP2 Tool™ hose assembly is available in 6', 8', 10', and 15' lengths. Hose weight 6'= 1.1 lbs., 8'= 1.32 lbs., 10'= 1.51 lbs., 15'= 2.0 lbs.

POWER CONTROL SYSTEM DIMENSIONS

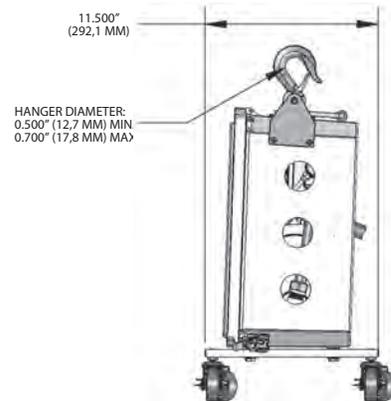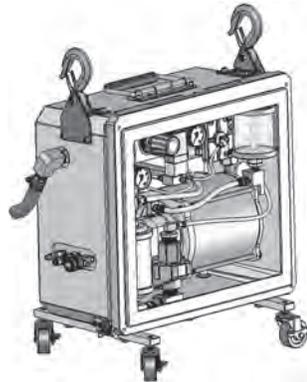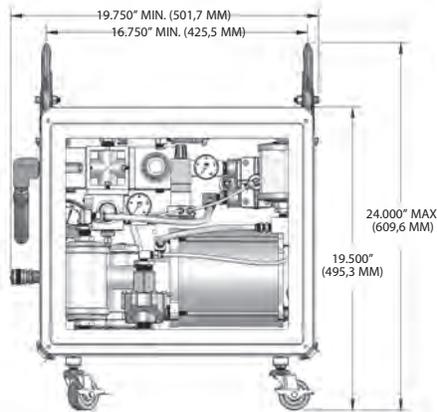

The hydraulic pull force capability of the SPP2 Tool™ is 7,500 lbs. max (35.6 kN) at 80 psi. Air pressure requirement to the power control system is 90 psi dynamic (6.2 bars).

PRODUCT / TOOL SELECTION

Product tool section added note: SPP2 Tool™ per the part numbers below will be supplied with mandrels to install 1st and 2nd grip fasteners. If longer grip fasteners are being used contact us for appropriate mandrel part numbers.

| PRODUCT SERIES | THREAD SIZE | STEEL | BRASS | ALUMINUM | MONEL | STAINLESS STEEL |
|----------------|----------------|-------|-------|----------|-------|---------------------|
| A-K, A-L | #6-1/2 M4-M12 | ✓ | ✓ | ✓ | ✓ | N/A |
| A-H | #6-1/2 M4-M12 | ✓ | ✓ | ✓ | ✓ | ✓ |
| A-S | #6-3/8 M4-M10 | ✓ | N/A | N/A | N/A | N/A |
| A-R | 1/4-3/8 M6-M10 | ✓ | N/A | N/A | N/A | N/A |
| A-T | #4-1/2 M3-M12 | ✓ | ✓ | ✓ | ✓ | ✓ |
| A-W | #6-3/8 M4-M10 | ✓ | ✓ | N/A | N/A | N/A |
| A-O | #6-3/8 M4-M10 | ✓ | N/A | N/A | ✓ | N/A |
| R-N | #4-1/2 M3-M12 | ✓ | N/A | ✓ | N/A | ✓ (up to 3/8 & M10) |

NOTE: See SPP2 Tool™ manual for set up, spare parts and preventative maintenance.

SAMPLE NUMBER: SPP2P8AL420

| SPP2 | () | () | () | () | () | | | |
|-------------|----------|-------------|----------|-------------|--------------------|----------|--------------------|--------------------------|
| SYSTEM TYPE | CALL OUT | TOOL TYPE | CALL OUT | HOSE LENGTH | POWER CONTROL TYPE | CALL OUT | SERIES | AVK THREAD SIZE CALL OUT |
| | P | Pistol | 6 | 6 Feet | | AL | A-L, A-K, A-H, A-O | |
| | IL | In Line | 8 | 8 Feet | | AR | A-R | |
| | MP | Mini Pistol | 10 | 10 Feet | | RN | R-N, A-T, A-W | |
| | | | 15 | 15 Feet | | AS | A-S | |



PORTABLE TOOLS

AVK PORTABLE BATTERY POWER TOOL - AVK4878

Portable Battery Power at your finger tips for Ease of Installation and Ergonomic comfort!
Worldwide first completely Electronic Power controlled Battery tool for the installation of High-Torque Blind Rivet Nuts and Blind Rivet Studs

- Electronic Process Control ensures a stable and consistent installation.
- Spin-Spin installation without adjustment on different material thicknesses.
- Easy to handle, simple adjustment.
- High Process Security.
- Suitable for High-Torque Steel Inserts M4 - M10/#6 - 3/8" and Studs M4 - M6/#6 - 1/4".



SPECIAL FEATURE—This tool nose cone design incorporates a special serrated tip that is essential to proper installation.



THREAD ADAPTION KIT

THREAD ADAPTION KIT SELECTION

| THREAD SIZE | THREAD ADAPTION KIT | THREAD ADAPTION KIT |
|----------------|---------------------|---------------------|
| 6-32 UNC | NPT632TAK | AKPT632TAK |
| 8-32 UNC | NPT832TAK | AKPT832TAK |
| 10-32 UNF | NPT1032TAK | AKPT1032TAK |
| 1/4-20 UNC | NPT420TAK | AKPT420TAK |
| 5/16-18 UNC | NPT518TAK | AKPT518TAK |
| 3/8-16 UNC | NPT616TAK | AKPT616TAK |
| M4 x 0,7 ISO | NPT470TAK | AKPT470TAK |
| M5 x 0,8 ISO | NPT580TAK | AKPT580TAK |
| M6 x 1,0 ISO | NPT610TAK | AKPT610TAK |
| M8 x 1,25 ISO | NPT8125TAK | AKPT8125TAK |
| M10 x 1,50 ISO | NPT1015TAK | AKPT1015TAK |

POWER TOOL FEATURES - BENEFITS

- No air lines.
- Existing AVK TAK's easily installed/removed.
- Sets M4 - M10/#6 - 3/8" inserts, and M4 - M6/#6 - 1/4" studs.
- Ergonomics better than typical installation tools - no wrist torque, balanced better.
- Quieter than air tools.
- Process security- audible and visual verification.
- Bright LED to illuminate installation hole.
- Incrementally adjustable (90 settings) within five sizes either English or Metric.
- Good (GO)/No Good (NO) electric readout after each install.
- Battery "Brain"- RFID chip prevents overcharging and monitors energy level stopping any action at 20% of battery life - No dropping off of power- No loose inserts.
- Installation is controlled electrically- not mechanically.
- After 1.5 million cycles tested no drop in Torque readings.
- One charge sets from 200 to 400 inserts depending on material.
- Single trigger operation.
- Highly portable.



AVK CVI™ (Cloud Verification Installation) INSERT TOOL - AVK6000


Cloud data collection, torque installation, tool adjustment and programmability of your tool by way of wireless connective links are at AVK for you!

Concerned about proper torque installation and confirmation of data to your customer, try the AVK CVI™ Cloud Verification Installation Tool to resolve your assembly concerns. Our CVI™ System will allow you to monitor and adjust up to 10 tools from your workstation or laptop with digital accuracy.

Rest assured that your CVI™ tool will have plenty of power for installation with the on board 20 volt battery. Ergonomic's is assured by a light weight 4.35 pound tool with a high impact composite body for durability. Our CVI™ tool is the perfect blend of cloud technology and a precision installation battery tool.

TOOL FEATURES - BENEFITS

- CVI™ uses standard AVK / TAK's and special adaption kits are available as well. Contact us.
- Will set all AVK products with the exception of R-N Rivet Nuts and CS™ Series Inserts.
- User friendly display module displays results and accepts programming inputs.
- Up to 8 user-programmable fastening configurations.
- Stores cycle data for up to 1,200 run downs.
- Ergonomic, 4.35 pounds (2kg.)
- Well balanced for ease of handling.
- Wireless communication option delivers process control with I/O, automatic configuration switching and real-time data archiving via Process Communication Module (PCM).
- Control 10 tools, verify torque installation and gather installation data via your work station or laptop.
- Programmable torque, angle and speed settings.
- Brushless motor tested beyond a million cycles.
- Super bright LED headlight with programmable on/off.
- Two 20V battery option provides maximum runtime.

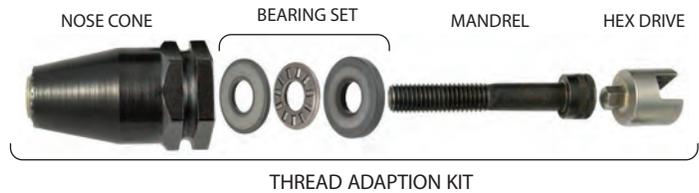

Digital backlit display module displays results and offers quick set-up programming inputs.



Using ICS software and a USB cable connection you can program or download data from the tool with your laptop.



Wireless communication option allows up to 10 tools to be connected to one PCM for data collection and configuration programming.



HAND TOOLS

AVK HAND TOOL SPECIFICATIONS

The tools shown on this page are engineered to install AVK's...



EXPENDABLE TOOLS

The following expendable tools are ideal for field repairs or consumer installation of AVK's products. Thread the AVK fastener onto the tool mandrel all the way up. Hold the tool with a box wrench and turn the mandrel with another box wrench or ratchet wrench until the AVK fastener is installed

| A-K, A-L, A-P, AND A-O SERIES 1st AND 2nd GRIP PRODUCT MODEL AA184 | | A-T AND A-W SERIES STANDARD PRODUCT MODEL AAT916 | |
|--|---------------|--|---------------|
| THREAD SIZE | TOOL PART NO. | THREAD SIZE | TOOL PART NO. |
| 4-40 UNC | N/A | 4-40 UNC | AAT916-440 |
| 6-32 UNC | AA184-632 | 6-32 UNC | AAT916-632 |
| 8-32 UNC | AA184-832 | 8-32 UNC | AAT916-832 |
| 10-24 UNC | AA184-1024 | 10-24 UNC | AAT916-1024 |
| 10-32 UNF | AA184-1032 | 10-32 UNF | AAT916-1032 |
| 1/4-20 UNC | AA184-420 | 1/4-20 UNC | AAT916-420 |
| 5/16-18 UNC | AA184-518 | 5/16-18 UNC | AAT916-518 |
| 3/8-16 UNC | AA184-616 | 3/8-16 UNC | AAT916-616 |
| 1/2-13 UNC | AA184-813 | 1/2-13 UNC | AAT916-813 |
| M3 x 0,5 ISO | N/A | M3 x 0,5 ISO | AAT916-350 |
| M4 x 0,7 ISO | AA184-470 | M4 x 0,7 ISO | AAT916-470 |
| M5 x 0,8 ISO | AA184-580 | M5 x 0,8 ISO | AAT916-580 |
| M6 x 1,0 ISO | AA184-610 | M6 x 1,0 ISO | AAT916-610 |
| M8 x 1,25 ISO | AA184-8125 | M8 x 1,25 ISO | AAT916-8125 |
| M10 x 1,5 ISO | AA184-1015 | M10 x 1,5 ISO | AAT916-1015 |
| M12 x 1,75 ISO | AA184-12175 | M12 x 1,75 ISO | AAT916-12175 |



AA170 PLIER TOOL

The AA170 tool is ideal for prototyping or making repairs with the A-K, A-L, A-H, A-P, A-O, E-L and E-H Series threaded inserts.



- INSTALLATION:**
- Thread AVK part onto tool.
 - Place into Hole
 - Squeeze handles.

| THREAD SIZE | CONVERSION KIT |
|---------------|----------------|
| 6-32 UNC | AA271-632 |
| 8-32 UNC | AA271-832 |
| 10-24 UNC | AA271-1024 |
| 10-32 UNF | AA271-1032 |
| 1/4-20 UNC | AA271-420 |
| 5/16-18 UNC | AA271-518* |
| 3/8-16 UNC | AA271-616* |
| M4 x 0,7 ISO | AA271-470 |
| M5 x 0,8 ISO | AA271-580 |
| M6 x 1,0 ISO | AA271-610 |
| M8 x 1,25 ISO | AA271-8125* |
| M10 x 1,5 ISO | AA271-1015* |

*These sizes cannot be used with 2nd grip AVK fasteners

AA112 HI-TORQUER™

The AA112 is ideal for prototyping or making repairs with the A-T and A-W Series threaded inserts. It features a patented Quick Change thread size nose assembly.



- INSTALLATION:**
- Thread insert fully onto mandrel.
 - Place into hole.
 - Hold grip bar while turning the "T" handle clockwise until insert is installed.
 - Turn "T" handle counter clockwise to remove from insert.

| THREAD SIZE | CONVERSION KIT |
|---------------|----------------|
| 4-40 UNC | AAT202-440 |
| 6-32 UNC | AAT202-632 |
| 8-32 UNC | AAT202-832 |
| 10-24 UNC | AAT202-1024 |
| 10-32 UNF | AAT202-1032 |
| 1/4-20 UNC | AAT202-420 |
| 5/16-18 UNC | AAT202-518 |
| 3/8-16 UNC | AAT202-616 |
| M3 x 0,5 ISO | AAT202-350 |
| M4 x 0,7 ISO | AAT202-470 |
| M5 x 0,8 ISO | AAT202-580 |
| M6 x 1,0 ISO | AAT202-610 |
| M8 x 1,25 ISO | AAT202-8125 |
| M10 x 1,5 ISO | AAT202-1015 |



AVK HAND TOOL SPECIFICATIONS

The hand tools shown on this page are used to install AVK's...

HAND TOOLS



AA480N & AA510N NEW "WRENCH-LESS" QUICK-RELEASE CONVERSION KIT

To provide a more user friendly manual tool for our marketplace, AVK's AA480N and AA510N installation hand tools now incorporate a new "Wrench-Less" quick-release conversion kit. AVK will continue to support pre-existing tools not utilizing this new conversion kit. When ordering conversion kits and mandrels for pre-existing tools, remove the "N" from the part number shown in the chart below. Please contact us for additional design change clarification.



New Mandrel

AA480N DOUBLE ACTION LEVER TOOL

The AA480N tool features a visual stroke indicator and a convenient spin-off removal knob. This tool installs the full range of AVK's spinwall technology product in steel and aluminum and limited sizes of steel and aluminum rivet nuts. See chart below.

INSTALLATION:

- Set the appropriate stroke per the AVK tool instruction sheet.
- Thread product fully onto tool mandrel.
- Place into the hole in your parent material.
- Squeeze tool handles together until product is fully collapsed.
- Spin center knob counter-clockwise unthreading tool mandrel from installed product.



AA510N PLUNGER-DOUBLE ACTION LEVER TOOL

The AA510N tool features a visual stroke indicator and a quick acting pull to remove plunger. Due to its larger size, this tool installs the full range of AVK's Spinwall Technology™ Threaded Insert Product in all materials and various steel and aluminum rivet nuts. See chart below.

INSTALLATION:

- Set the appropriate stroke per the AVK tool instruction sheet.
- Withdraw plunger from tool.
- Hold product over tool mandrel while pushing plunger into tool fully threading product onto the tool mandrel.
- Place into hole in your parent material.
- Squeeze tool handles together until product is fully collapsed.
- Pull plunger from tool unthreading mandrel from installed product.



• Denotes the product can be installed with the AA480N tool. + Denotes the product can be installed with the AA510N tool.

| THREAD SIZE | INSERT MATERIAL | | A-L, A-K, A-H, A-P, A-O SERIES INSERTS | | INSERT MATERIAL | | R-N, E-L, E-H, A-R* SERIES RIVET NUTS | | STUD MATERIAL | A-S SERIES STUDS | |
|----------------|-----------------|------|--|----------------------|-----------------|------|---------------------------------------|----------------------|---------------|------------------|----------------------|
| | STEEL | ALUM | CONVERSION KIT# | REPLACEMENT MANDREL# | STEEL | ALUM | CONVERSION KIT# | REPLACEMENT MANDREL# | STEEL | CONVERSION KIT# | REPLACEMENT MANDREL# |
| 4-40 UNC | | | N/A | N/A | • + | • + | AA483-440N | 18AA481-440N | | N/A | N/A |
| 6-32 UNC | • + | • + | AA481-632N | 18AA481-632N | • + | • + | AA483-632N | 18AA481-632N | • | AA485-632N | 18AA485-632N |
| 8-32 UNC | • + | • + | AA481-832N | 18AA481-832N | • + | • + | AA483-832N | 18AA481-832N | • | AA485-832N | 18AA485-832N |
| 10-24 UNC | • + | • + | AA481-1024N | 18AA481-1024N | • + | • + | AA483-1024N | 18AA481-1024N | • | AA485-1024N | 18AA485-1024N |
| 10-32 UNF | • + | • + | AA481-1032N | 18AA481-1032N | • + | • + | AA483-1032N | 18AA481-1032N | • | AA485-1032N | 18AA485-1032N |
| 1/4-20 UNC | • + | • + | AA481-420N | 18AA481-420N | • + | • + | AA483-420N | 18AA481-420N | • | AA485-420N | 18AA485-420N |
| 5/16-18 UNC | • + | • + | AA481-518N | 18AA481-518N | + | • + | AA483-518N | 18AA481-518N | • | AA485-518N | 18AA485-518N |
| 3/8-16 UNC | • + | • + | AA481-616N | 18AA481-616N | | + | AA483-616N | 18AA481-616N | • | AA485-616N | 18AA485-616N |
| 1/2-13 UNC | + | • + | AA481-813N | 18AA481-813N | | | N/A | N/A | | N/A | N/A |
| M3 x 0,5 ISO | | | N/A | N/A | • + | • + | AA483-350N | 18AA481-350N | | N/A | N/A |
| M4 x 0,7 ISO | • + | • + | AA481-470N | 18AA481-470N | • + | • + | AA483-470N | 18AA481-470N | • | AA485-470N | 18AA485-470N |
| M5 x 0,8 ISO | • + | • + | AA481-580N | 18AA481-580N | • + | • + | AA483-580N | 18AA481-580N | • | AA485-580N | 18AA485-580N |
| M6 x 1,0 ISO | • + | • + | AA481-610N | 18AA481-610N | • + | • + | AA483-610N | 18AA481-610N | • | AA485-610N | 18AA485-610N |
| M8 x 1,25 ISO | • + | • + | AA481-8125N | 18AA481-8125N | + | • + | AA483-8125N | 18AA481-8125N | • | AA485-8125N | 18AA485-8125N |
| M10 x 1,5 ISO | • + | • + | AA481-1015N | 18AA481-1015N | | + | AA483-1015N | 18AA481-1015N | • | AA485-1015N | 18AA485-1015N |
| M12 x 1,75 ISO | + | • + | AA481-12175N | 18AA481-12175N | | | N/A | N/A | | N/A | N/A |

NOTE: Additional UNF fine thread sizes are available. Contact us for details.

WARNING: Failure to adjust the appropriate stroke setting per the AVK tool instruction sheet may damage the tool.

*Contact us for A-R Series Installation Tool Data



AVK KIT SPECIFICATIONS

The Master Assortment Kits shown on this page have been designed for prototype, maintenance and repair applications.

A-L SERIES INSERT MASTER ASSORTMENT KITS

The A-L Series Kit is ideal for prototype and maintenance repair applications. The rugged hard shell plastic kit contains quantities of the A-L Series threaded inserts and the AA170 plier tool shown on page 40. It also contains a full compliment of thread size conversion kits and instruction label.



INCH SIZE KIT PART NUMBER AVK 2292

| THREAD SIZE | INSERT QUANTITY | REFILL PAK PART NUMBER | CONVERSION KIT PART NUMBER |
|-------------|-----------------|------------------------|----------------------------|
| 6-32 UNC | 50 | AALS4T-632-80 | AA271-632 |
| 8-32 UNC | 50 | AALS4T-832-80 | AA271-832 |
| 10-32 UNF | 50 | AALS4T-1032-130 | AA271-1032 |
| 1/4-20 UNC | 50 | AALS4T-420-165 | AA271-420 |
| 5/16-18 UNC | 25 | AALS4T-518-150 | AA271-518 |
| 3/8-16 UNC | 25 | AALS4T-616-150 | AA271-616 |

METRIC SIZE KIT PART NUMBER AVK 2293

| THREAD SIZE | INSERT QUANTITY | REFILL PAK PART NUMBER | CONVERSION KIT PART NUMBER |
|---------------|-----------------|------------------------|----------------------------|
| M4 x 0,7 ISO | 50 | AALS4T-470-2.0 | AA271-470 |
| M5 x 0,8 ISO | 50 | AALS4T-580-3.3 | AA271-580 |
| M6 x 1,0 ISO | 50 | AALS4T-610-4.2 | AA271-610 |
| M8 x 1,25 ISO | 25 | AALS4T-8125-3.8 | AA271-8125 |
| M10 x 1,5 ISO | 25 | AALS4T-1015-3.8 | AA271-1015 |

A-T SERIES INSERT MASTER ASSORTMENT KITS

The A-T Series master assortment kit is ideal for prototype and maintenance repair applications. The rugged hard shell plastic kit contains quantities of the A-T Series Inserts and the AA112 Hi-torquer tool shown on page 40. It also contains a full compliment of thread size conversion kits and instruction label.



INCH SIZE KIT PART NUMBER AAT312A

| THREAD SIZE | INSERT QUANTITY | REFILL PAK PART NUMBER | CONVERSION KIT PART NUMBER |
|-------------|-----------------|------------------------|----------------------------|
| 4-40 UNC | 50 | AAT400-440 | AAT202-440 |
| 6-32 UNC | 50 | AAT400-632 | AAT202-632 |
| 8-32 UNC | 50 | AAT400-832 | AAT202-832 |
| 10-32 UNF | 50 | AAT400-1032 | AAT202-1032 |
| 1/4-20 UNC | 50 | AAT400-420 | AAT202-420 |
| 5/16-18 UNC | 25 | AAT400-518 | AAT202-518 |


METRIC SIZE KIT PART NUMBER AAT312B

| THREAD SIZE | INSERT QUANTITY | REFILL PAK PART NUMBER | CONVERSION KIT PART NUMBER |
|---------------|-----------------|------------------------|----------------------------|
| M3 x 0,5 ISO | 50 | AAT400-350 | AAT202-350 |
| M4 x 0,7 ISO | 50 | AAT400-470 | AAT202-470 |
| M5 x 0,8 ISO | 50 | AAT400-580 | AAT202-580 |
| M6 x 1,0 ISO | 50 | AAT400-610 | AAT202-610 |
| M8 x 1,25 ISO | 25 | AAT400-8125 | AAT202-8125 |




DESIGN CONSIDERATIONS/APPLICATION CHECKLIST

The following BEST PRACTICE information should be considered to insure proper application design when using AVK fasteners. If you have any application questions, please contact us.

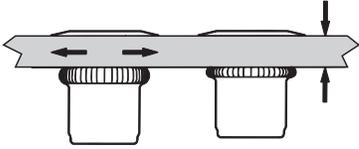


PARENT MATERIAL

The parent material should be dense enough to support the hole fill and clamp load applied by the AVK fastener during installation. Its thickness should be within the grip range of the AVK fastener. Experimentation is suggested to determine optimum fastener selection for plastics.




HOLE SIZE

The hole produced in the parent material should be per the AVK catalog specifications. Tolerance for paint or coating buildup should be included to avoid an undersized hole condition. The hole should be square to the parent material. Care should be taken if utilizing punched holes. Oversized condition may occur on breakout side of parent material.




AVK PART ACCESS

The AVK fastener head should sit flat on the parent material. An obstruction to the tail of the AVK product or to the access of the power tool can be corrected by contacting us for alternative fastener designs and tooling configurations. The AVK tool should be held perpendicular to the application to avoid excess mandrel wear.




BACKSIDE SURFACE

The backside surface of the parent material should not contain a punch slug or excessive burr that exceeds the grip range of the AVK fastener. Such large obstructions may prohibit the AVK fastener from installing properly.




AIR SUPPLY

AVK's Spinwall Technology™ ARO brand installation tools require a pressure range of 60-110 PSI (4,1-7,5 BARS) at 25 S.C.F.M. of volume. Hose and fitting inside diameters need to be a minimum of 5/16 (7,92). An inline oiler and pressure regulator is required. Pressure should be measured as dynamic with the tool running.




MATING PART HOLE SIZE/ALIGNMENT

The mating part being attached should be non-rotational and contact the head of the AVK fastener. Its hole size should be .040 (1,0) smaller than the head diameter of the AVK fastener. The alignment of the mating part must provide perpendicular entry of the mating fastener into the AVK fastener.



MATING FASTENER

For the A-K, A-L, A-T, A-W and A-O Series the mating fastener should be of a "free-spinning" design and of the grade or class as indicated in this catalog. If a mechanical, chemical locking or prevailing torque element is required, AVK recommends the design selection of the A-H Series in a hex punched hole. Specification of a dog point screw will minimize cross threading and speed the assembly process in any AVK application. Mating screws should be hand started and then power driven to minimize cross threading.



ASSEMBLY TORQUE

For appropriate assembly torques, see the suggested assembly torque data contained on page 44. AVK's products, when used per the data provided in this catalog, have been designed to be compatible with the torque requirements of Grade 5 or Metric Class 8.8/9.8 screws. AVK suggests customer testing to determine the optimum torque due to mating component fit and mating fastener lubrication/finish variations.



AVK TEST DATA

The test data on this page is intended to provide the designer with approximate strength values in various materials and thicknesses. The figures shown are averages of multiple tests. AVK recommends that this data be used only as a guide since various application factors may affect AVK product performance. We recommend testing your application when an exact strength figure is required or the load to be applied comes close to the published data.

Unified (Inch) thread size data is provided in pounds (lbs.) for force and inch pounds (in-lbs.) for torque. Metric data is provided in kilonewtons (kN) for force and newton meters (Nm) for torque.



PULL-OUT is the force required to pull the AVK product from the parent material. The parent material is restrained by a hold down ring 3x the AVK part "D" dim.

PUSH-OUT is the force required to push the AVK product through the parent material. The parent material is supported by a hold down ring 3x the AVK part "D" dim.

SPIN-OUT is the torque required to turn the AVK product in the parent material after installation without influencing clamp load on the AVK product.

ASSEMBLY TORQUE is the amount of torque suggested for Grade 5 or Metric Class 8.8/9.8 mating hardware based on industry standards.

A-L, A-K, A-H, A-S Series product was tested with the -4 finish. R-N Series was Cadmium plated.

| THREAD SIZE | PULL-OUT | | | | | | | | PUSH-OUT | SPIN-OUT* | | ASSEMBLY TORQUE | |
|-------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|-----------------|------|
| | IN STEEL SHEET | | | | IN ALUMINUM SHEET | | | | | IN STEEL | IN ALUM | | |
| | .030 in. 0,76 mm | .062 in. 1,57 mm | .090 in. 2,28 mm | .125 in. 3,17 mm | .030 in. 0,76 mm | .062 in. 1,57 mm | .090 in. 2,28 mm | .125 in. 3,17 mm | .125 in. 3,17 mm | .062 in. 1,57 mm | .062 in. 1,57 mm | | |
| A-L / A-K SERIES | 6-32 | 310 | 850 | 1570 | 1830 | 320 | 830 | 1450 | 1580 | | | 12 | |
| | 8-32 | 310 | 850 | 1570 | 1830 | 320 | 830 | 1450 | 1580 | | | 22 | |
| | 10-24 | 460 | 1020 | 1730 | 2670 | 440 | 1000 | 1700 | 2380 | | | 32 | |
| | 10-32 | 460 | 1020 | 1730 | 2670 | 440 | 1000 | 1700 | 2380 | | | 36 | |
| | 1/4-20 | 510 | 1270 | 2090 | 3250 | 490 | 1180 | 1920 | 3020 | | | 75 | |
| | 5/16-18 | 520 | 1370 | 2380 | 3810 | 500 | 1350 | 2230 | 3670 | | | 156 | |
| | 3/8-16 | 520 | 1370 | 2380 | 3810 | 500 | 1350 | 2230 | 3670 | | | 276 | |
| | 1/2-13 | | 2000 | 3040 | 4480 | | 1830 | 2940 | 4350 | | | 660 | |
| | M4 | 1.4 | 3.8 | 7.0 | 8.1 | 1.4 | 3.7 | 6.5 | 7.0 | | | 2.5 | |
| | M5 | 2.0 | 4.5 | 7.7 | 11.9 | 2.0 | 4.5 | 7.6 | 10.6 | | | 5.0 | |
| | M6 | 2.3 | 5.7 | 9.3 | 14.5 | 2.2 | 5.3 | 8.5 | 13.4 | | | 8.6 | |
| | M8 | 2.3 | 6.1 | 10.6 | 17.0 | 2.2 | 6.0 | 9.9 | 16.3 | | | 21.0 | |
| M10 | 2.3 | 6.1 | 10.6 | 17.0 | 2.2 | 6.0 | 9.9 | 16.3 | | | 42.0 | | |
| M12 | | 8.9 | 13.5 | 19.9 | | 8.1 | 13.1 | 19.4 | | | 72.0 | | |
| A-H SERIES | 6-32 | 270 | 660 | 990 | 860 | 270 | 660 | 830 | 840 | 40 | 40 | 12 | |
| | 8-32 | 270 | 660 | 990 | 860 | 270 | 660 | 830 | 840 | 40 | 40 | 22 | |
| | 10-24 | 420 | 990 | 1670 | 2520 | 380 | 880 | 1550 | 2050 | 80 | 70 | 32 | |
| | 10-32 | 420 | 990 | 1670 | 2520 | 380 | 880 | 1550 | 2050 | 80 | 70 | 36 | |
| | 1/4-20 | 460 | 1150 | 1780 | 2690 | 430 | 1530 | 2240 | 3210 | 130 | 90 | 75 | |
| | 5/16-18 | 480 | 1110 | 1870 | 2280 | 460 | 1050 | 1680 | 2890 | 240 | 230 | 156 | |
| | 3/8-16 | 480 | 1110 | 1870 | 2280 | 460 | 1050 | 1680 | 2890 | 240 | 230 | 276 | |
| | M4 | 1.2 | 2.9 | 4.4 | 3.8 | 1.2 | 2.9 | 3.7 | 3.7 | 4.5 | 4.5 | 2.5 | |
| | M5 | 1.9 | 4.4 | 7.4 | 11.2 | 1.7 | 3.9 | 6.9 | 9.1 | 9.0 | 7.9 | 5.0 | |
| | M6 | 2.0 | 5.1 | 7.9 | 12.0 | 1.9 | 6.8 | 10.0 | 14.3 | 14.7 | 10.2 | 8.6 | |
| | M8 | 2.1 | 4.9 | 8.3 | 10.1 | 2.0 | 4.7 | 7.5 | 12.9 | 27.1 | 25.5 | 21.0 | |
| | M10 | 2.1 | 4.9 | 8.3 | 10.1 | 2.0 | 4.7 | 7.5 | 12.9 | 27.1 | 25.5 | 42.0 | |
| A-S SERIES | 6-32 | 310 | 850 | 1570 | 1830 | 320 | 830 | 1450 | 1580 | 630 | | 12 | |
| | 8-32 | 310 | 850 | 1570 | 1830 | 320 | 830 | 1450 | 1580 | 630 | | 22 | |
| | 10-24 | 460 | 1020 | 1730 | 2670 | 440 | 1000 | 1700 | 2380 | 580 | | 32 | |
| | 10-32 | 460 | 1020 | 1730 | 2670 | 440 | 1000 | 1700 | 2380 | 580 | | 36 | |
| | 1/4-20 | 510 | 1270 | 2090 | 3250 | 490 | 1180 | 1920 | 3020 | 880 | | 75 | |
| | 5/16-18 | 520 | 1370 | 2380 | 3810 | 500 | 1350 | 2230 | 3670 | 1140 | | 156 | |
| | 3/8-16 | 520 | 1370 | 2380 | 3810 | 500 | 1350 | 2230 | 3670 | 1160 | | 276 | |
| | M4 | 1.4 | 3.8 | 7.0 | 8.1 | 1.4 | 3.7 | 6.5 | 4.4 | 2.7 | | 2.5 | |
| | M5 | 2.0 | 4.5 | 7.7 | 11.9 | 2.0 | 4.5 | 7.6 | 10.6 | 2.5 | | 5.0 | |
| | M6 | 2.3 | 5.7 | 9.3 | 14.5 | 2.2 | 5.3 | 8.5 | 13.4 | 3.8 | | 8.6 | |
| | M8 | 2.3 | 6.1 | 10.6 | 17.0 | 2.2 | 6.0 | 9.9 | 16.3 | 5.0 | | 21.0 | |
| | M10 | 2.3 | 6.1 | 10.6 | 17.0 | 2.2 | 6.0 | 9.9 | 16.3 | 5.1 | | 42.0 | |
| R-N SERIES | 1/4-20 | 350 | 860 | 1770 | | 400 | 850 | 2100 | | 2000 | 100 | 60 | 75 |
| | 5/16-18 | 580 | 1210 | 2010 | | 540 | 1110 | 2244 | | 2690 | 180 | 110 | 156 |
| | 3/8-16 | 630 | 1230 | 2050 | | 590 | 1180 | 2110 | | 3700 | 320 | 120 | 276 |
| | 1/2-13 | 620 | 1320 | 2240 | | 780 | 1390 | 2643 | | 3880 | 450 | 220 | 660 |
| | M6 | 1.5 | 3.7 | 7.8 | | 1.7 | 3.7 | 9.3 | | 8.8 | 16.8 | 10.6 | 8.6 |
| | M8 | 2.5 | 5.3 | 8.9 | | 2.6 | 2.9 | 9.9 | | 11.9 | 30.3 | 12.7 | 21.0 |
| | M10 | 2.7 | 5.4 | 9.0 | | 2.6 | 5.2 | 9.3 | | 16.4 | 40.2 | 13.5 | 42.0 |
| | M12 | 2.7 | 5.8 | 9.9 | | 3.4 | 6.1 | 11.7 | | 17.2 | 53.3 | 48.8 | 72.0 |

NOTE 1: Ultimate torque testing should be done using actual customer components and mating hardware due to plating/lubrication variables. AVK's fasteners have been designed to exceed the ultimate torque strength of the appropriate grade/class of mating hardware.

NOTE 2: For test data on other AVK products, contact us.

*NOTE 3: R-N Series Spin-out. Test drop values are keyed steel rivet nuts tested in steel plates and keyed aluminum rivet nut tested in 2024-T4 aluminum plates.



DECIMAL EQUIVALENTS & DRILL SIZE CHART

| DRILL SIZE | INCH (Dec.) | METRIC (mm) | DRILL SIZE | INCH (Dec.) | METRIC (mm) | DRILL SIZE | INCH (Dec.) | METRIC (mm) | DRILL SIZE | INCH (Dec.) | METRIC (mm) | DRILL SIZE | INCH (Dec.) | METRIC (mm) |
|------------|-------------|-------------|------------|-------------|-------------|------------|-------------|-------------|------------|-------------|-------------|------------|-------------|-------------|
| 80 | .0135 | .343 | 50 | .0700 | 1,778 | 22 | .1570 | 3,988 | G | .2610 | 6,630 | 31/64 | .4844 | 12,304 |
| 79 | .0145 | .368 | 49 | .0730 | 1,854 | 21 | .1590 | 4,039 | 17/64 | .2656 | 6,746 | 1/2 | .5000 | 12,700 |
| 1/64 | .0156 | .396 | 48 | .0760 | 1,930 | 20 | .1610 | 4,089 | H | .2660 | 6,756 | 33/64 | .5156 | 13,096 |
| 78 | .0160 | .406 | 5/64 | .0781 | 1,984 | 19 | .1660 | 4,216 | I | .2720 | 6,909 | 17/32 | .5312 | 13,492 |
| 77 | .0180 | .457 | 47 | .0785 | 1,994 | 18 | .1695 | 4,305 | J | .2770 | 7,036 | 35/64 | .5469 | 13,891 |
| 76 | .0200 | .508 | 46 | .0810 | 2,057 | 11/64 | .1719 | 4,366 | K | .2810 | 7,137 | 9/16 | .5625 | 14,288 |
| 75 | .0210 | .533 | 45 | .0820 | 2,083 | 17 | .1730 | 4,394 | 9/32 | .2812 | 7,142 | 37/64 | .5781 | 14,684 |
| 74 | .0225 | .572 | 44 | .0860 | 2,184 | 16 | .1770 | 4,496 | L | .2900 | 7,366 | 19/32 | .5938 | 15,083 |
| 73 | .0240 | .609 | 43 | .0890 | 2,261 | 15 | .1800 | 4,572 | M | .2950 | 7,493 | 39/64 | .6094 | 15,479 |
| 72 | .0250 | .635 | 42 | .0935 | 2,375 | 14 | .1820 | 4,623 | 19/64 | .2969 | 7,541 | 5/8 | .6250 | 15,875 |
| 71 | .0260 | .660 | 3/32 | .0938 | 2,383 | 13 | .1850 | 4,700 | N | .3020 | 7,671 | 41/64 | .6406 | 16,271 |
| 70 | .0280 | .711 | 41 | .0960 | 2,438 | 3/16 | .1875 | 4,763 | 5/16 | .3125 | 7,938 | 21/32 | .6562 | 16,667 |
| 69 | .0292 | .742 | 40 | .0980 | 2,489 | 12 | .1890 | 4,801 | O | .3160 | 8,026 | 43/64 | .6719 | 17,066 |
| 68 | .0310 | .787 | 39 | .0995 | 2,527 | 11 | .1910 | 4,851 | P | .3230 | 8,204 | 11/16 | .6875 | 17,463 |
| 1/32 | .0312 | .792 | 38 | .1015 | 2,578 | 10 | .1935 | 4,915 | 21/64 | .3281 | 8,334 | 45/64 | .7031 | 17,859 |
| 67 | .0320 | .813 | 37 | .1040 | 2,642 | 9 | .1960 | 4,978 | Q | .3320 | 8,433 | 23/32 | .7188 | 18,258 |
| 66 | .0330 | .838 | 36 | .1065 | 2,705 | 8 | .1990 | 5,055 | R | .3390 | 8,611 | 47/64 | .7344 | 18,654 |
| 65 | .0350 | .889 | 7/64 | .1094 | 2,779 | 7 | .2010 | 5,105 | 11/32 | .3438 | 8,733 | 3/4 | .7500 | 19,050 |
| 64 | .0360 | .914 | 35 | .1100 | 2,794 | 13/64 | .2031 | 5,159 | S | .3480 | 8,839 | 49/64 | .7656 | 19,446 |
| 63 | .0370 | .940 | 34 | .1110 | 2,819 | 6 | .2040 | 5,182 | T | .3580 | 9,093 | 25/32 | .7812 | 19,842 |
| 62 | .0380 | .965 | 33 | .1130 | 2,870 | 5 | .2055 | 5,220 | 23/64 | .3594 | 9,129 | 51/64 | .7969 | 20,241 |
| 61 | .0390 | .991 | 32 | .1160 | 2,946 | 4 | .2090 | 5,309 | U | .3680 | 9,347 | 13/16 | .8125 | 20,638 |
| 60 | .0400 | 1,016 | 31 | .1200 | 3,048 | 3 | .2130 | 5,410 | 3/8 | .3750 | 9,525 | 53/64 | .8281 | 21,034 |
| 59 | .0410 | 1,041 | 1/8 | .1250 | 3,175 | 7/32 | .2188 | 5,558 | V | .3770 | 9,576 | 27/32 | .8438 | 21,433 |
| 58 | .0420 | 1,067 | 30 | .1285 | 3,264 | 2 | .2210 | 5,613 | W | .3860 | 9,804 | 55/64 | .8594 | 21,829 |
| 57 | .0430 | 1,092 | 29 | .1360 | 3,454 | 1 | .2280 | 5,791 | 25/64 | .3906 | 9,921 | 7/8 | .8750 | 22,225 |
| 56 | .0465 | 1,181 | 28 | .1405 | 3,569 | A | .2340 | 5,944 | X | .3970 | 10,084 | 57/64 | .8906 | 22,621 |
| 3/64 | .0469 | 1,191 | 9/64 | .1406 | 3,571 | 15/64 | .2344 | 5,954 | Y | .4040 | 10,262 | 29/32 | .9062 | 23,017 |
| 55 | .0520 | 1,321 | 27 | .1440 | 3,658 | B | .2380 | 6,045 | 13/32 | .4062 | 10,317 | 59/64 | .9219 | 23,416 |
| 54 | .0550 | 1,397 | 26 | .1470 | 3,734 | C | .2420 | 6,147 | Z | .4130 | 10,490 | 15/16 | .9375 | 23,813 |
| 53 | .0595 | 1,511 | 25 | .1495 | 3,797 | D | .2460 | 6,248 | 27/64 | .4219 | 10,716 | 61/64 | .9531 | 24,209 |
| 1/16 | .0625 | 1,588 | 24 | .1520 | 3,861 | 1/4 | .2500 | 6,350 | 7/16 | .4375 | 11,113 | 31/32 | .9688 | 24,608 |
| 52 | .0635 | 1,613 | 23 | .1540 | 3,912 | E | .2500 | 6,350 | 29/64 | .4531 | 11,509 | 63/64 | .9844 | 25,004 |
| 51 | .0670 | 1,702 | 5/32 | .1562 | 3,967 | F | .2570 | 6,528 | 15/32 | .4688 | 11,908 | 1 | 1.000 | 25,400 |

DECIMAL EQUIVALENT OF STANDARD GAUGE SHEET ALUMINUM & SHEET METAL

| NO. OF GAUGE | GAUGE | | NO. OF GAUGE | GAUGE | | NO. OF GAUGE | GAUGE | |
|--------------|------------|-----------------|--------------|------------|-----------------|--------------|------------|-----------------|
| | ALUM (B&S) | STEEL (US STD.) | | ALUM (B&S) | STEEL (US STD.) | | ALUM (B&S) | STEEL (US STD.) |
| 10 | .1019 | .1345 | 17 | .0453 | .0538 | 24 | .0201 | .0239 |
| 11 | .0907 | .1196 | 18 | .0403 | .0478 | 25 | .0179 | .0209 |
| 12 | .0808 | .1046 | 19 | .0359 | .0418 | 26 | .0159 | .0179 |
| 13 | .0720 | .0897 | 20 | .0320 | .0359 | 27 | .0142 | .0164 |
| 14 | .0641 | .0747 | 21 | .0285 | .0329 | 28 | .0126 | .0149 |
| 15 | .0571 | .0673 | 22 | .0253 | .0299 | 29 | .0113 | .0135 |
| 16 | .0508 | .0598 | 23 | .0226 | .0269 | 30 | .0100 | .0120 |

SUGGESTED ASSEMBLY TORQUE VALUES TO PRODUCE CORRESPONDING BOLT LOADS

| THREAD SIZE | SAE GRADE 5 BOLTS | | |
|-------------|-------------------|-------------------|----------------------|
| | CLAMP LOAD | ASSY TORQUE - DRY | ASSY TORQUE - PLATED |
| #4-40 | 380 lbs. | 8 in.- lbs. | 6 in.- lbs. |
| #6-32 | 580 lbs. | 16 in.- lbs. | 12 in.- lbs. |
| #8-32 | 900 lbs. | 30 in.- lbs. | 22 in.- lbs. |
| #10-24 | 1120 lbs. | 43 in.- lbs. | 32 in.- lbs. |
| #10-32 | 1285 lbs. | 49 in.- lbs. | 36 in.- lbs. |
| 1/4-20 | 2000 lbs. | 96 in.- lbs. | 75 in.- lbs. |
| 1/4-28 | 2300 lbs. | 120 in.- lbs. | 86 in.- lbs. |
| 5/16-18 | 3350 lbs. | 204 in.- lbs. | 156 in.- lbs. |
| 5/16-24 | 3700 lbs. | 228 in.- lbs. | 168 in.- lbs. |
| 3/8-16 | 4950 lbs. | 360 in.- lbs. | 276 in.- lbs. |
| 3/8-24 | 5600 lbs. | 420 in.- lbs. | 300 in.- lbs. |

METRIC CONVERSIONS

| | | |
|-----------------|---|---|
| LINEAR | Multiply INCHES by 25.4 to get MILLIMETERS (mm) Multiply FEET by 0.3048 to get METERS (m) Multiply INCHES by 2.54 to get CENTIMETERS (cm) | Multiply MILLIMETERS (mm) by .03937 to get INCHES Multiply METERS (m) by 3.281 to get FEET Multiply CENTIMETERS (cm) by .3937 to get INCHES |
| TORQUE | Multiply INCH-POUNDS by 0.11298 to get NEWTON-METERS (Nm) Multiply FOOT-POUNDS by 1.3558 to get NEWTON-METERS (Nm) | Multiply NEWTON-METERS (Nm) by 8.851 to get INCH-POUNDS Multiply NEWTON-METERS (Nm) by 0.7376 to get FOOT-POUNDS |
| FORCE | Multiply POUNDS by .00445 to get KILONEWTONS (kN) | Multiply KILONEWTONS (kN) by 224.72 to get POUNDS |
| PRESSURE | Multiply PSI by .069 to get BARS | Multiply BARS by 14.5 to get PSI |

TROUBLE SHOOTING

| SYMPTOM | CHECK LIST |
|--|---|
| 1. Tool does not operate. | Air lines clear? Tool inlet clear? Tool exhaust clear? Motor Lubrication? |
| 2. Tool runs but stalls before product is installed. | Proper tool RPM for thread size being used? Adequate air pressure with tool running? TAK bearing in place and lubricated? Damaged mandrel? Wrong grip part? |
| 3. Tool strips product threads. | Proper tool RPM for thread size being used? Too much air pressure? Has the mandrel worn too small? |
| 4. Mandrels wear/break. | Is there too much air pressure? Is the tool being held perpendicular during installation? |



PLATING CHART

| AK, AL, AH, AS, AO, AT, AW, RN, EL, EH & CS SERIES PRODUCT FINISHES | | | | | | |
|---|-----------------------|---|-----------|--------------------|-----------------|---------------|
| AVK# | TYPE | SPECIFICATION | THICKNESS | COLOR | WHITE CORROSION | RED CORROSION |
| 1 | Plain Finish | Plain with clear protective coating | | Clear | No Req. | No Req. |
| 2* | Cad Plate/Clear | AMS-QQ-P-416, TY I Class 3, clear and clear protective coating | .0002 min | Silver | No Req. | No Req. |
| 3 | Zinc | ASTM-B-633, Fe/Zn 8μ, with clear protective coating | .0003 min | Silver | 12 hrs | No Req. |
| | | AVK SPEC ESP-P-006 | .0003 min | Silver | 12 hrs | No Req. |
| 3R | Zinc | ASTM-B-633, Fe/Zn 8μ | .0003 min | Silver | 12 hrs | No Req. |
| | | AVK SPEC ESP-P-006 | .0003 min | Silver | 12 hrs | No Req. |
| 3T | Zinc Trivalent | ASTM-B-633, Fe/Zn 8μ, with clear protective coating | .0003 min | Silver | 72 hrs | No Req. |
| | | AVK SPEC ESP-P-003 | .0003 min | Silver | 120 hrs | 384 hrs |
| 4 | Yellow Zinc | ASTM-B-633, Fe/Zn 8μ, with clear protective coating | .0005 min | Yellow | 96 hrs | No Req. |
| 4T | Yellow Zinc Trivalent | ASTM-B-633, Fe/Zn 8μ, with clear protective coating | .0003 min | Yellow | 120 hrs | No Req. |
| | | AVK SPEC ESP-P-002 | .0003 min | Yellow | 120 hrs | 458 - 800 hrs |
| 5* | Dull Tin | MIL-T-10727 TY I with clear protective coating | .0003 min | Gray | No Req. | 24 hrs |
| 6* | Silver Plate | QQ-S-365 TY III, Grade A with clear protective coating | .0003 min | Silver | 96 hrs | No Req. |
| 7 | Cadmium | AMS-QQ-P-416 TY II, class 2 yellow dichromate with clear protective coating | .0003 min | Gold | 96 hrs | No Req. |
| 8 | Chemical Film | MIL-C 5541 with clear protective coating | Film | No Color Specified | 120 hrs | No Req. |
| 9 | Yellow Tin Zinc | BPS-TZ-327 8μ, with clear protective coating | .0003 min | Dull Gold | 120 hrs | 300 hrs |
| | | AVK SPEC ESP-P-007 | .0003 min | Dull Gold | 120 hrs | 300 hrs |
| 9A | Yellow Tin Zinc | BPS-TZ-327 10μ, with clear protective coating | .0004 min | Dull Gold | 120 hrs | 400 hrs |
| | | AVK SPEC ESP-P-007 (9A) | .0004 min | Dull Gold | 120 hrs | 400 hrs |
| 9B | Yellow Tin Zinc | BPS-TZ-327 12μ, with clear protective coating | .0005 min | Dull Gold | 120 hrs | 500 hrs |
| | | AVK SPEC ESP-P-007 (9B) | .0005 min | Dull Gold | 120 hrs | 500 hrs |
| 9T* | Tin Zinc Trivalent | ESP-P-004 8μ, with clear protective coating | .0003 min | Silver | 120 hrs | 500 - 800 hrs |
| 10 | Zinc Nickel | BPS-TZ-427 8μ, with clear protective coating | .0003 min | Silver | 240 hrs | 1000 hrs |

Note 1: All of these finishes may be applied to any of the products listed at the top of the above chart.

Note 2: *These finishes minus the clear protective coating can be applied to our AT and AW series products.

Note 3: AVK reserves the right to substitute Trivalent ("T") finishes as an alternative on orders placed under non ROHS compliant platings.

Example: ALS9T-420-165 may substitute ALS9-420-165

Note 4: All Trivalent plating meets or exceeds Hexavalent plating requirements.

AVK INDUSTRIAL PRODUCTS

AVK Industrial Products, a Precision Castparts Company, produces all of its blind threaded captive fasteners at its factory in Southern California which is located just miles northwest of downtown Los Angeles. We have been manufacturing high quality blind threaded captive fasteners for over 30 years.

AVK FASTENERS ARE MADE IN THE U.S.A

AVK's Quality Management System is registered to ISO/TS16949 and ISO9001

AVK's Environmental Management System is registered to ISO14001

A-L Series, A-K Series, A-H Series, A-R Series, A-S Series, A-T Series, A-O Series, R-N Series, E-L Series, E-H Series, Composi-Sert, C-S Series, C-L Series, One-Set, OST, PreSet, SPP2 Tool, SPP3 Tool Data Master, CVI, Hi-Torquer, "Improving The Way We Assemble The World," and Spinwall Technology are Trademarks of Avibank Mfg., Inc. A-W Series, AVK and  are Registered Trademarks of Avibank Mfg., Inc. Lubriplate is a registered trademark of Lubriplate Lubricants Co.



AVK INDUSTRIAL PRODUCTS

A **PCC** COMPANY

AVK RESERVES THE RIGHT TO CHANGE PRODUCT SPECIFICATIONS TO IMPLEMENT QUALITY IMPROVEMENTS OR PART PERFORMANCE. SPECIFICATIONS PROVIDED PRIOR TO APRIL 2013 HAVE BEEN UPDATED IN THIS CATALOG.